


# TimiCon SCH Series

## Solar Charge Controller

- ◆ 12V/24V/36V/48V Auto Work
- ◆ MPPT Efficiency >99.5%
- ◆ Peak Conversion Efficiency 98.5%
- ◆ Wide Range PV Input 18V~150V
- ◆ IP45, With Heatsink Cooling

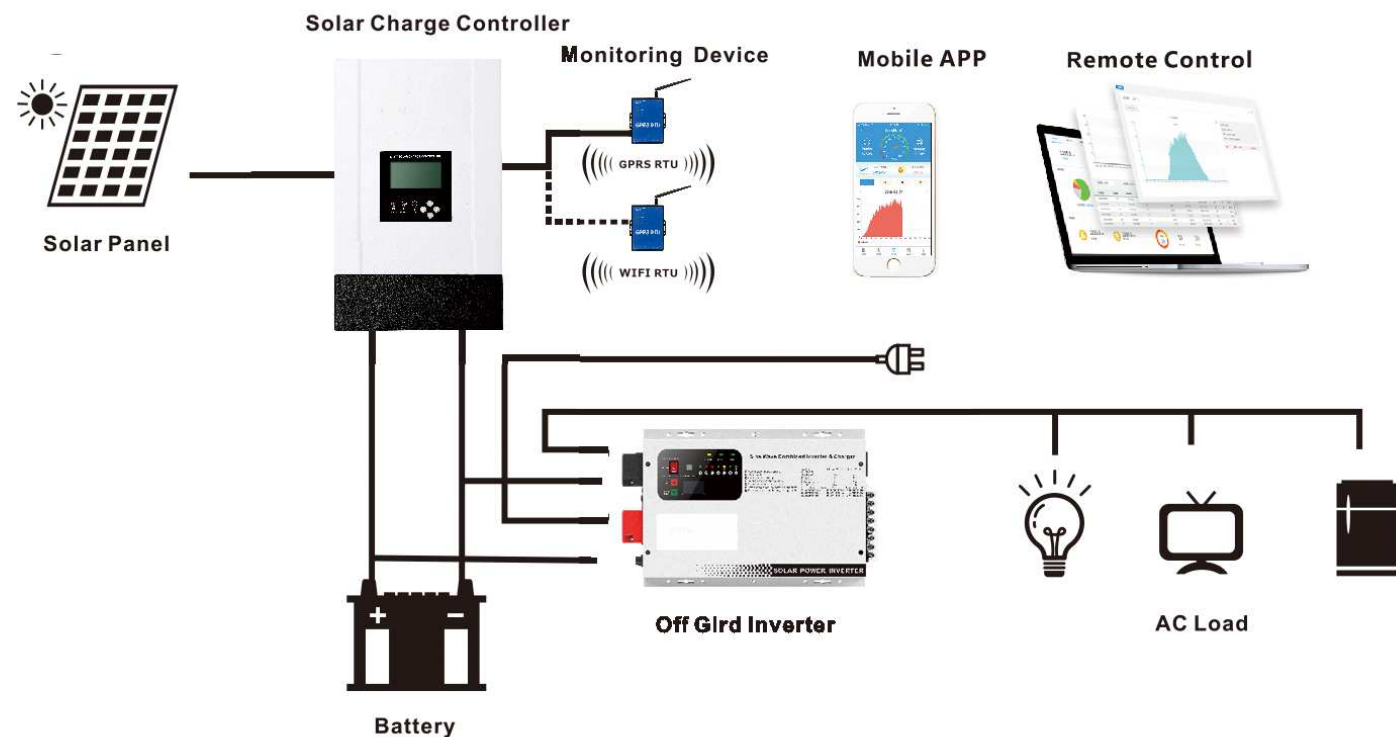

## SPECIFICATIONS

Model	SCH-30A	SCH-40A	SCH-50A	SCH-60A	SCH-70A	SCH-80A	SCH-90A	SCH-100A
Solar System Voltage	12V/24V/36V/48V Auto work							
<b>Electrical</b>								
PV Operating Voltage	18~150Vdc@12V 35~150Vdc@24V 50~150Vdc@36V 65~150Vdc@48V							
Max. PV Input Power	12V 400W	12V 600W	12V 700W	12V 900W	12V 1000W	12V 1200W	12V 1300W	12V 1400W
	24V 800W	24V 1200W	24V 1400W	24V 1800W	24V 2000W	24V 2300W	24V 2600W	24V 2800W
	36V 1300W	36V 1700W	36V 2200W	36V 2600W	36V 3000W	36V 3300W	36V 3800W	36V 4200W
	48V 1700W	48V 2300W	48V 2900W	48V 3400W	48V 4000W	48V 4600W	48V 5000W	48V 5400W
Rated Output Current	30A	40A	50A	60A	70A	80A	90A	100A
Rated DC Load Current	40A		60A					
Self Consumption	<2W		<3W					
Max. Conversion Efficiency	97.5%		98.5%					
Protection	PV array short circuit, over charging, battery reverse polarity, output short circuit							
<b>Battery Charging</b>								
Battery Type	Sealed Gel AGM Flooded Lithium							
Charge Algorithm	3 stage: Bulk, Absorption, Float charging			4 stage: Bulk, Absorption, Float, Equalize charging				
Bulk Charge Voltage	Sealed: 14.4V AGM 14.2V Gel: 14.2V Flooded: 14.6V User defined: 10-15V							
Float Charge Voltage	Sealed/Gel/AGM: 13.8V Flooded: 13.7V User defined: 10-15V							
Equalize Charge Voltage	N/A		Sealed: 14.6V AGM: 14.8V Flooded: 14.9V					
Load Disconnect Voltage	9V-12V Adjustable							
Load reconnect voltage	Disconnect voltage +2V							
Temperature Compensation	5mV/°C/2V with BTS							
<b>Communication</b>								
Communication Port	Rs485 with On line monitoring system							
<b>Physical</b>								
Net Weight	3.3kg	3.3kg	6.5kg	6.5kg	7.8kg	7.8kg	9.0kg	9.0kg
Gross Weight	4.0kg	4.0kg	7.3kg	7.3kg	8.7kg	8.7kg	10kg	10kg
Dimension(mm)	220*170*90		310*230*110		370*230*110		405*230*110	
Cooling	Heatsink cooling							
Enclosure	IP 45							
<b>Environment</b>								
Ambient Operating Temperature	-25°C ~60°C							
Storage Temperature	-40°C ~80°C							
Humidity	5%-95% non-condensing							
Warranty	Two years							

※Technical data for 12V system at 25°C, twice in 24V system rate, triple in 36V System rate and quadruple in 48V system rate.