



Welcome to Hudson



Hudson Electric (Wuxi) Co.,Ltd, is located in Wuxi, Jiangsu, a city with the reputation of “ the pear of Taihu lake”.(150km to Shanghai), established in 2016. Hudson is a technology-based venture enterprise which includes the research and development, manufacturing, sales and professional service. The company now has a leading high-level technical R&D team, half of who have been in the fuse field for many years. Hudson has a number of core-technology patents. 100% products held CE certificates and core products has passed the US UL safety certificates. At the same time, Hudson already got the quality certificate of IATF16949, and has a sound production management system to provide customers with quality products and service. Hudson, with passion, wisdom and experience, is becoming an influential and creative company in the industry.

Hudson core technologies—Fuse Field

The ability to provide reliable protection solutions for power and energy storage systems, propulsion and traction systems of Electricity Power , conversion and control systems of Power Electronics, Graphene power applications and solar cell array system ect.

Products Applications

Electric Vehicles, Two-wheeled &Three wheeled electric motorcycles and bicycles, Automated Guided Vehicles, Railway and Metro system, Aerospace Devices, Civil ships and Military ships, Energy Storage System, Power Electronics system of Industrial automation equipment and Industrial communications Equipment such as satellites and radars ect..

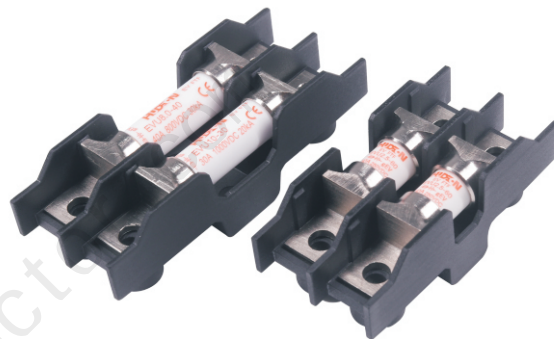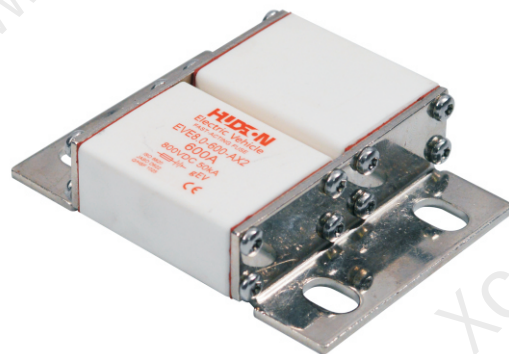

Product Introduction

The Hudson EV series fuses are specially developed for the reliable protection of power batteries and battery management systems, motor drives, converters, and vehicle circuits for new energy vehicles such as electric vehicles, electric heavy trucks and electric buses. It can withstand current shocks, mechanical shocks such as temperature shock, shifting and braking, and meets the requirements of ISO 8820 / JASO D622 / Q/HSF 907.

Technical Parameters:

Rated voltage: 150-1450VDC
 Rated current: 10-1000A
 Breaking capacity: 100kA

Typical Application:

- Electric vehicles
- Power and energy storage batteries
- IGBTs and other semiconductor devices
- PDU (DC/DC converter, etc.)
- Compressors, motor drives, etc.

Contents 目录

1

Electric Vehicle Application

P01-14

150VDC, 10-1000A	01-02
250VDC, 10-1000A	03-04
500VDC, 10-800A	05-06
800VDC, 10-600A	07-08
1000VDC, 10-800A	09-12
1200VDC, 10-1000A	13-14

2

Charging System Application

P15-18

800VDC, 100-600A	15-18
950VDC, 100-1000A	15-18
1450VDC, 100-800A	15-18

3

Fuse-base(Fuse-mount)

P19-21


250-800VDC	19
250-1000VDC	20
1000VDC	21

FTF, 150VDC, Amps: 10-1000A




Dimensions(mm)

EVU1.5-□ Amps: 10-60A

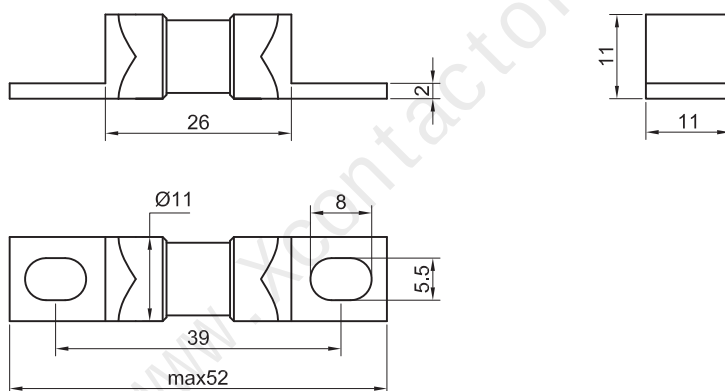

EVU1.5-□-□ Amps: 50-1000A

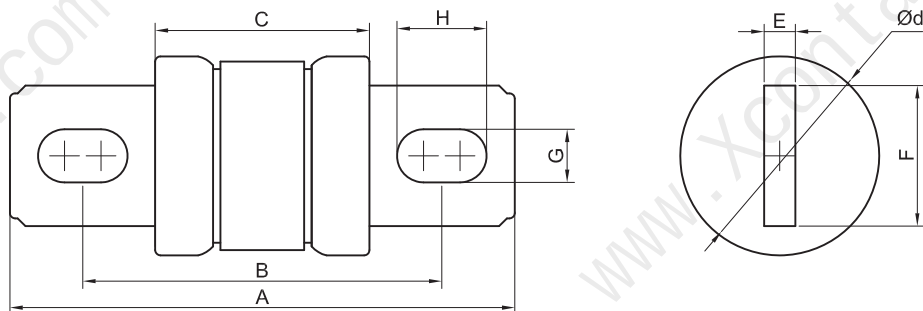



Ref.	电流范围	A	B	C	Ød	E	F	G×H
EVU1.5-□-A	50-400	66	46	28	26	3	19	8X13
EVU1.5-□-B	300-600	72	50	29	31	4	24	8X13
EVU1.5-□-C	500-1000	87	56	29	38	6	27	10X17

FTF,150VDC, Amps:10-1000A

Electrical Specifications

产品型号 Product number	额定电流 Amps	分断能力 Breaking Capacity	焦耳积分 Pre-arcing	$I^2t(A^2s)$ Total clear	功率损耗 Watts loss 100%In
EVU1.5-10	10	20kA @150VDC L/R=10ms	10	29	0.8
EVU1.5-20	20		41	114	1.7
EVU1.5-30	30		92	257	2.7
EVU1.5-40	40		163	457	3.2
EVU1.5-50	50		255	714	3.7
EVU1.5-60	60		367	1029	4.2
EVU1.5-50-A	50		204	571	2.8
EVU1.5-60-A	60		294	823	3.4
EVU1.5-80-A	80		653	1829	4.4
EVU1.5-100-A	100		1020	2857	5.6
EVU1.5-150-A	150	25kA @150VDC L/R=10ms	2296	6429	9.0
EVU1.5-200-A	200		4082	11429	12.5
EVU1.5-250-A	250		6378	17857	16.0
EVU1.5-300-A	300		9184	25714	20.8
EVU1.5-400-A	400		16327	45714	28.2
EVU1.5-300-B	300		7347	20571	18.0
EVU1.5-400-B	400		13061	36571	23.8
EVU1.5-450-B	450		16531	46286	29.0
EVU1.5-500-B	500		25510	71429	37.0
EVU1.5-600-B	600		36735	102857	48.0
EVU1.5-500-C	500		20408	57143	34.0
EVU1.5-600-C	600		29388	82286	44.0
EVU1.5-700-C	700		50000	140000	56.0
EVU1.5-800-C	800		65306	182857	70.0
EVU1.5-1000-C	1000		102041	285714	91.0

Time-Current Characteristics

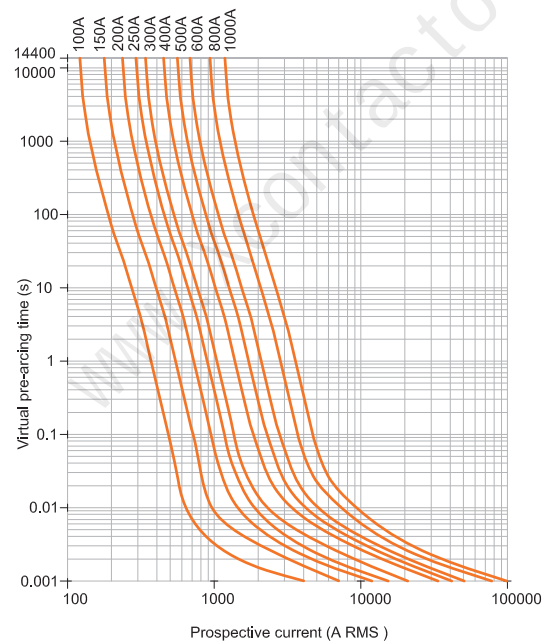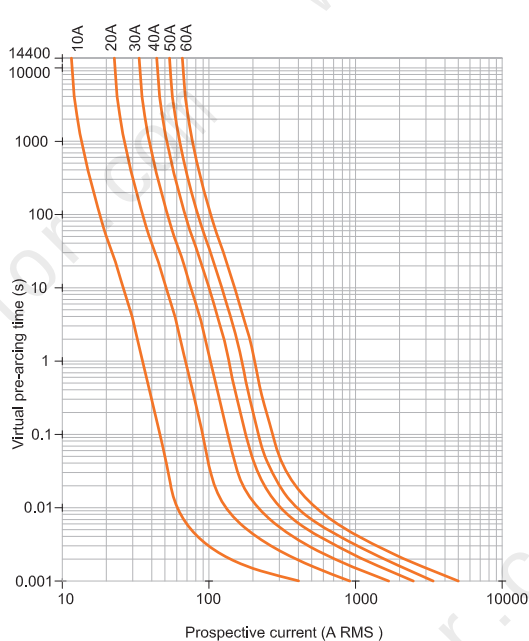


FTF,250VDC, Amps:10-1000A




Dimensions(mm)

EVU2.5-□ Amps: 10-60A

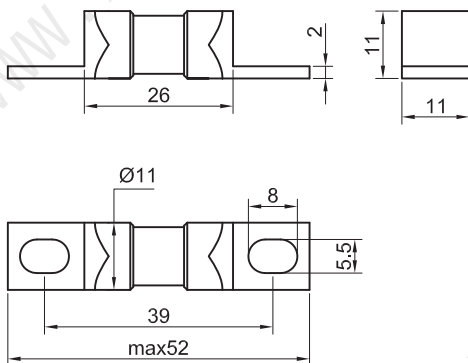


EVU2.5-□-□

Amps: 50-600A

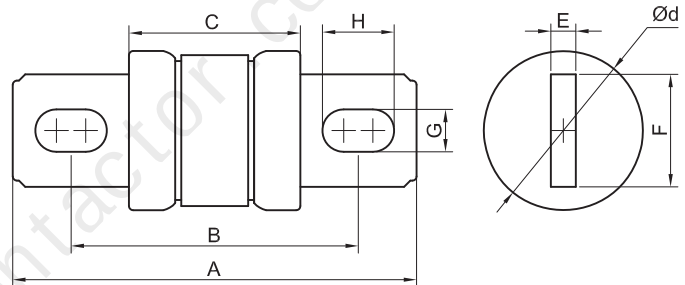

Ref.	电流范围	A	B	C	Ød	E	F	G×H
EVU2.5-□-A	50-200	66	46	28	26	3	19	8X13
EVU2.5-□-B	250-400	72	50	29	31	4	24	8X13
EVU2.5-□-C	450-600	87	56	29	38	6	27	10X17


EVE2.5-□-A Amps: 100-500A

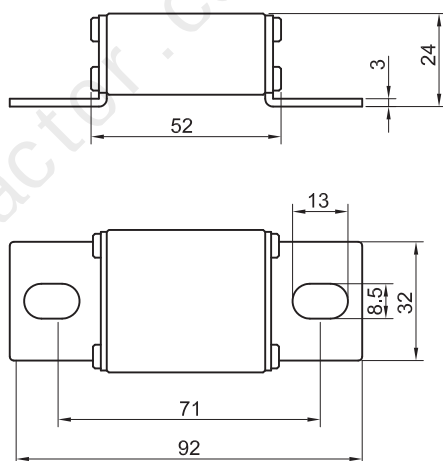

EVE2.5-□-AX2

Amps: 600-1000A



未注尺寸同 EVE2.5-□-A

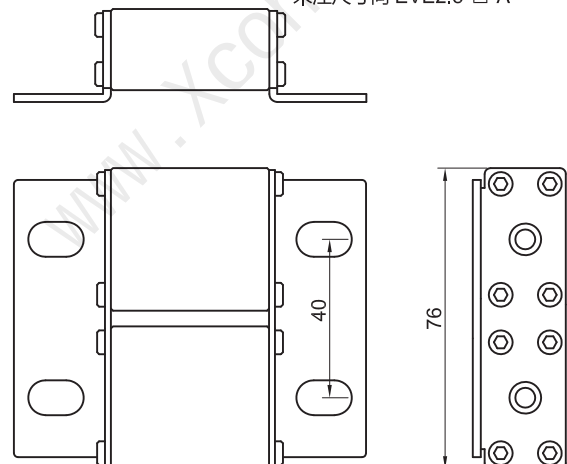

FTF,250VDC, Amps:10-1000A

Electrical Specifications

产品型号 Product number	额定电流 Amps	分断能力 Breaking Capacity	焦耳积分 Pre-arcing	$I^2t(A^2s)$ Total clear	功率损耗 Watts loss 100%/ln
EVU2.5-10	10	30kA @250VDC L/R=8ms	11	37	1.0
EVU2.5-20	20		46	147	1.8
EVU2.5-30	30		103	331	2.4
EVU2.5-40	40		184	588	3.1
EVU2.5-50	50		287	918	3.8
EVU2.5-60	60		413	1322	4.8
EVU2.5-50-A	50	25kA @250VDC L/R=10ms	232	744	3.4
EVU2.5-60-A	60		335	1071	4.4
EVU2.5-80-A	80		595	1904	5.6
EVU2.5-100-A	100		1148	3673	9.0
EVU2.5-150-A	150		2583	8264	12.5
EVU2.5-200-A	200		4591	14692	18.0
EVU2.5-250-B	250		7174	22957	23.8
EVU2.5-300-B	300		10331	33058	29.0
EVU2.5-400-B	400		18365	58770	37.0
EVU2.5-450-C	450		23244	74380	48.0
EVU2.5-500-C	500	25kA @250VDC L/R=10ms	28269	91827	59.0
EVU2.5-600-C	600		41322	132231	70.2
EVE2.5-100-A	100		1148	3673	8.5
EVE2.5-150-A	150		2583	8264	10.2
EVE2.5-200-A	200		4591	14692	15.7
EVE2.5-250-A	250		7174	22957	21.4
EVE2.5-300-A	300		10331	33058	28.4
EVE2.5-400-A	400		18365	58770	34.9
EVE2.5-500-A	500		28696	91827	57.0
EVE2.5-600-AX2	600		35950	115041	65.0
EVE2.5-800-AX2	800		63912	204518	90.6
EVE2.5-1000-AX2	1000		99862	319559	116.2

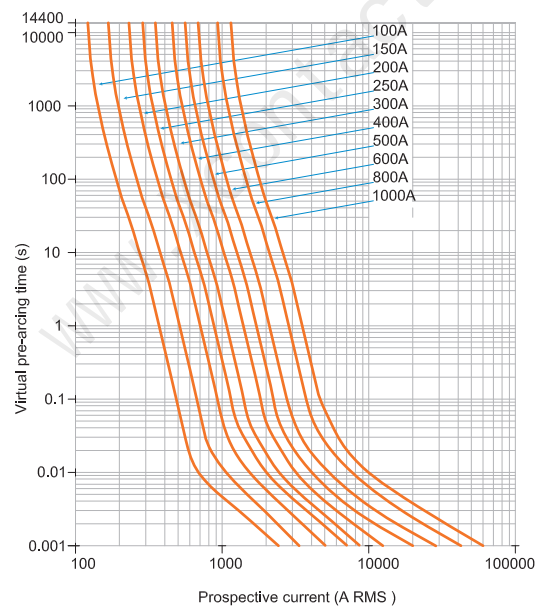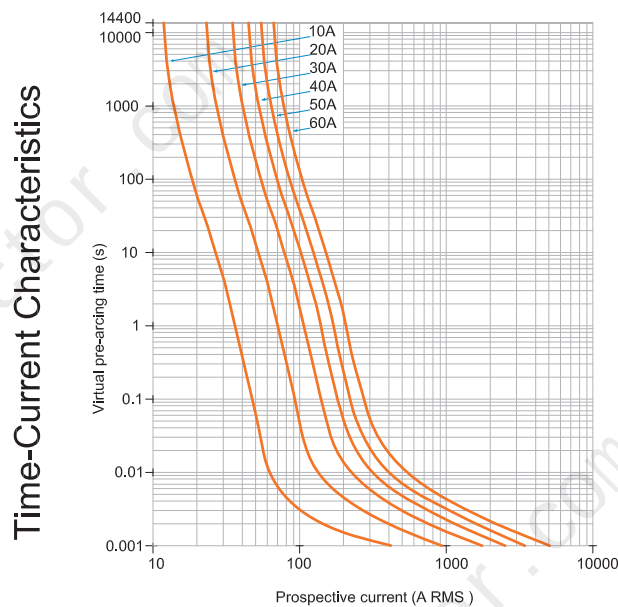


FTF,500VDC, Amps:10-800A




Dimensions(mm)


EVU5.0-□ Amps: 10-60A

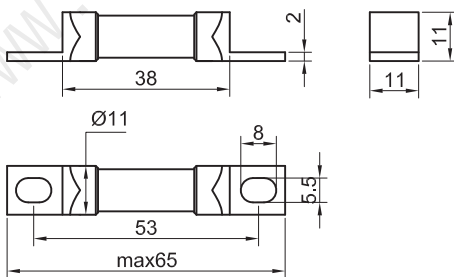

EVU5.0-□-□ Amps: 50-800A

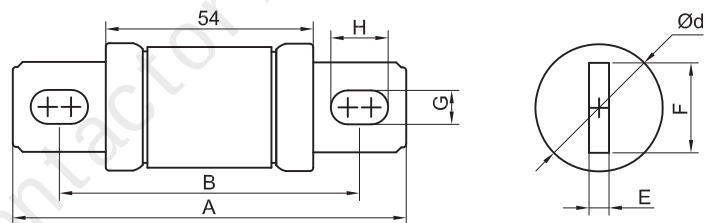


EVE5.0-□-AP Amps: 150-500A

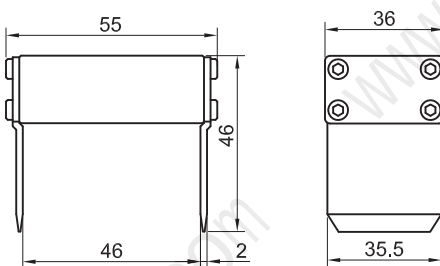

Ref.	电流范围	A	B	Ød	E	F	G×H
EVU5.0-□-A	80-200	92	72	26	3	19	8X13
EVU5.0-□-B	250-400	97	75	31	4	24	8X13
EVU5.0-□-C	450-500	110	81	38	6	27	10X17
EVU5.0-□-D	600-800	110	81	51	6	39	10X17


EVE5.0-□-A Amps: 100-500A

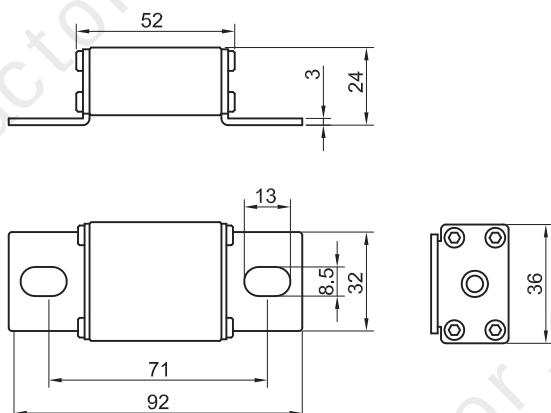

EVE5.0-□-AX2

Amps: 600-800A



未注尺寸同EVE5.0-□-A

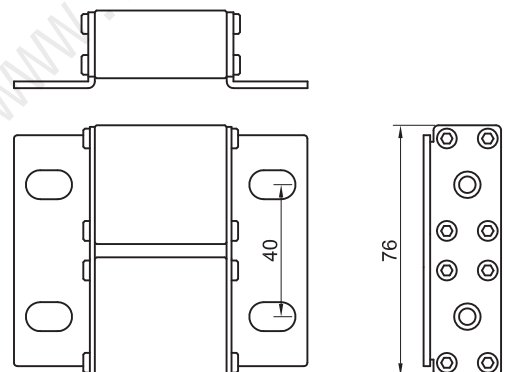

FTF,500VDC, Amps:10-800A

Electrical Specifications

产品型号 Product number	额定电流 Amps	分断能力 Breaking Capacity	焦耳积分 Pre-arcing	$I^2t(A^2s)$ Total clear	功率损耗 Watts loss 100%In
EVU5.0-10	10	25kA @500VDC L/R=10ms	14	54	1.2
EVU5.0-20	20		56	214	2.0
EVU5.0-30	30		127	482	2.8
EVU5.0-40	40		225	856	3.4
EVU5.0-50	50		352	1338	4.0
EVU5.0-60	60		507	1926	4.4
EVU5.0-80-A	80	50kA @500VDC L/R=10ms	819	3113	5.8
EVU5.0-100-A	100		1280	4864	9.2
EVU5.0-150-A	150		2880	10944	16.3
EVU5.0-200-A	200		5120	19456	24.4
EVU5.0-250-B	250		8000	30400	36.0
EVU5.0-300-B	300		11520	43776	48.0
EVU5.0-400-B	400	50kA @500VDC L/R=10ms	20480	77824	62.0
EVU5.0-450-C	450		25920	98496	70.0
EVU5.0-500-C	500		32000	121600	79.0
EVU5.0-600-D	600		46080	175104	90.0
EVU5.0-800-D	800		81920	311296	103.0
EVE5.0-100-A	100	50kA @500VDC L/R=10ms	1216	4621	9.2
EVE5.0-200-A	200		4864	18483	16.3
EVE5.0-300-A	300		10944	41587	48.0
EVE5.0-400-A	400		19456	73933	62.0
EVE5.0-500-A	500		30400	115520	79.0
EVE5.0-600-AX2	600		32256	122573	86.0
EVE5.0-800-AX2	800	50kA @500VDC L/R=10ms	57344	217907	100.0
EVE5.0-150-AP	150		2736	10397	16.3
EVE5.0-200-AP	200		4864	18483	24.4
EVE5.0-250-AP	250		7600	28880	36.0
EVE5.0-300-AP	300		10944	41587	48.0
EVE5.0-350-AP	350		14896	56605	54.0
EVE5.0-400-AP	400		19456	73933	62.0

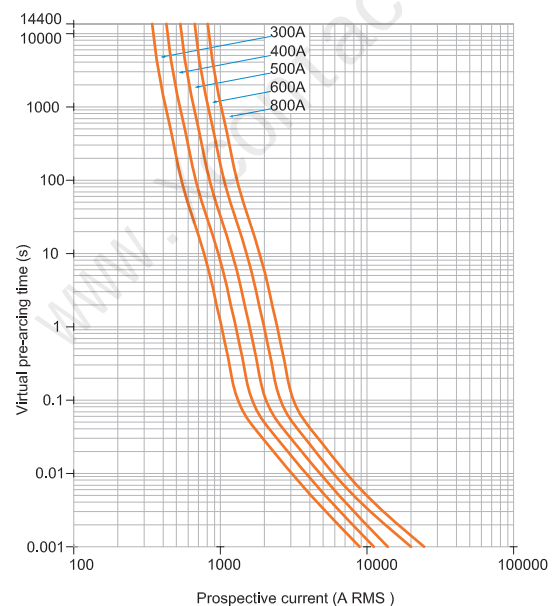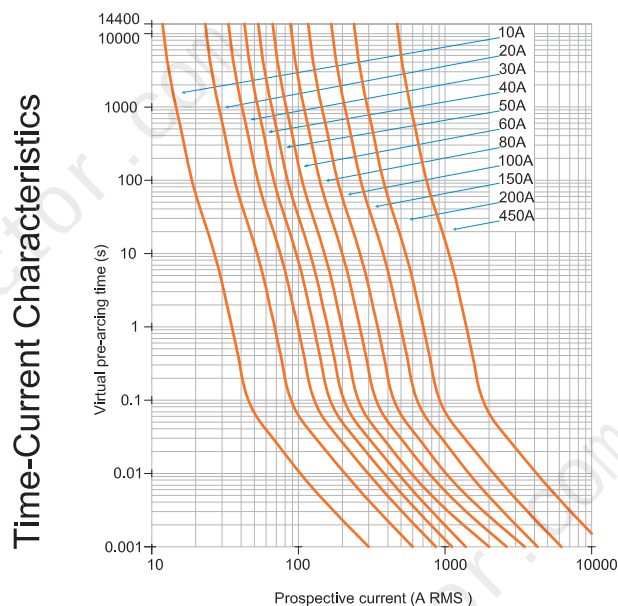


FTF,800VDC, Amps:10-600A




Dimensions(mm)


EVU8.0-□ Amps: 10-50A

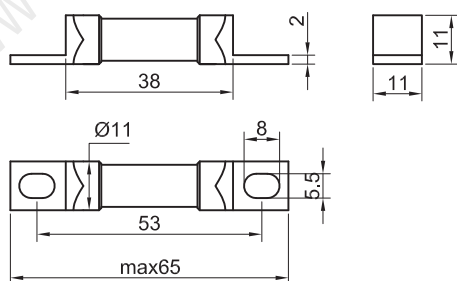

EVU8.0-□-□ Amps: 100-600A


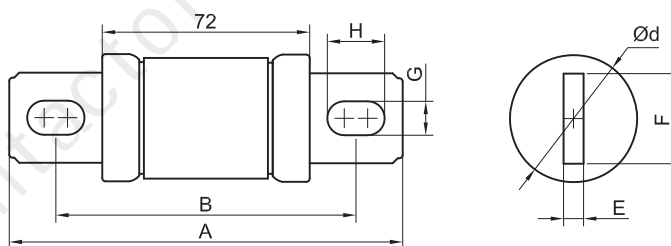


EVE8.0-□-AP Amps: 150-400A

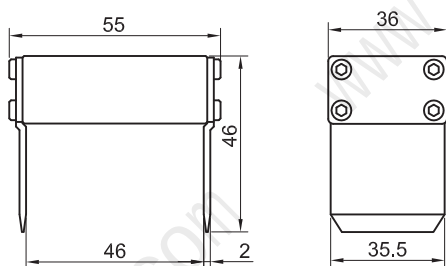


Ref.	电流范围	A	B	Ød	E	F	G×H
EVU8.0-□-B	100-400	97	75	31	4	24	8X13
EVU8.0-□-C	350-450	110	81	38	6	27	10X17
EVU8.0-□-D	500-600	110	81	51	6	39	10X17

EVE8.0-□-A Amps: 100-400A

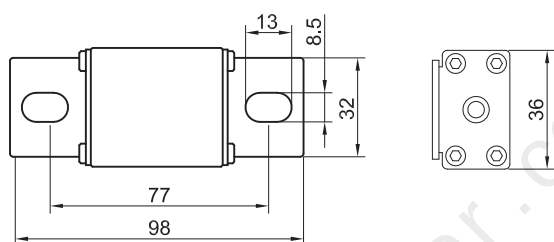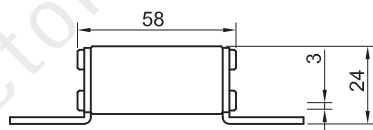

EVE8.0-□-AX2 Amps: 500-600A



未注尺寸同EVE8.0-□-A

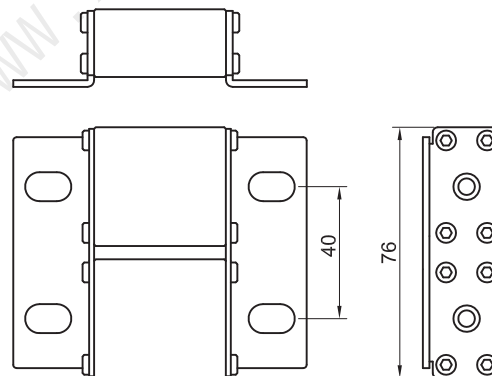

FTF,800VDC, Amps:10-600A

Electrical Specifications




产品型号 Product number	额定电流 Amps	分断能力 Breaking Capacity	焦耳积分 Pre-arcing	$I^2t(A^2s)$ Total clear	功率损耗 Watts loss 100%In
EVU8.0-10	10	30kA @800VDC L/R=10ms	14	59	2.0
EVU8.0-20	20		58	236	2.8
EVU8.0-30	30		130	531	3.6
EVU8.0-40	40		230	945	4.8
EVU8.0-50	50		360	1476	6.0
EVU8.0-100-B	100	60kA @800VDC L/R=10ms	1309	5368	11.0
EVU8.0-150-B	150		2946	12077	18.8
EVU8.0-200-B	200		5237	21470	27.0
EVU8.0-250-B	250		8182	33547	38.8
EVU8.0-300-B	300		11782	48308	45.0
EVU8.0-350-B	350		16037	65753	50.0
EVU8.0-400-B	400		20947	85881	60.0
EVU8.0-350-C	350		14433	59177	46.2
EVU8.0-400-C	400		18852	77293	56.0
EVU8.0-450-C	450		26511	108693	68.0
EVU8.0-500-D	500		32729	134189	69.0
EVU8.0-600-D	600		47130	193232	82.0
EVE8.0-100-A	100	50kA @800VDC L/R=10ms	1309	5368	11.0
EVE8.0-200-A	200		5237	21470	27.0
EVE8.0-300-A	300		11782	48308	45.0
EVE8.0-400-A	400		20947	85881	60.0
EVE8.0-500-AX2	500		26183	107351	65.0
EVE8.0-600-AX2	600	50kA @800VDC L/R=10ms	37704	154586	78.0
EVE8.0-150-AP	150		2946	12077	18.8
EVE8.0-200-AP	200		5237	21470	27.0
EVE8.0-250-AP	300		8182	33547	38.8
EVE8.0-350-AP	350		16037	65753	50.0
EVE8.0-400-AP	400		20947	85881	60.0

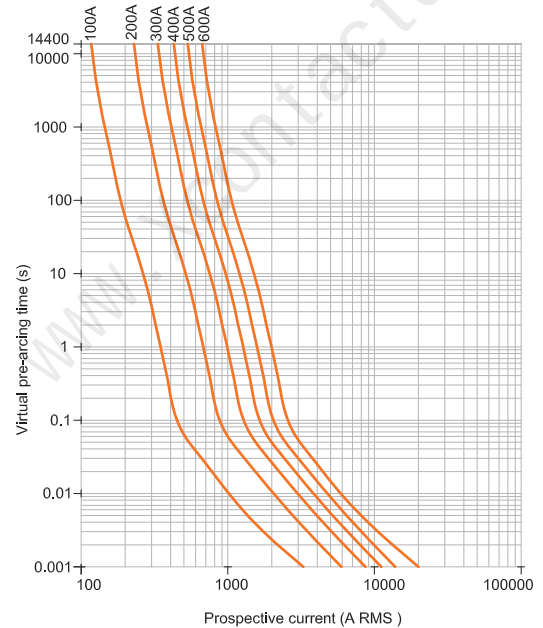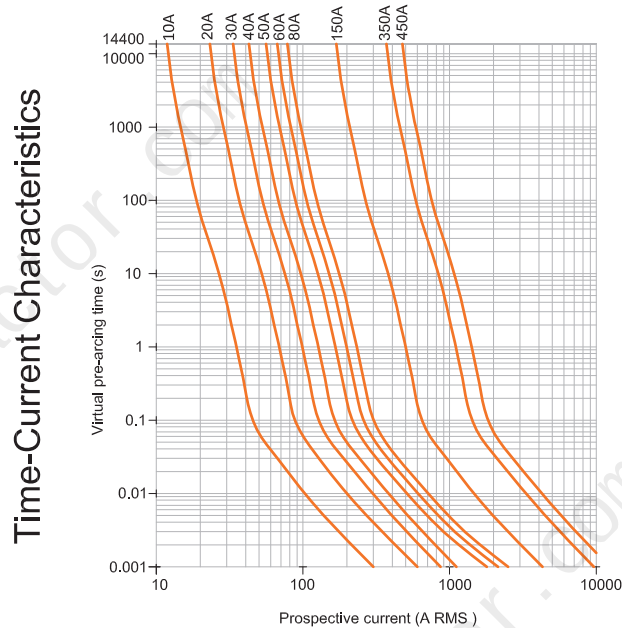

FTF,1000VDC, Amps:10-800A





Dimensions(mm)

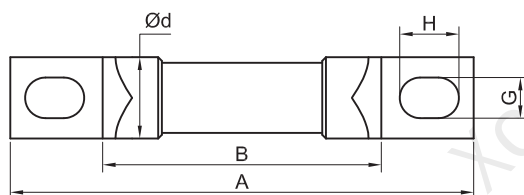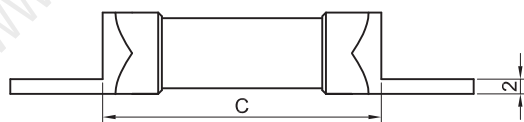

EVU10-□

Amps: 10-100A

Ref.	电流范围	A	B	C	Ød	D	G×H
EVU10-□	10-30	65	53	38	11	11	5.5×8
EVU10-□	40-100	77	63	45	19	19	7×9

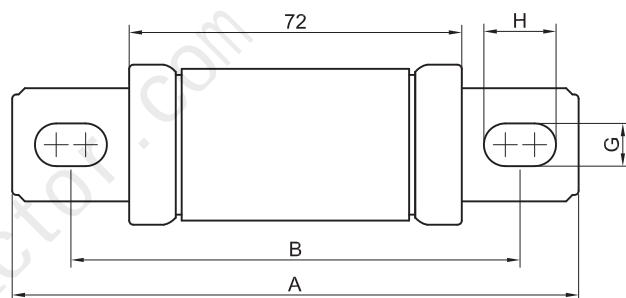


EVU10-□-□

Amps: 100-600A


Ref.	电流范围	A	B	Ød	E	F	G×H
EVU10-□-B	100-200	115	95	31	4	24	8×13
EVU10-□-C	225-400	129	99	38	6	27	10×17
EVU10-□-D	450-600	129	99	51	6	40	10×17

FTF, 1000VDC, Amps: 10-800A

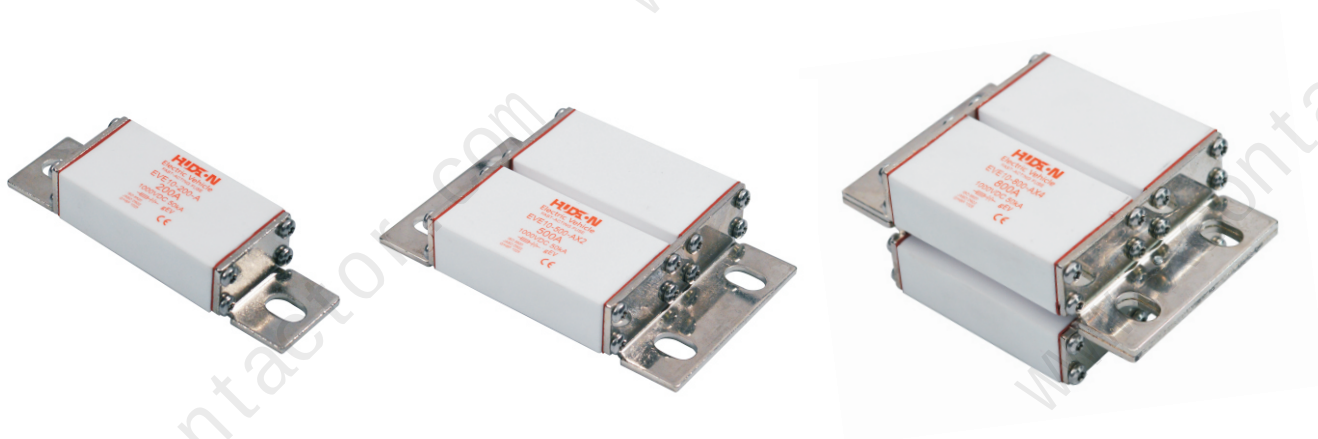


Dimensions(mm)


EVE10-□-A Amps: 100-300A

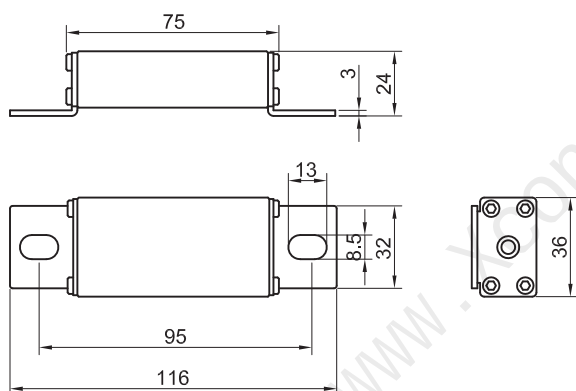


EVE10-□-AX2 Amps: 200-500A
未注尺寸同 EVE10-□-A

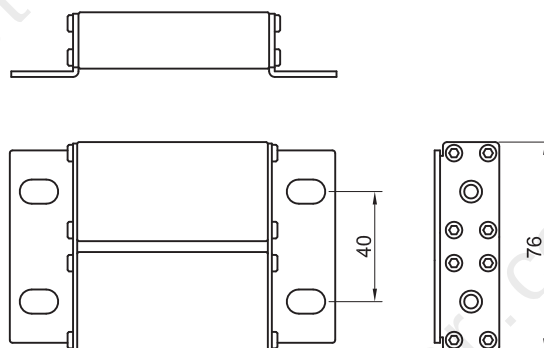

EVE10-□-AX4 Amps: 600-800A
未注尺寸同 EVE10-□-A

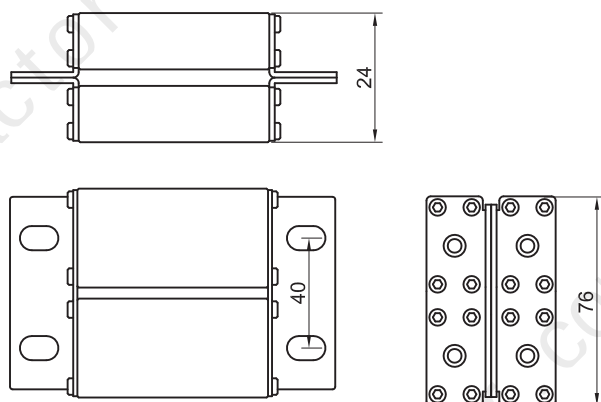

EVE10-□-AP Amps: 100-300A

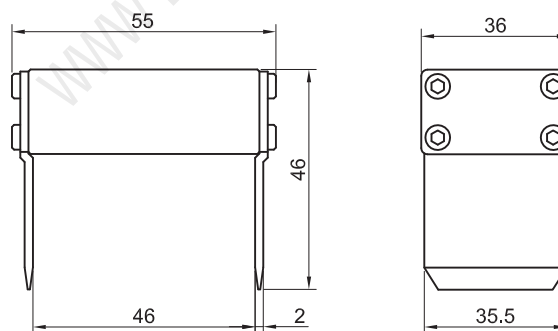





FTF,1000VDC, Amps:10-800A

Electrical Specifications

产品型号 Product number	额定电流 Amps	分断能力 Breaking Capacity	焦耳积分 Pre-arcing	$I^2t(A^2s)$ Total clear	功率损耗 Watts loss 100%In
EVU10-10	10	20kA @1000VDC L/R=10ms	16	69	0.8
EVU10-20	20		61	275	1.7
EVU10-30	30		138	619	4.0
EVU10-40	40		244	1100	4.6
EVU10-50	50		382	1719	5.2
EVU10-60	60		550	2475	6.0
EVU10-70	70		749	3369	7.3
EVU10-80	80		978	4400	9.8
EVU10-90	90		1238	5569	12.4
EVU10-100	100		1528	6875	13.2
EVU10-100-B	100	50kA @1000VDC L/R=10ms	1389	6250	11.5
EVU10-125-B	125		2170	9766	16.3
EVU10-150-B	150		3125	14063	18.8
EVU10-175-B	175		4253	19141	22.3
EVU10-200-B	200		5556	25000	27.5
EVU10-225-C	225		7031	31641	29.0
EVU10-250-C	250		8681	39063	40.0
EVU10-300-C	300		12500	56250	46.3
EVU10-350-C	350		17014	76563	53.8
EVU10-400-C	400		22222	100000	62.5
EVU10-450-D	450	50kA @1000VDC L/R=10ms	28125	126563	65.0
EVU10-500-D	500		34722	156250	72.5
EVU10-600-D	600		50000	225000	85.0
EVE10-100-A	100		1389	6250	11.5
EVE10-150-A	150		3125	14063	18.8
EVE10-200-A	200		5556	25000	27.5
EVE10-250-A	250		8681	39063	40.0
EVE10-300-A	300		12500	56250	46.3
EVE10-200-AX2	200		4889	22000	24.3
EVE10-250-AX2	250		7639	34375	36.8
EVE10-300-AX2	300	50kA @1000VDC L/R=10ms	11000	49500	42.0
EVE10-350-AX2	350		14972	67375	49.0
EVE10-400-AX2	400		19556	88000	58.0
EVE10-500-AX2	500		30556	137500	66.0
EVE10-600-AX4	600		42500	191250	77.0
EVE10-700-AX4	700		57847	260313	85.0
EVE10-800-AX4	800		75556	340000	93.0
EVE10-100-AP	100		1389	6250	11.5
EVE10-125-AP	125		2170	9766	16.3
EVE10-150-AP	150		3125	14063	18.8
EVE10-175-AP	175		4253	19141	22.3
EVE10-200-AP	200	50kA @1000VDC L/R=10ms	5556	25000	27.5
EVE10-250-AP	250		8681	39063	40.0
EVE10-300-AP	300		12500	56250	46.3

FTF, 1000VDC, Amps: 10-800A







Time-Current Characteristics

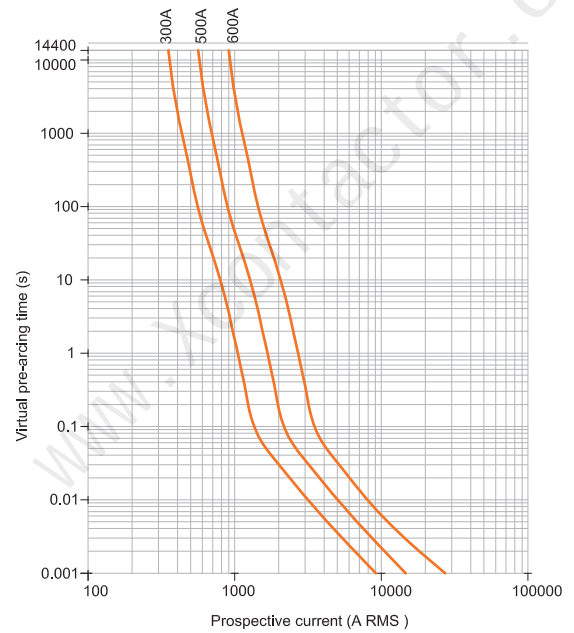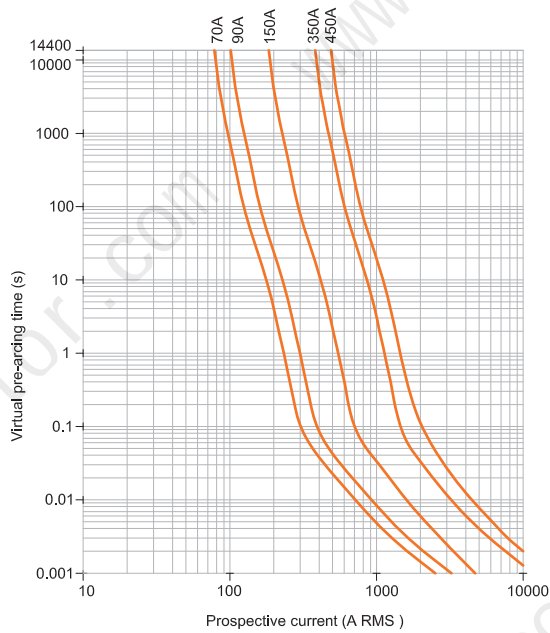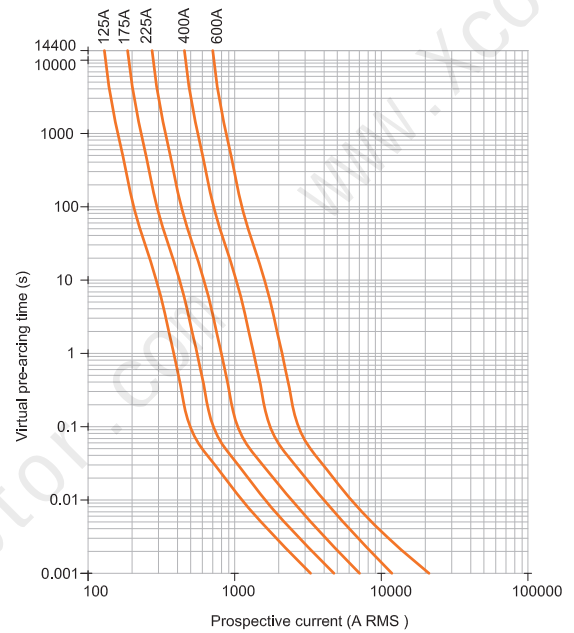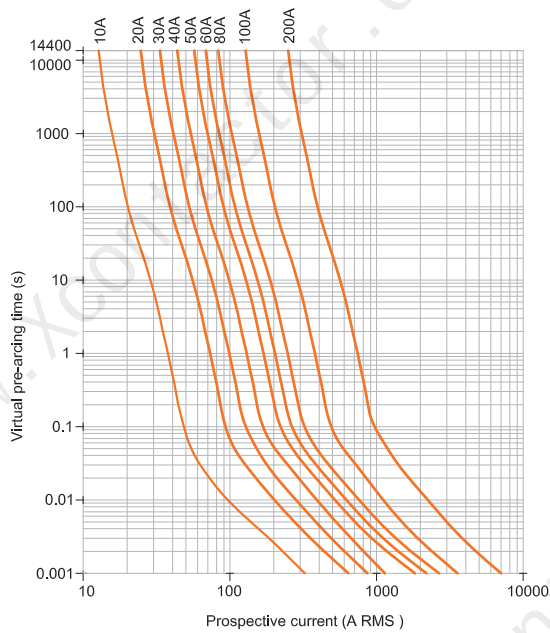

FTF, 1200VDC, Amps: 10-1000A



Dimensions(mm)

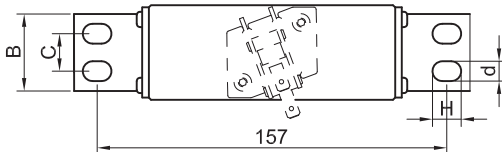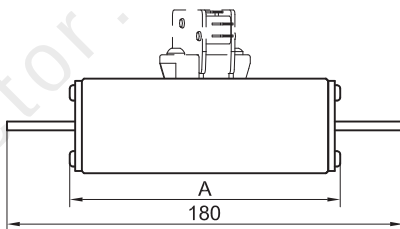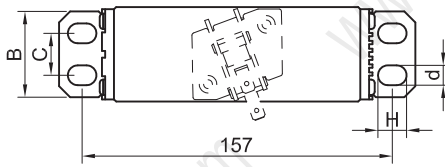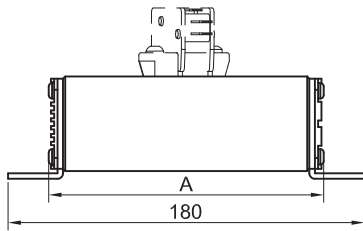


L Type Amps: 100-1000A

Ref.	A	B	C	D	d×H
EVE12-□-AL	132	38	0	40	8X13
EVE12-□-BL	130	46	0	48	10X13
EVE12-□-CL	130	55	28	58	8X13
EVE12-□-DL	130	70	40	74	10X13

M Type Amps: 100-1000A

Ref.	A	B	C	D	d×H
EVE12-□-AM	126	20	0	40	8X13
EVE12-□-BM	124	25	0	48	10X13
EVE12-□-CM	124	30	0	58	10X13
EVE12-□-DM	124	50	25	74	10X13

FTF,1200VDC, Amps:10-1000A

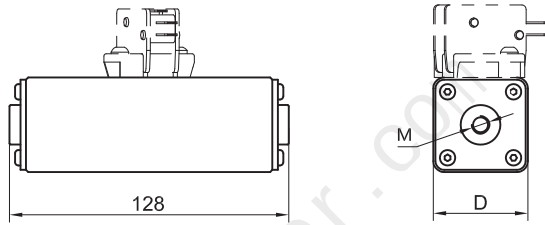



F Type Amps: 100-1000A

Ref.	D	M
EVE12-□-AF	40	M8
EVE12-□-BF	48	M8
EVE12-□-CF	58	M12
EVE12-□-DF	74	M12

Electrical Specifications

产品型号 Product number	额定电流 Amps	分断能力 Breaking Capacity	焦耳积分 Pre-arcing	$I^2t(A^2s)$ Total clear	功率损耗 Watts loss 100%In
EVE12-100-AL(F/M)	100	100kA @1200VDC L/R=20ms	1486	6688	20.0
EVE12-125-AL(F/M)	125		2322	10451	30.0
EVE12-150-AL(F/M)	150		3344	15049	39.0
EVE12-175-AL(F/M)	175		4552	20483	48.0
EVE12-200-AL(F/M)	200		5945	26754	56.0
EVE12-250-AL(F/M)	250		9290	41803	64.0
EVE12-300-AL(F/M)	300		13377	60196	77.0
EVE12-350-BL(F/M)	350		18207	81934	89.0
EVE12-400-BL(F/M)	400		23781	107015	97.0
EVE12-450-BL(F/M)	450		30098	135441	110.0
EVE12-500-CL(F/M)	500		37158	167212	118.0
EVE12-600-CL(F/M)	600		53508	240785	130.0
EVE12-700-CL(F/M)	700		72830	327735	142.0
EVE12-800-DL(F/M)	800		95125	428062	156.0
EVE12-900-DL(F/M)	900		120392	541766	168.0
EVE12-1000-DL(F/M)	1000		148633	668847	180.0

Time-Current Characteristics

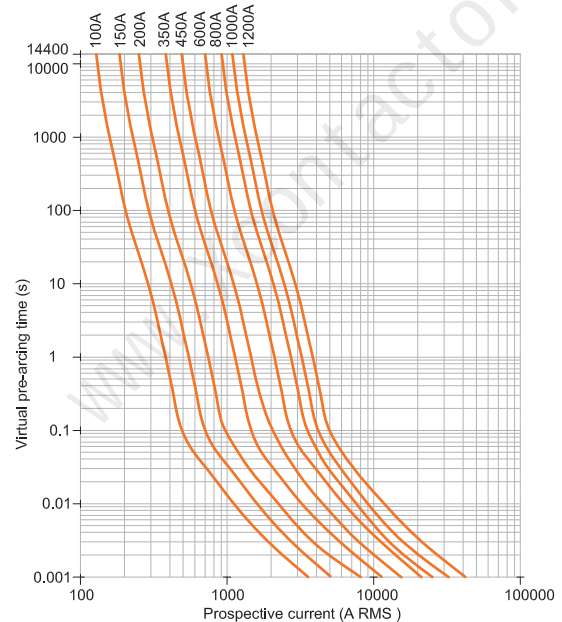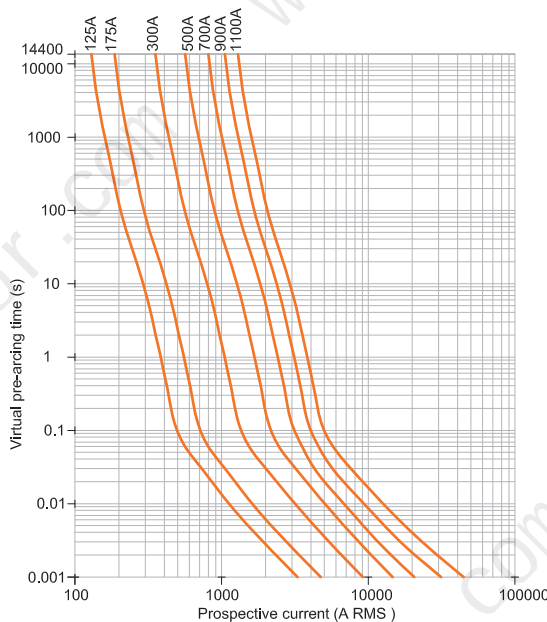

FTF,800VDC, Amps:100-600A

FTF,950VDC, Amps:100-1000A

FTF,1450VDC, Amps:100-800A



Product Description

赫森URSU/URSE系列熔断器是为保护充电系统特别设计的。可选额定电压：800VDC、950VDC、1450VDC。额定电流范围100-1000A。分断能力最高可达100kA。可根据要求携带微动开关或者信号指示器。

应用领域：一充电桩（充电站）

一充换电站

The URSU/URSE series fuses are specially designed to protect the charging system. Optional rated voltage: 800VDC, 950VDC, 1450VDC. The rated current range is 100-1000A. The breaking capacity is up to 100kA. A micro switch or signal indicator can be carried on request.

Application areas: - charging pile (charging station)
- charging and replacing power station

Technical data

■ Rated Voltage

- 800-1450VDC

■ Rated Current

- 100-1000A

■ Breaking Capacity


- 60-100kA

FTF,800VDC, Amps:100-600A

FTF,950VDC, Amps:100-1000A


FTF,1450VDC, Amps:100-800A

Dimensions(mm)

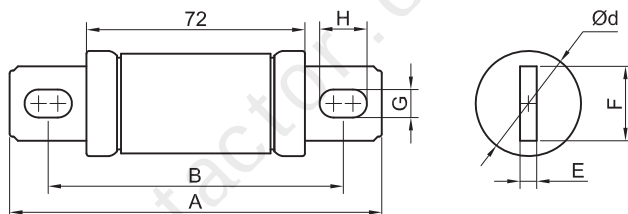


URSU8-□-□

Ref.	电流范围	A	B	Ød	E	F	G×H
URSU8-□-B	100-400	115	95	31	4	24	8X13
URSU8-□-C	200-600	129	99	38	6	27	10X17

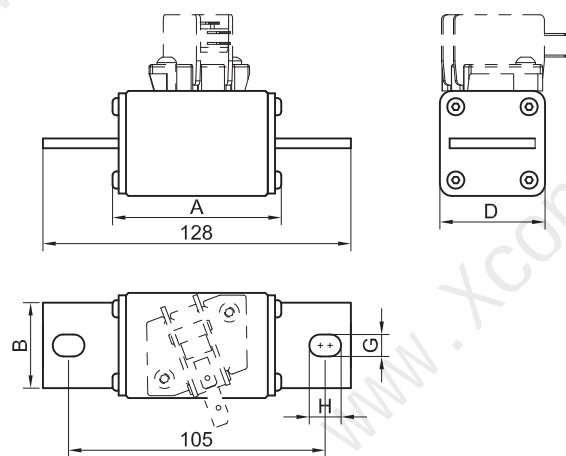

URSE9.5-□-□

Ref.	电流范围	A	B	E	G×H
URSE9.5-□-AM	100-400	74	20	40	8X13
URSE9.5-□-BM	300-600	72	25	48	10X13
URSE9.5-□-CM	500-1000	72	30	58	10X13

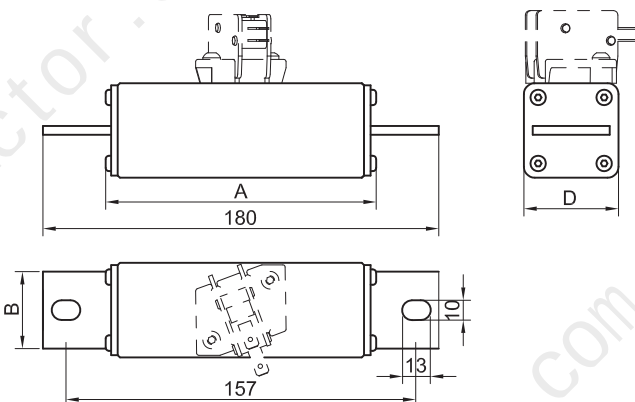

URSE14.5-□-□

Ref.	电流范围	A	B	E
URSE14.5-□-BM	100-300	124	25	48
URSE14.5-□-CM	400-800	124	30	58

FTF,800VDC, Amps:100-600A

FTF,950VDC, Amps:100-1000A

FTF,1450VDC, Amps:100-800A

Electrical Specifications


产品型号 Product number	额定电流 Amps	分断能力 Breaking Capacity	焦耳积分 Pre-arcing	$I^2t(A^2s)$ Total clear	功率损耗 Watts loss 100%In
URS08-100-B	100	60kA @800VDC L/R=10ms	1221	3765	12.0
URS08-150-B	150		3014	9323	19.0
URS08-200-B	200		5298	16654	27.0
URS08-250-B	250		8933	26799	38.8
URS08-300-B	300		12556	37956	45.0
URS08-350-B	350		17876	52433	50.0
URS08-400-B	400		22434	68345	60.0
URS08-200-C	200		4989	81934	23.0
URS08-250-C	250		8345	25423	36.0
URS08-300-C	300		11932	35794	42.0
URS08-350-C	350		16946	50838	47.0
URS08-400-C	400		21001	63003	58.0
URS08-450-C	450	100kA @950VDC L/R=10ms	31877	108956	62.0
URS08-500-C	800		45113	187802	66.3
URS08-600-C	600		48920	214913	81.3
URSE9.5-100-AM	100		1280	5504	16.0
URSE9.5-150-AM	150		2880	12384	22.0
URSE9.5-200-AM	200		5120	22016	30.0
URSE9.5-250-AM	250		8000	34400	41.0
URSE9.5-300-AM	300		11520	49536	53.0
URSE9.5-350-AM	350		15680	67424	65.0
URSE9.5-400-AM	400		20480	88064	73.0
URSE9.5-300-BM	300		10598	45573	51.0
URSE9.5-350-BM	350		14426	62030	59.0
URSE9.5-400-BM	400		18842	81019	67.0
URSE9.5-450-BM	450	100kA @1450VDC L/R=10ms	25920	111456	76.0
URSE9.5-500-BM	500		32000	137600	94.0
URSE9.5-600-BM	600		46080	198144	104.0
URSE9.5-500-CM	500		29440	126592	90.0
URSE9.5-600-CM	600		42394	182292	100.0
URSE9.5-700-CM	700		62720	269696	110.0
URSE9.5-800-CM	800		81920	352256	125.0
URSE9.5-900-CM	900		103680	445824	139.0
URSE9.5-1000-CM	1000		128000	550400	153.0
URSE14.5-100-BM	100		1512	7561	30.0
URSE14.5-150-BM	150		3403	17013	38.0
URSE14.5-200-BM	200		6049	30246	47.8
URSE14.5-250-BM	250		9452	47259	56.3
URSE14.5-300-BM	300		13611	68053	62.4
URSE14.5-350-CM	350		18526	92628	64.5
URSE14.5-400-CM	400		24197	120983	75.9
URSE14.5-450-CM	450		30624	153119	83.4
URSE14.5-500-CM	500		37807	189036	96.0
URSE14.5-600-CM	600		54442	272212	117.0
URSE14.5-700-CM	700		74102	370510	142.0
URSE14.5-800-CM	800		96786	483932	173.0

FTF,800VDC, Amps:100-600A


FTF,950VDC, Amps:100-1000A

FTF,1450VDC, Amps:100-800A



800VDC Time-Current Characteristics

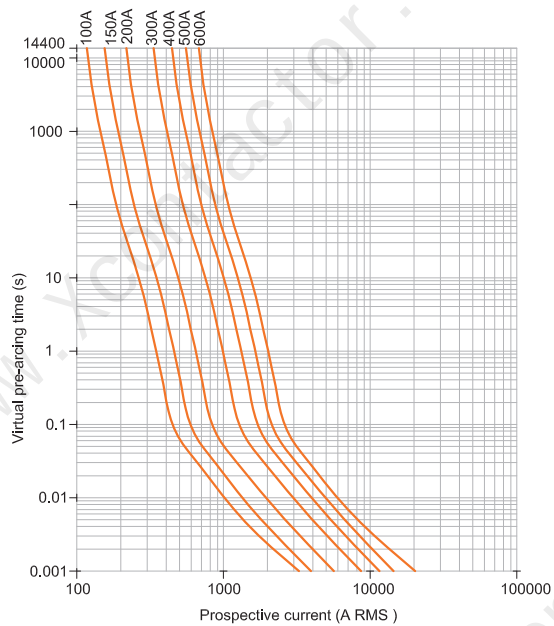


1450VDC Time-Current Characteristics

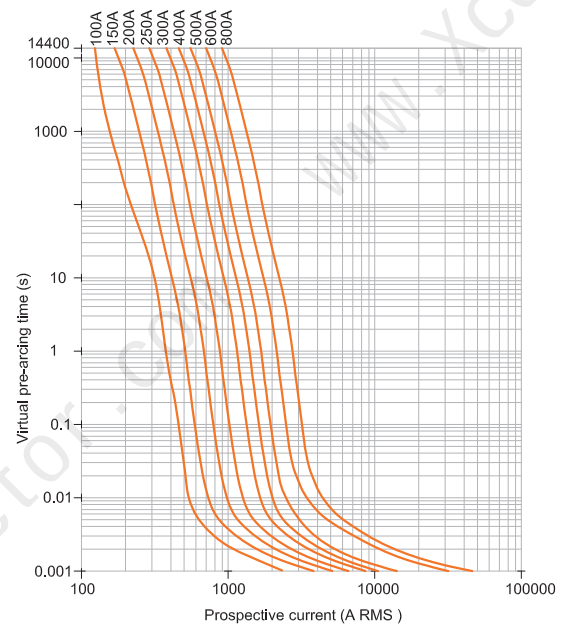



950VDC Time-Current Characteristics

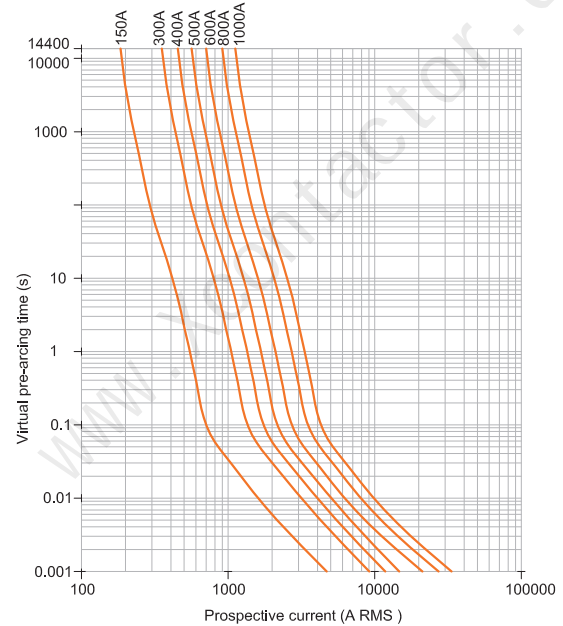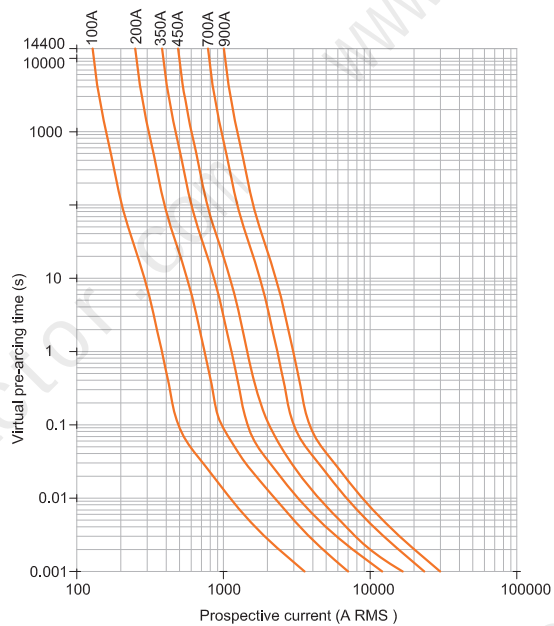

250-800VDC, EVUB series

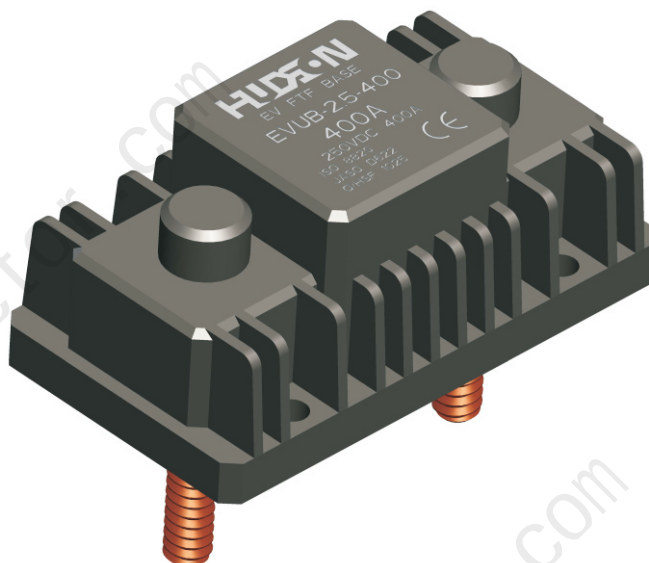

Dimensions(mm)

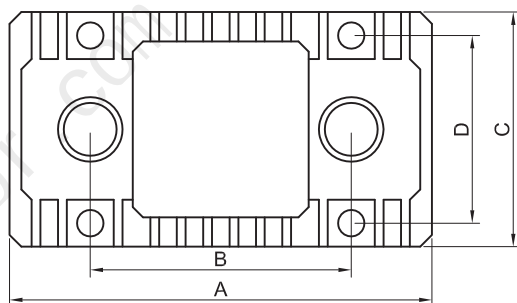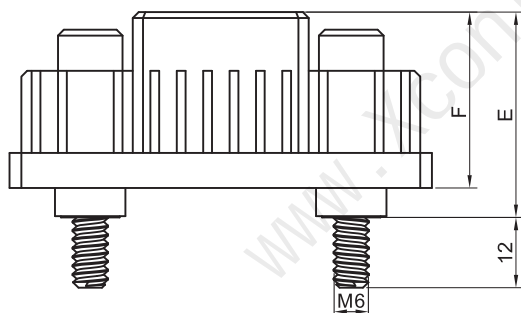


Ref.	额定电压 Rated Voltage	额定电流 Rated Amps	阻燃等级 Flame retardant	A	B	C	D	E	F
EVUB2.5-400	250VDC	400A	UL94 V-0	72	46	40	32	35	30
EVUB5.0-400	500VDC	400A	UL94 V-0	104	75	45	77	40	35
EVUB8.0-300	800VDC	300A	UL94 V-0	122	95	45	77	40	35

250-1000VDC, EVUB series



Dimensions(mm)

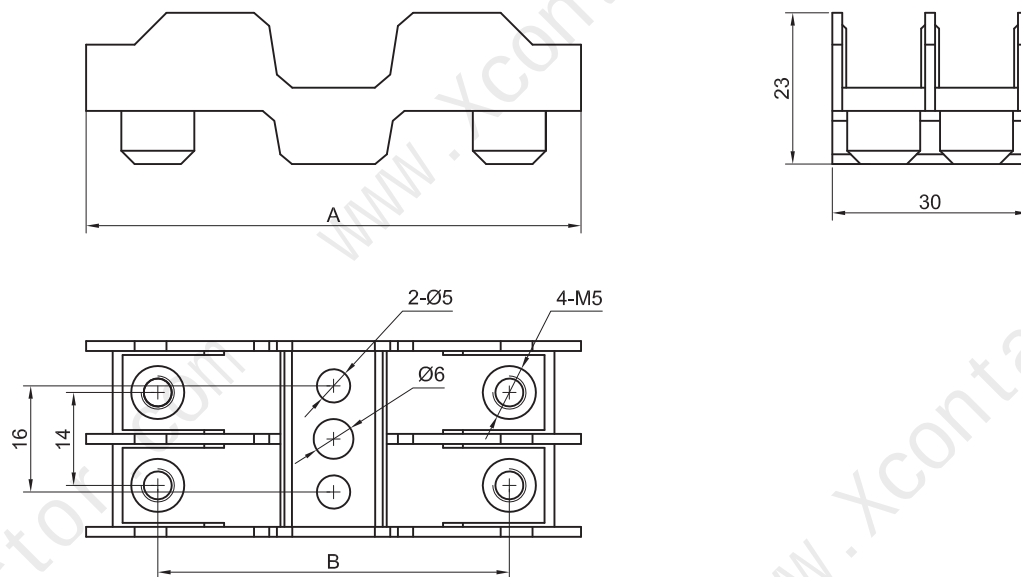



Electrical Specifications

Ref.	额定电压 Rated Voltage	额定电流 Rated Amps	阻燃等级 Flame retardant	A	B
EVUB2.5-60	250VDC	60	UL94 V-0	62	39
EVUB10-60	1000VDC	60	UL94 V-0	75	53

1000VDC, EVUB series



Dimensions(mm)

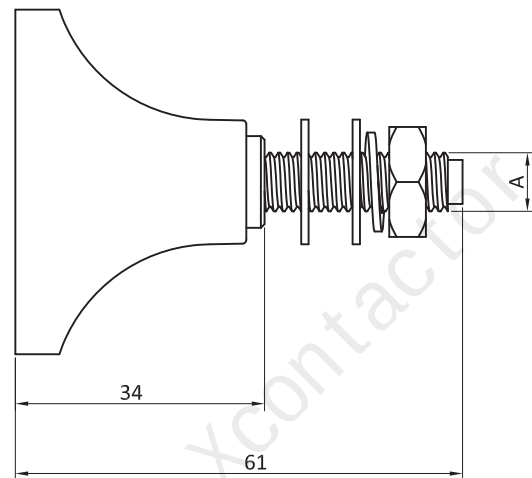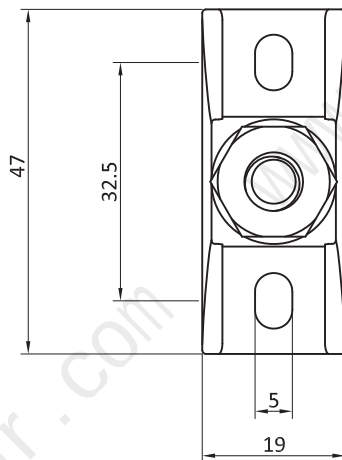

Electrical Specifications

Ref.	额定电压 Rated Voltage	额定电流 Rated Amps	阻燃等级 Flame retardant	A
URSB10-M6	1000VDC	400	UL94 V-0	M6X1/ 9Nm
URSB10-M8	1000VDC	600	UL94 V-0	M8X1.25 / 12Nm
URSB10-M10	1000VDC	800	UL94 V-0	M10X1.75 / 15Nm