



Newgy Lock Limited

Add: B5 Building, Shuiwei Industrial park, DaLang Village, Longhua
Town, Shenzhen, China

Tel: +86 755-2301 0227 Fax: +86 755-3307 8359

E-mail: info@newgylock.com Website: www.newgylock.com

NEWGY LOCK LIMITED



About newgylock

Newgy Lock Limited is a professional manufacturer of hotel electronic products and electronic locks from China since 2005. Headquartered in Shenzhen city, China.

"One world,one lock" with our principles of stability, reliability and durability, we have secured hundreds of budget, luxury and resort hotels worldwide. The product passed the European CE certification,United States FCC certification and International green environmental protection RoHs certification. Five years quality guarantee period for all products.

We have a wide range of products to meet the needs of hotel customers. hotel card lock system,finger-print door lock,electronic cabinet

lock,hotel DND system,hotel smart switch system,hotel In-room safe,hotel hair dryer,hotel minibar, electromagnetic lock system etc.

Products export to America, Europe, Asia and Africa.

America: United States, Mexico, Barbados, Brazil, Venezuela, Colombia.

Europe: Poland, Czech republic, Russia, Serbia, Slovenia.

Asia: Thailand, Bangladesh, Lebanon, Malaysia, Singapore, Indonesia, India, Pakistan, Vietnam, Armenia, Maldives, Iraq, Jordan, Saudi Arabia, The united Arab emirates.

Africa: Nigeria, Kenya, South Africa, Cameroon.



SOME CLASSIC CASES STRATEGIC COOPERATION



Here is some projects succeed in Thailand.

- 1.LEELAWADEE MODERN RESORT HUAYKWANG, BANGKOK
- 2.LEELAWADEE RESOTEL RAMINTRA, BANGKOK
- 3.LEELAWADEE RESOTEL MAHADTHAI, BANGKOK
- 4.PHANTHONG HOTEL, NAKORNPATOM
- 5.PUCK HOSTEL, BANGKOK
- 6.DE POEM LOFT HATYAI, SONGKLA
- 7.PHOTHALAI LEISURE PARK
- 8.HUB HOSTEL CHIANGMAI
- 9.JETTY HOSTEL HUAHIN, PAJUABKIRIKHAN
- 10.NORNyai HOSTEL
- 11.X9 HOSTEL BANGKOK
- 12.BANANA HOSTEL BANGKOK
- 13.MONGY GYM BANGKOK
- 14.SUARNNAPHUMI VILLE BANGKOK
15. S BLOC BOUTIQUE ROOM
- 16.DEAL HOTEL, ON-NUCH, BANGKOK
- 17.CHIANGRAI UNITED FOOTBALL CLUB
- 18.HOTEL ONCE BANGKOK
- 19.CLUB 88 HOSTEL
20. DOI SRI KEAW, CHIANGRAI

21.NASURAWONG HOTEL & APARTMENT,


- BANGRAK, BANGKOK
- 22.THE UNCLE BEACH RESORT

Here is some projects succeed in India.

1. Hotel Solitaire INN - Delhi
2. Hotel kangana - Delhi
3. Hotel RV INN - MeclodGANJ
4. Hotel Shiva castle - MeclodGANJ
5. Hotel Dechen & Palmo's - Gangtok
6. Hotel Millionaire Suites - Kanpur
7. Hotel leisure Resort - bharaich

Here is some projects succeed in Nigeria.

1. CHIDA International Hotel, Abuja.
2. ETF, Abuja.
3. NCC, Abuja.
4. Court of Appeal, Abuja.
5. DEMAR, Lagos.
6. Presidency, Abuja.
7. NICON, Abuja.
8. SUBEB, Lagos.

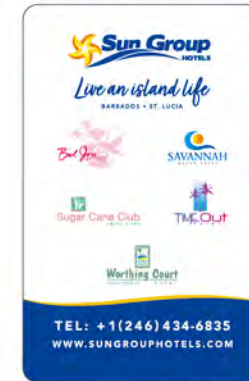



9. IB Plc, Lagos.
10. NACA, Abuja.
11. NORDIC Villa, Abuja.
12. Dominion Resort, Abuja.
13. NORDIC Residence, Abuja.
14. Tokee Apartment, Abuja.
15. Princess AZ ZAHRA Logde, Minna
16. Massgate Resort, Abuja.
17. Sambeat Hotel
18. De Santiago Milan Hotel & Suites
19. Don Reb, Abuja.

Here is some projects succeed in Kenya.

1. Green Hills hotel
2. Royal City hotels
3. Grand royal Swiss hotel
4. Whirlspring Hotel
5. Wigot Hotel
6. Cold spring hotel
7. Tafari castle hotel
8. Falcon heights hotel
9. Melili Hotel
10. Cameron Hotels

Here is some projects succeed in Cameroun.

1. Somatel hotel


Here is some projects succeed in Vietnam.

1. resort in Phu Quoc island
2. laveranda resort
3. Saigon- Phu Quoc resort
4. Ho Tram Osaka resort


Here is some projects succeed in Indonesia.

1. Aston Semarang Hotel


Newgy One Card System Configuration

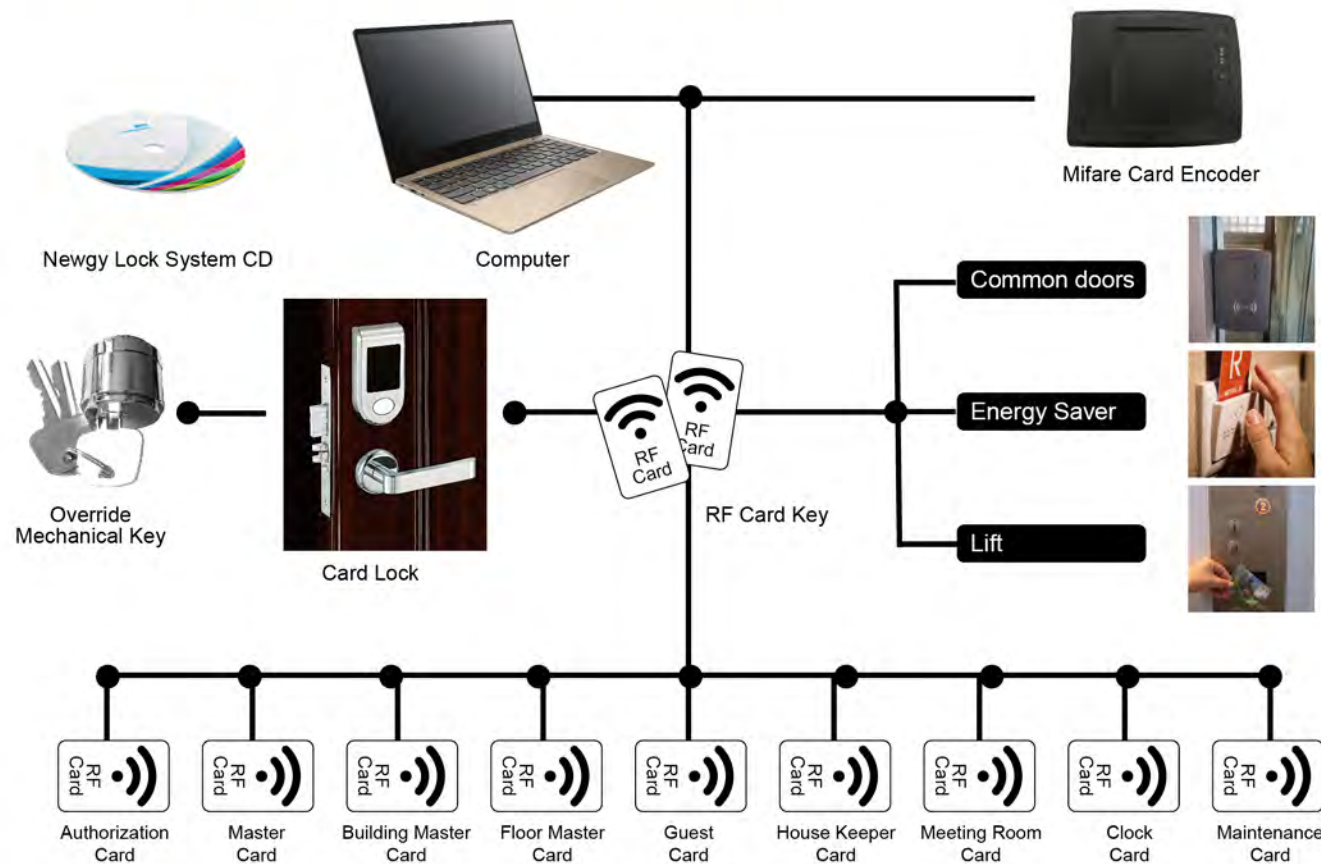


Smart Card Basic Function

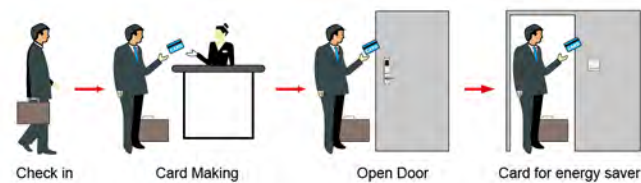

Smart Card Extensive Function

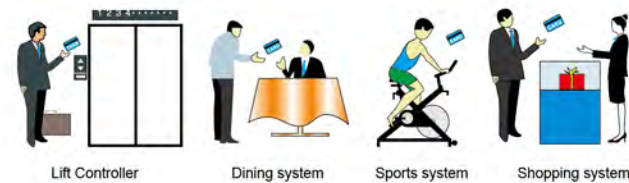


6002 Europe Standards Model

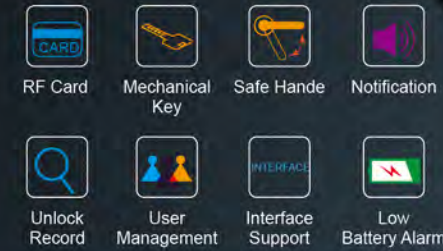

Silver



Golden

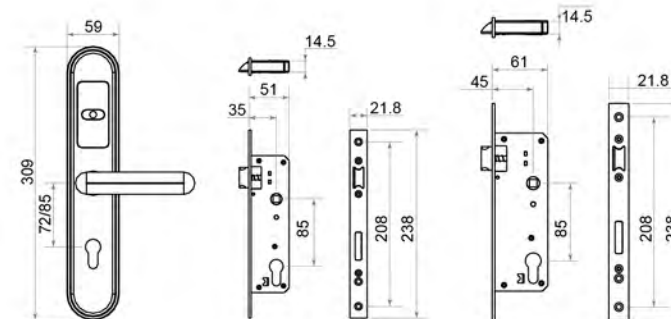


Features

- CE,FCC and RoHS approved.
- Europe standard 3585 or 4585 mortise..
- 980 pieces lock records.
- 304 Stainless steel material.
- Stand alone electronic lock with Mifare 13.56Mhz technology.
- Powered by 4AA batteries up to 2 year normal life time.
- Compatible with Mifare energy saver and elevator control system.
- Low battery voltage and Lock failure alarm function.
- Interface with most of the PMS systems


Specifications

- Card technology: Mifare 1K card, 13.56Mhz
- Working voltage: DC6V,4pcs Alkaline batteries.
- Working temperature: -20℃--60℃
- Working humidity: 10%~85% RH
- Power consumption: Static current:≤20μA, Dynamic current≤200 mA
- Lock Material: SUS304 stainless steel.
- Door thickness: Door thickness for 35-55mm above.

Newgy 2020 New Model

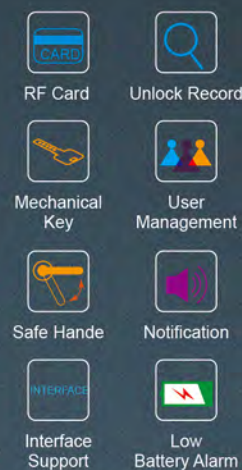

5002 Slim Model

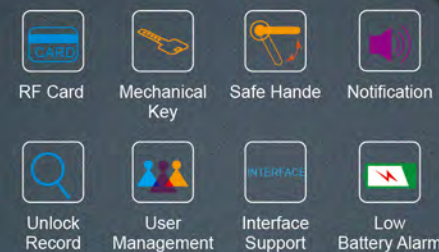

Features

- CE,FCC and RoHs approved.
- ANSI Standard mortise.
- 980 pieces lock records.
- 304 Stainless steel material.
- Stand alone electronic lock with Mifare 13.56Mhz technology.
- Powered by 4AA batteries up to 2 year normal life time.
- Compatible with Mifare energy saver and elevator control system.
- Low battery voltage and Lock failure alarm function.
- Interface with most of the PMS systems.

Specifications


- Card technology: Mifare 1K card, 13,56Mhz
- Working voltage: DC6V,4pcs Alkaline batteries.
- Working temperature: -20℃--60℃
- Working humidity: 10%~85% RH
- Power consumption: Static current:≤20μA, Dynamic currents≤200 mA
- Lock Material: stainless steel.
- Door thickness: Door thickness for 38-55mm above.



Silver




Golden

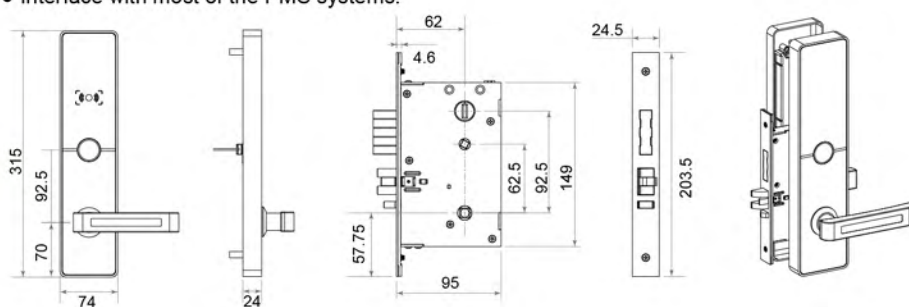

Silver



Golden

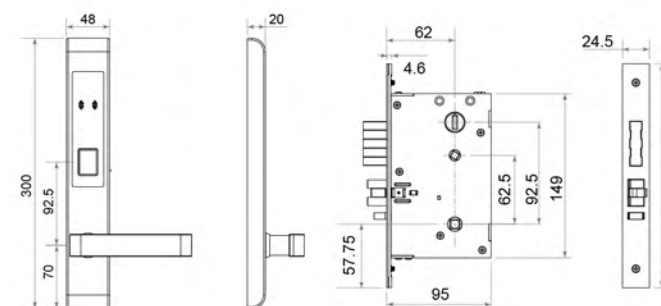


Features

- CE,FCC and RoHs approved.
- ANSI Standard mortise.
- 980 pieces lock records.
- 304 Stainless steel material.
- Stand alone electronic lock with Mifare 13.56Mhz technology.
- Powered by 4AA batteries up to 2 year normal life time.
- Compatible with Mifare energy saver and elevator control system.
- Low battery voltage and Lock failure alarm function.
- Interface with most of the PMS systems.

Specifications

- Card technology: Mifare 1K card, 13,56Mhz
- Working voltage: DC6V,4pcs Alkaline batteries.
- Working temperature: -20℃--60℃
- Working humidity: 10%~85% RH
- Power consumption: Static current:≤20μA, Dynamic currents≤200 mA
- Lock Material: stainless steel.
- Door thickness: Door thickness for 38-55mm above.

6000,6001,6003 Newgy Classic Model



RF Card

Mechanical
Key

Safe Handle




Notification

Unlock
RecordUser
ManagementInterface
SupportLow
Battery Alarm

Silver

Golden


6000

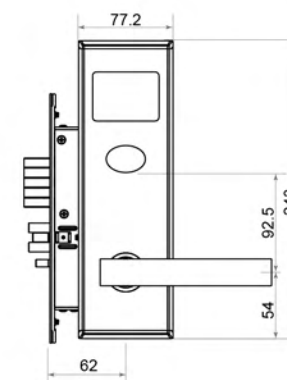

Silver

Golden


6001

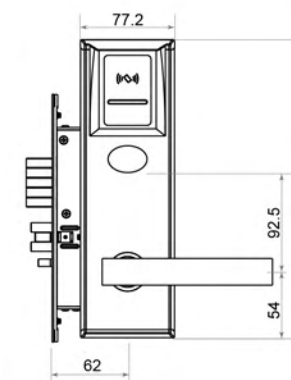

Silver

Golden

6003

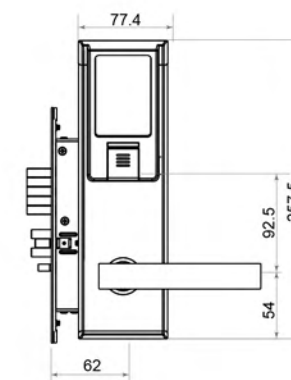

Features


- CE,FCC and RoHs approved.
- ANSI Standard mortise.
- 980 pieces lock records.
- 201 Stainless steel material.
- Stand alone electronic lock with Mifare 13.56Mhz technology.
- Powered by 4AA batteries up to 2 year normal life time.
- Compatible with Mifare energy saver and elevator control system.
- Low battery voltage and Lock failure alarm function.
- Interface with most of the PMS systems.

Specifications


- Card technology: Mifare 1K card, 13,56Mhz
- Working voltage: DC6V,4pcs Alkaline batteries.
- Working temperature: -20℃-60℃
- Working humidity: 10%-85% RH
- Power consumption: Static current:≤20μA, Dynamic currents 200 mA
- Lock Material: 201 stainless steel.
- Door thickness: Door thickness for 38-55mm above.



8000 Luxury Model

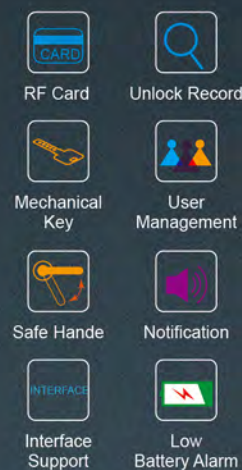

9000 Luxury Model

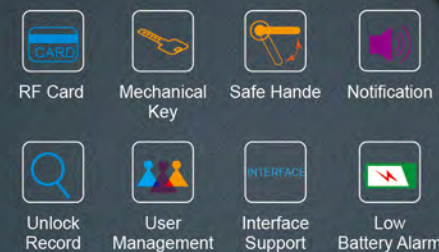

Silver




Golden

Features

- CE,FCC and RoHs approved.
- ANSI Standard mortise.
- 980 pieces lock records.
- 304 Stainless steel material.
- Stand alone electronic lock with Mifare 13.56Mhz technology.
- Powered by 4AA batteries up to 2 year normal life time.
- Compatible with Mifare energy saver and elevator control system.
- Low battery voltage and Lock failure alarm function.
- Interface with most of the PMS systems.

Specifications


- Card technology: Mifare 1K card, 13,56Mhz
- Working voltage: DC6V,4pcs Alkaline batteries.
- Working temperature: -20℃--60℃
- Working humidity: 10%~85% RH
- Power consumption: Static current:≤20μA, Dynamic currents≤200 mA
- Lock Material: stainless steel.
- Door thickness: Door thickness for 38-55mm above.

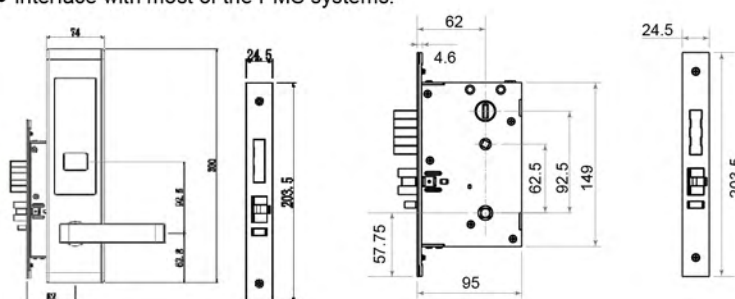

Silver



Golden

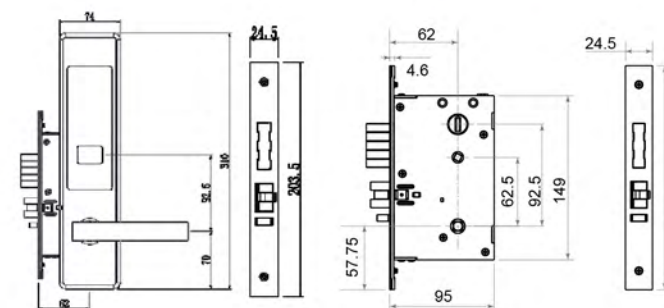

Features

- CE,FCC and RoHs approved.
- ANSI Standard mortise.
- 980 pieces lock records.
- 304 Stainless steel material.
- Stand alone electronic lock with Mifare 13.56Mhz technology.
- Powered by 4AA batteries up to 2 year normal life time.
- Compatible with Mifare energy saver and elevator control system.
- Low battery voltage and Lock failure alarm function.
- Interface with most of the PMS systems.

Specifications

- Card technology: Mifare 1K card, 13,56Mhz
- Working voltage: DC6V,4pcs Alkaline batteries.
- Working temperature: -20℃--60℃
- Working humidity: 10%~85% RH
- Power consumption: Static current:≤20μA, Dynamic currents≤200 mA
- Lock Material: stainless steel.
- Door thickness: Door thickness for 38-55mm above.



Elevator Reader and Controller

The elevator controller provides access control on elevator. Holding one key card, you can get access both elevator and guest room.

Features

Card type: Mifare card
Card detecting distance: 10—50 mm
Working with same software of NEWGY hotel lock system.
Mini external reader.
1000 pcs entries records.
2 control modes for choice.
Mode A: Manual floor control. You should choice and press the floor button number after you read the room card to elevator controller reader.
Mode B: Auto floor control. The floor will go to your floor directly after you read the room card to elevator controller reader. No need press button.

Technical parameters

Power supply: 12V DC
Current: 1000 mA
Card type: Mifare card
Detecting distance: 10-5mm
Input: N/A
Output: 8 or 16 groups normally-closed (NC) contacts
8 or 16 groups normally-open (NO) contacts
Working temperature: -20 °C --70 °C
Storage temperature: -25 °C --125 °C
Humidity: 5%--95%



Wall Reader

The wall reader provides access control on common areas, such as parking lot, sauna room, conference room and office etc. Holding one key card, you can get access both common areas and guest room.

Common areas access controller

Card type: Mifare card
Card detecting distance: 10—50mm
Working with same software of NEWGY hotel lock system.
1000 pcs entries records.
Only the hotel install NEWGY hotel lock system can use it. It only work with all guest cards issued from NEWGY hotel lock system.
No floor control function.
Encryption processing.

Technical parameters

Power supply	12V DC	Working temperature	20 °C --70 °C
Current	1000 mA	Storage temperature	-25 °C --125 °C
Card type	Mifare card	Humidity	5%--95%
Detecting distance	10-50mm		

Energy Saver Switch




MF01-B



MF01-G



MF01-W

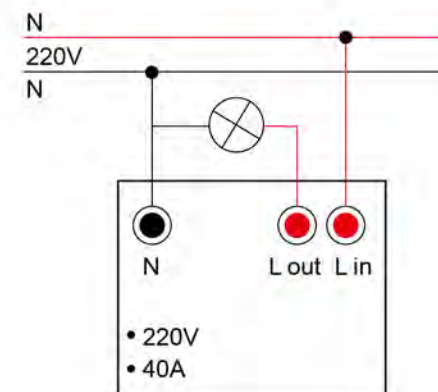


Frequency Type

Size: 86mm x 86mm
A/C 220V
Mifare 13.56MHz
Any mifare card can get power.
Name card can't get power.
Suitable model: MF01-W, MF01-B, MF01-G

Room Only Type

Size: 86mm x 86mm
A/C 220V
Mifare 13.56MHz
Only specific room card can get power.
With room number and time control function.
Name card can't get power.
Suitable model: MF01-W

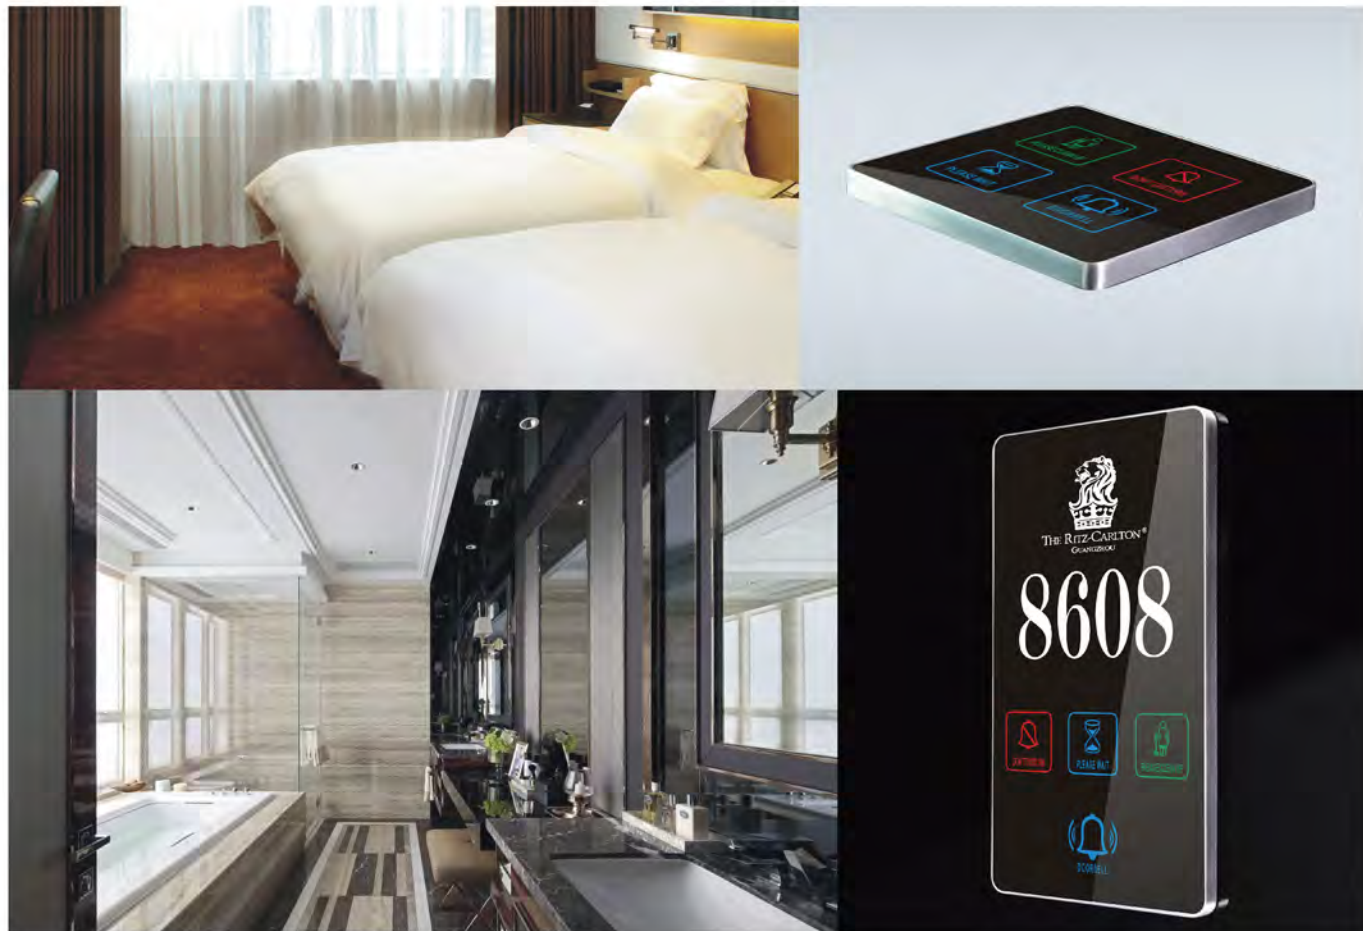

MLA2




MLB1



MLE1



MLD1

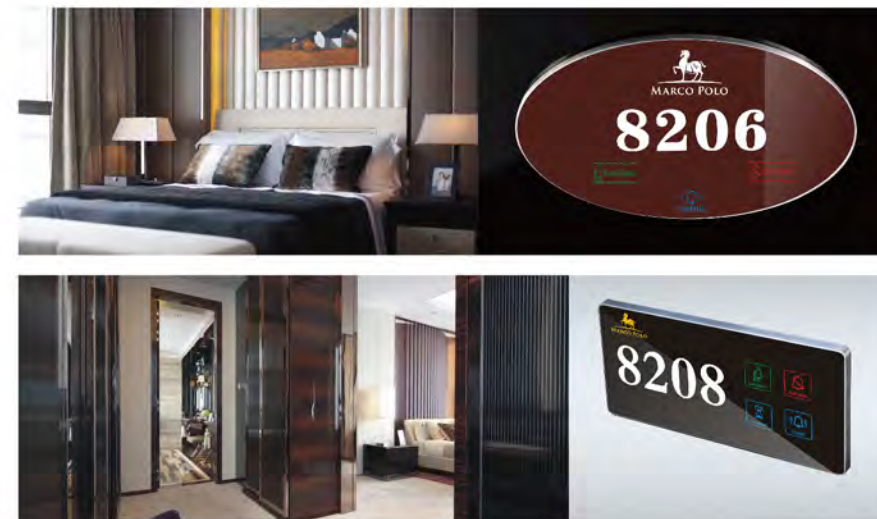

Specifications

- LCD touch screen.
- Personalized hotel logo.
- Room number, Doorbell, Wait, Make up room and DND functions.
- Borders: (Zinc alloy material) gold / silver color
- Panel: (Micro crystal material or toughened glass) black / coffee color
- Room number backlit optional: white / blue
- Installation: The standard installation of 86 box.
- Voltage: AC 110V~230V, DC 12V~5V
- Method of connect wire: Null wire, Live



Super Slim



Multi-color



LED Light



Security




Modular



AC/DC

Wiring Diagram-220V

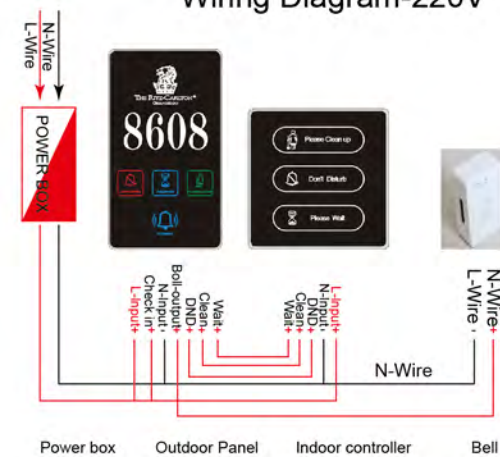

130×230mm

Hotel name and logo

Micro crystal plate

LCD hotel room number display

Please wait function

Please clean up function

Don't disturb(clean up,doorbell interlock)

The icon of DOORBELL will light up when you get into room and insert key card into energy saver switch.

Ultrathin zinc alloy frame is only 9mm

Hotel Digital Safe



1006B



1006BW



1005B



1004B

- * Great for hotels, students, home or office.
- * Large enough for most laptops.
- * Electronic motorized lock.
- * Emergency Override Keys.
- * Lock Type: Electronic Motorized lock.
- * Power Supply: 4 AA batteries inserted on inside of safe.
- * Override Key: Two override keys included.

Model Number	1006B/1006BW/1005B/1004B
Gross Weight	12.0KG
Net Weight	11.0KG
Body Thickness	2.0mm
Door Thickness	5.0mm

Features

- * Keyless Entry – Quickly unlock in seconds with easy to use push-button codes. Two programmable codes available.
- * Key Override – Comes with 2 back up keys for emergencies.
- * Dual Locking Bolts – Secure your valuables with dual solid steel locking bolts for extra protection.

Product Dimension	(H*W*D) 200X420X370mm
Carton Dimension	(H*W*D) 260X455X405mm
Batteries Included?	No
Batteries Required?	Yes
Guarantee	3 years



25BC

- * Electronic thermostat, Intelligent automatic defrosting system controlled by an IC chip.
- * II Generation of absorption cooling technique, totally noiseless when working.
- * Foaming with clopentane (C5H10), a CFC Free thermal insulation with ultra cooling efficiency.
- * Over-head light design, low rated power LED light (magnet sensor).
- * 100% antibacterial removable soft PVC door seal.
- * HIPS antibacterial liner to dispel the odor and keep the original taste.
- * Easy-operated thermal regulator for convenient adjustment.
- * 2 shelves.
- * Easy-operated door knob.
- * Lock and master key.
- * Reversible door Opening Available.

Door Type	Foamed Glass
Volume	25L
Net Weight	15.0KG
Gross Weight	16.5KG
Temperature Range	0-8°C
Package	(L)480*(W)460*(H)545mm
Dimensions	(L)380*(W)400*(H)480mm
Rated Power	65W
Voltage/Frequency	AC220/100/110V 50/60Hz
Cable length	1.6m
Power Consumption	0.9KW.h/24H
Color	dark gray, black, ivory, silver or specified



30AA

- * Electronic thermostat, Intelligent automatic defrosting system controlled by an IC chip.
- * II Generation of absorption cooling technique, totally noiseless when working.
- * Foaming with clopentane (C5H10), a CFC Free thermal insulation with ultra cooling efficiency.
- * Over-head light design, low rated power LED light (magnet sensor).
- * 100% antibacterial removable soft PVC door seal.
- * HIPS antibacterial liner to dispel the odor and keep the original taste.
- * Easy-operated thermal regulator for convenient adjustment.
- * 1 shelf and 2 bottle racks.
- * Easy-operated door knob.
- * Lock and master key.
- * Reversible door Opening Available.
- * Sliding Hinge.

Door Type	Foamed Glass
Volume	30L
Net Weight	14.4KG
Gross Weight	16.5KG
Temperature Range	0-8°C
Package	(L)480*(W)460*(H)545mm
Dimensions	(L)420*(W)400*(H)480mm
Rated Power	65W
Voltage/Frequency	AC220/100/110V 50/60Hz
Cable length	1.6m
Power Consumption	0.9KW.h/24H
Color	dark gray, black, ivory, silver or specified



40BB

- * Electronic thermostat, Intelligent automatic defrosting system controlled by an IC chip.
- * II Generation of absorption cooling technique, totally noiseless when working.
- * Foaming with clopentane (C5H10), a CFC Free thermal insulation with ultra cooling efficiency.
- * Over-head light design, low rated power LED light (magnet sensor).
- * 100% antibacterial soft PVC door seal.
- * HIPS antibacterial liner to dispel the odor and keep the original taste.
- * Easy-operated thermal regulator for convenient adjustment.
- * 2 shelves.
- * Easy-operated door knob.
- * Reversible door Opening Available.
- * Lock and key Option Available.
- * Door open indicator Available.

Door Type	Glass
Volume	40L
Net Weight	18.2KG
Gross Weight	20.3KG
Temperature Range	4-12°C
Package	(L)500*(W)460*(H)610mm
Dimensions	(L)435*(W)400*(H)550mm
Rated Power	65W
Voltage/Frequency	AC220/100/110V 50/60Hz
Cable length	1.6m
Power Consumption	0.9KW.h/24H
Color	dark gray, black, ivory, silver or specified



60A

- * Electronic thermostat, Intelligent automatic defrosting system controlled by an IC chip.
- * II Generation of absorption cooling technique, totally noiseless when working.
- * Foaming with clopentane (C5H10), a CFC Free thermal insulation with ultra cooling efficiency.
- * Over-head light design, low rated power LED light (magnet sensor).
- * 100% antibacterial soft PVC door seal.
- * HIPS antibacterial liner to dispel the odor and keep the original taste.
- * Easy-operated thermal regulator for convenient adjustment.
- * 2 shelves.
- * Easy-operated door knob.
- * Reversible door Opening Available.
- * Lock and key.
- * Door open indicator.

Door Type	Glass
Volume	60L
Net Weight	18.5KG
Gross Weight	20.5KG
Temperature Range	0-8°C
Package	(L)580*(W)550*(H)630mm
Dimensions	(L)500*(W)485*(H)560mm
Rated Power	80W
Voltage/Frequency	AC220/100/110V 50/60Hz
Cable length	1.6m
Power Consumption	1KW.h/24H
Color	dark gray, black, ivory, silver or specified