



Tattoo Plus 75

CIGGO Tattoo Plus includes:

1* CIGGO Tattoo Plus Box Mod

1* User Manual

Specification

Size: 88mm*26.5mm*42.8mm

Output Mode: TEMP-Ni/ TEMP-Ti/ TEMP-SS/POWER/BYPASS

Output Wattage: 1W~75W

Support resistance: Above 0.05Ω

Temperature range: 100℃~315℃ (200~600 ℉)

Each +/- increase or decrease 5℃/10 ℉

Hidden Full Length LED Display, Durable Stainless Steel, Single 18650 battery (sold separately),


Max Discharge Current over 20 A,

510 Thread.



Pieces & Parts

- A) Fire Button
- B) Adjust Up Button
- C) Adjust Down button
- D) USB Port (underneath)
- E) Hidden Screen
- F) Front Side

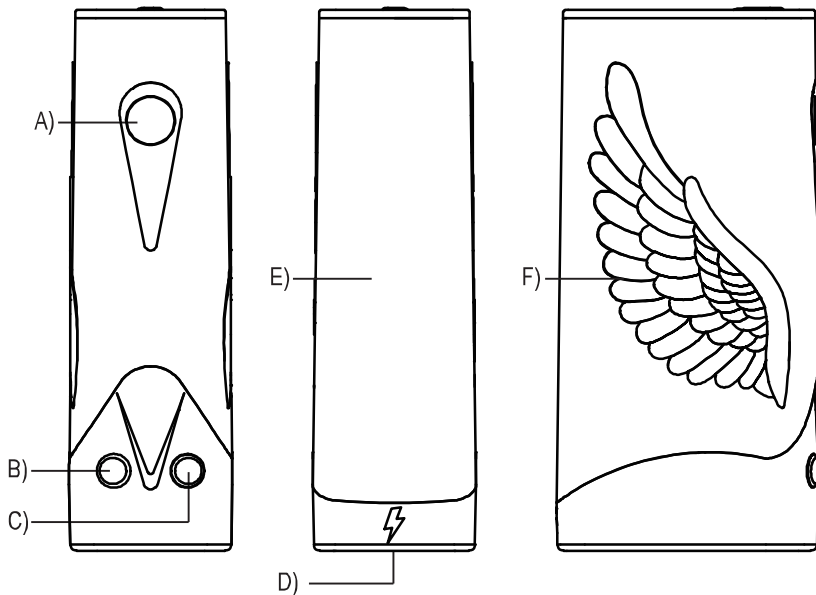

How to Use

1. Turn On/Turn Off:

Slide off the battery cover, and put 1pc 18650 cell into the battery holder(recommends: high-rate and better branded 18650 cells, Max discharge current over 20A)

Press the firing button 5 times within 2S to turn on the device on/off, Power on screen display "CIGGO", and then enter Resistance Screen.

2. Details Operation Steps


Enter Setting Mode:

Press both adjustment buttons simultaneously. Come out interface image B, then press "+" and "-" together in 3 seconds to select a working mode. Once desired mode is reached, press the fire button to confirm.

Long Press "+" and "-" together over 5 seconds. The screen will show "UPDATE". Then the whole mod freezes. You have to actually remove the batteries and then put them back in to get it to work.



Display Screens:

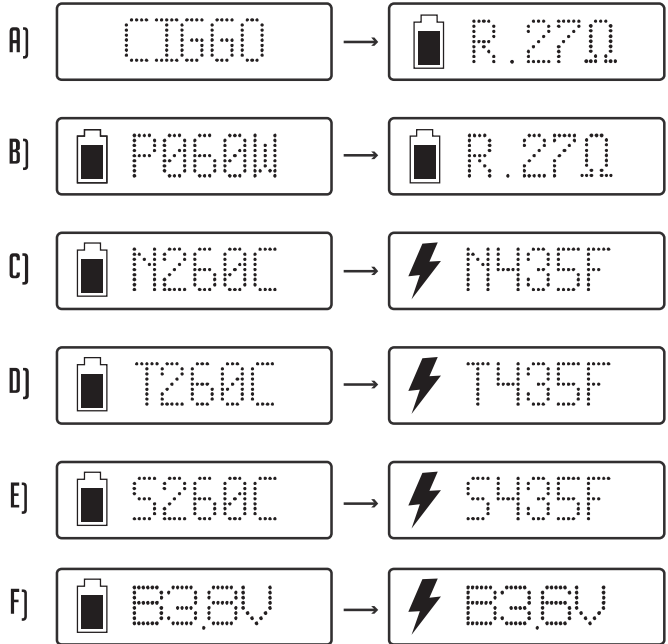- A) Turning on Screen
- B) Power Mode
- C) Nichrome TC Mode
- D) Titanium TC Mode
- E) Stainless Steel TC Mode
- F) BYPASS Mode



3. Vaping

Hold the firing button and inhale from the atomizer mouthpiece, release the firing button and exhale

The “” battery symbol will change to “”lightning symbol

4. Adjust power:

Press adjustment buttons. Longer press=Faster adjustment

(After you have made your selection/adjustments, the display will show your power output for 1s and then your resistance for 3s)

How to Switch Fahrenheit and Celsius

Press “+” “-” to get temperature up and down. Celsius increases/decreases 5 °C each time. Once temperature reaches

315 ℃, press “+” shortly to switch to Fahrenheit. (Fahrenheit increases/ decreases 10F each time). Repeat this operation, Celsius and Fahrenheit will switch.

5. How to adjust wattage under Ni/Ti/SS MODE:

Press fire button and “+” simultaneously or press fire button and “-” simultaneously, then you can adjust wattage.

6. Invalid to press “+” “-” under BYPASS MODE. It's mechanical mode, you can vape directly.

7. Short Circuit Protection :

If the device didn't screw with atomizer or the atomizer resistance is exceed supporting range, screen display “Ω”symbol flashing 3 times.

8. Standby Mode:

If no more operation within 30S, the device will shut off the screen. Press fire button, display screen will light up again.

9. Over Discharge Remind Protection :

If vaping voltage is lower than 3.3V, the battery symbol will flash 5 times to remind you the device needs charging, and it turns off automatically.

10. Over Intake Protection :

Single puff over 10S, device will stop output.

11. Over heat Protection:

If device inner temperature is over 70℃ under VW mode, the screen will display "HOT", you need to wait till the temperature goes down to below 68℃.

12. Shut OFF Screen Function :

Pressing "+" and "-" simultaneously can shut off and turn on the screen.

13. Vaping Level Check Function:

Pressing "fire button" and "+" simultaneously can check your vaping level.

14. Charging & Upgrade Your Device

5V 1A Micro USB charging port for charging and upgrade your program.

How to edit your led screen:

- 1) Make sure your box mod don't have battery cell inside.
(if you already have battery cell inside , please take it out), keep the box mod empty or at least the battery slider is open.
- 2) Press both "+" and "-" at the same time , and put the battery cells into the box mod , then cover back the the battery slider.
- 3) after operation 2) , screen shows "C0" (image F), it means you are setting the first word. When the setting letter chosen , the letter will flash (image G), press "+" or "-" to select the letter or number you want to choose.



image F (C0)



image G

2. Short press both "+" and "-" edit next letter.

3. Press fire button and "+" at the same time (image H), editing next word , screen shows Co, C1(image I), C2, ...C9, then the word first letter is flashing , it means you are editing.

Repeat the operation , you will see C0, C1,C2, C3, C4, C5,C6,C7.C8,C9 , total 10 sets of words.



image H



image I

4. To finish the settings, long press on fire button and "-" (image J) until the screen shows "END"(image K) , settings are done.



image J



image K

Warm promopt:

- 1.If you failed with screen editing, please recheck if you've followed correct operating steps , as buttons not press at the same time , or cover back the battery slider too early, both will cause unsuccessful opeartion. Please be patient and try more times.
2. If the screen occurs messy code, commonly take out the battery and instal the battery again will solve the problem.

Possible side effect:

Using this device can cause dehydration and lead to mouth and throat irritation, if it's occurs, please change your power and/or airflow setting and/or the your e-liquid.



The crossed-out dustbin symbol indicates that batteries, rechargeable batteries, button cells, battery packs, etc. must not be put in the household waste; batteries are harmful to health and the environment. Please help to protect the environment for health risks. Dispose of battery in accordance with your local battery recycling or disposal law.



Waste Electrical and Electronic Equipment (WEEE) When this device is out of use. Bring electrical appliance to the local collecting points for waste electrical and electronic equipment. The rest of the component can be put in household waste.

120 Day Limited Warranty

This limited warranty does not cover any problem that is caused by:

- A) Conditions, malfunctions or damage not resulting from defects in material or workmanship.
- B) Conditions, malfunctions or damage resulting from normal wear and tear, improper installation, Improper maintenance, misuse, abuse, negligence or accidental alteration.
- C) Connected materials and/or products not manufactured by Praxis vapors.

Our Limited warranties are void if a product is returned with removed, damaged or tampered labels or any alterations, including removal or alteration of any internal or external components.

This Warranty extends to the original purchaser only and is non-transferable.
Purchaser is required to show proof of purchase for any claims.

Contact: service@ciggo.com for warranty inquiries.



DESIGNED IN CALIFORNIA
MANUFACTURED BY CIGGO®



CUSTOMER SUPPORT: SERVICE@CIGGO.COM

The CigGo logo is centered in the upper half of the image. It features the word "CigGo" in a white, sans-serif font, with a registered trademark symbol (®) to the upper right of the "o". The background is a dark gray with a repeating pattern of lighter gray, stylized lightning bolts or jagged triangles pointing in various directions.

CigGo®

DESIGNED IN CALIFORNIA
MANUFACTURED BY CIGGO®

Tattoo Plus 75