


Timi-Lit RK Series

Lithium Battery



SPECIFICATIONS

Model	Timi-Lit RK3000A	Timi-Lit RK5000A
Rated energy	3.07kWh	5.12kWh
Rated voltage	51.2V	51.2V
Rated capacity	60Ah	100Ah
Voltage range	40~58.4V	40~58.4V
Recommended charge current	≤ 30A	≤ 50A
Max. discharge current	70A	100A
Cycle life	>6000 cycles @ 80% DOD	>6000 cycles @ 80% DOD
Dimension (W*D*H, mm)	442*430*88	442*470*154
Weight	30kg	46kg
Communication Mode	RS485 / CAN	
Charging temperature	0℃~45℃	
Discharging temperature	-20℃~60℃	
Recommended storage temperature	15℃~35℃	


-  Intelligent BMS
-  Top Quality Battery Cell
-  Super Safety
-  Long Lifespan



Indoor Cabinet



Outdoor Cabinet

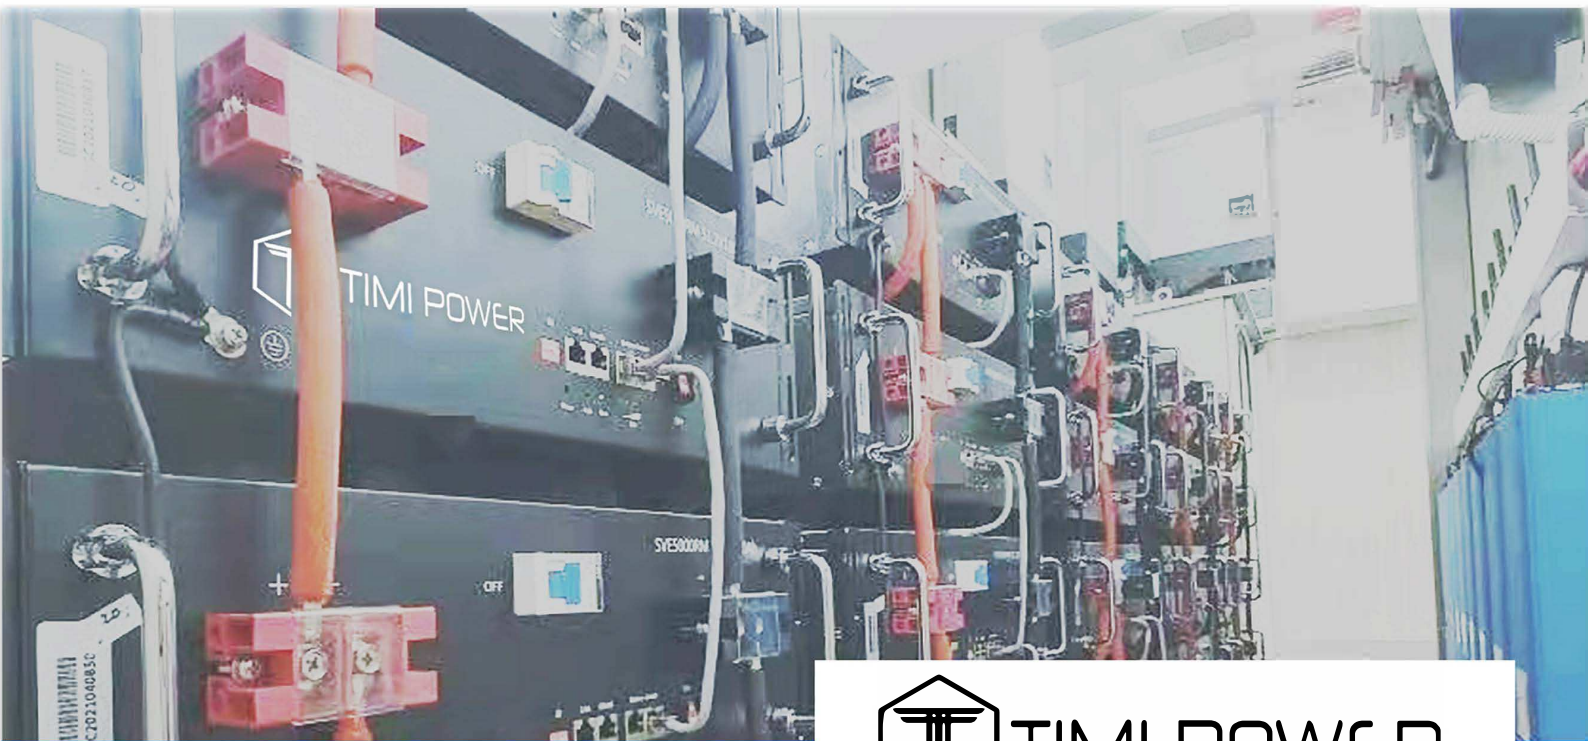

info@timipower.com

