




Mount for Starlink® Mini

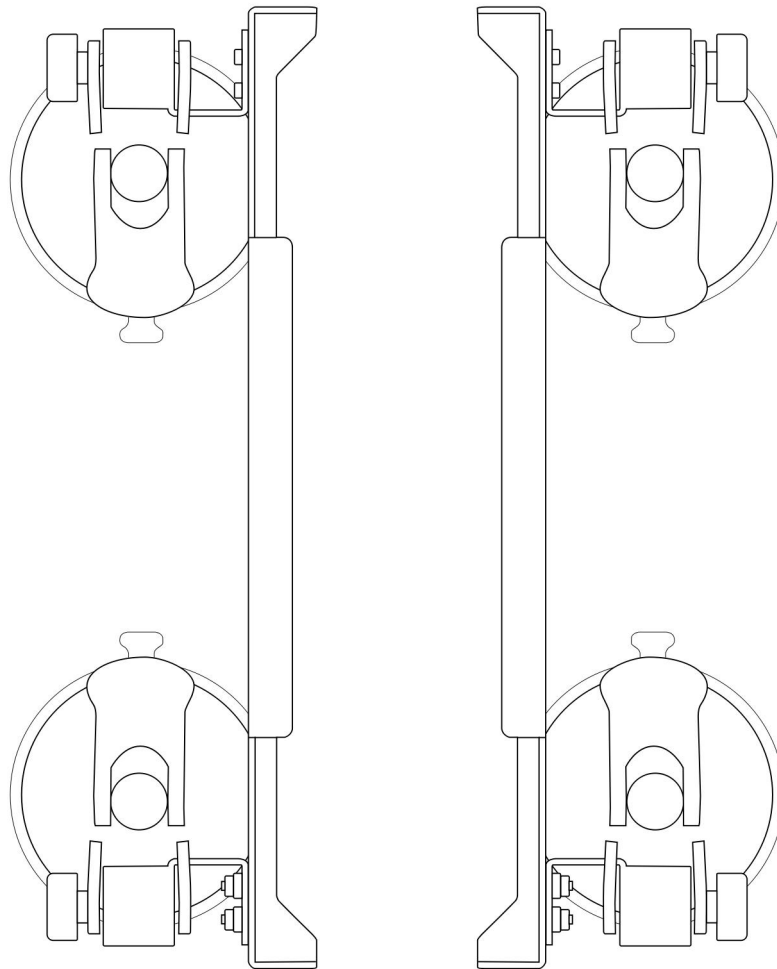

Quick Start

V 1.1

Introduction


The suction cup mount is specially designed for Starlink Mini, allowing secure attachment to various vehicles and flat surfaces.

When in use, firmly attach the mount to a smooth surface to ensure stability during travel, preventing equipment damage from road vibrations.

Notes:

- Before installation, make sure the mounting surface is clean and flat to maintain the vacuum state of the suction cup.
- After installation, gently shake the mount to confirm it is securely fixed.
- For long-term use, check the stability of the mount regularly.
- Remove the mount promptly when not in use. Do not leave it hanging for extended periods.
- If the suction cup is damaged, please contact customer service to purchase a replacement for reinstallation.
- Dust, humidity, temperature, and installation method may reduce or eliminate suction. Reliable installation on the exterior of a vehicle cannot be guaranteed, especially at high speeds where detachment may occur.

What's In the Box

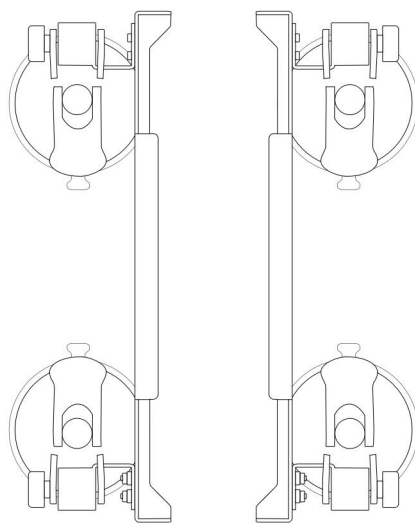


Mount



Hex Key

Device Overview

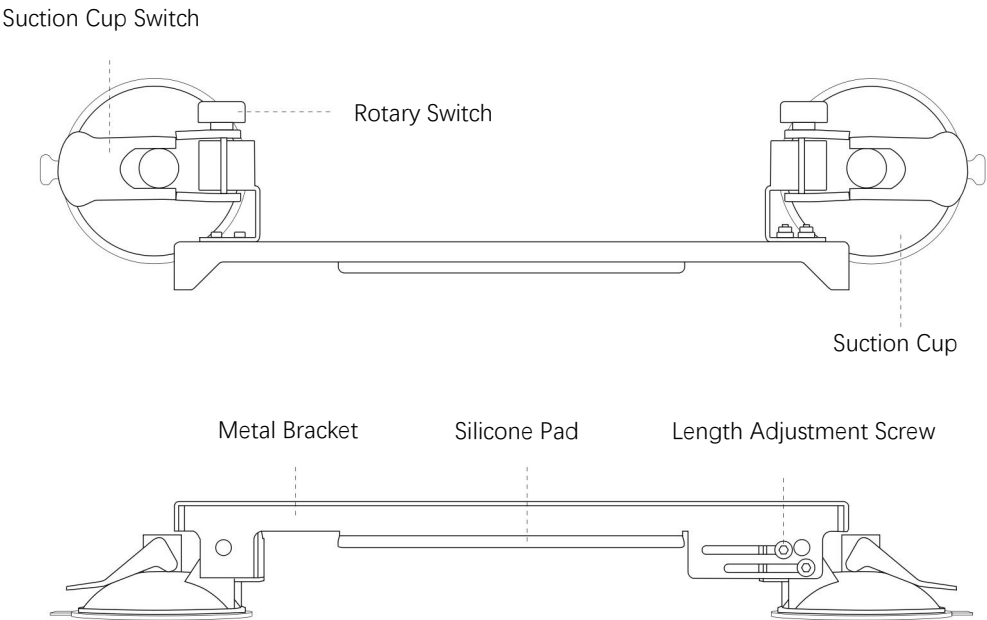


Installation Steps

- 1. Make sure the mounting surface is clean and flat.
- 2. Decide the installation position according to the usage scenario (e.g., inside or outside the vehicle), and choose the appropriate installation method.

outside the vehicle




Inside the vehicle




Sunroof

3. Adjust the suction cup position with the hex key according to the surface size.

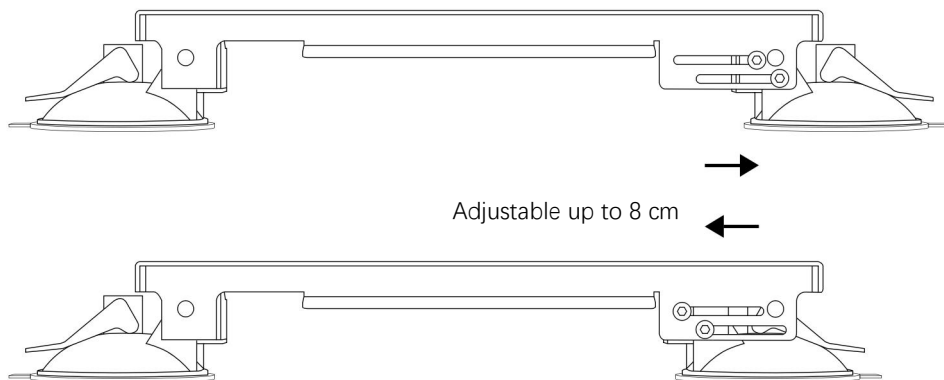

4. Lift the suction cup switch, place the suction cup on the surface, then press the switch down to secure it.

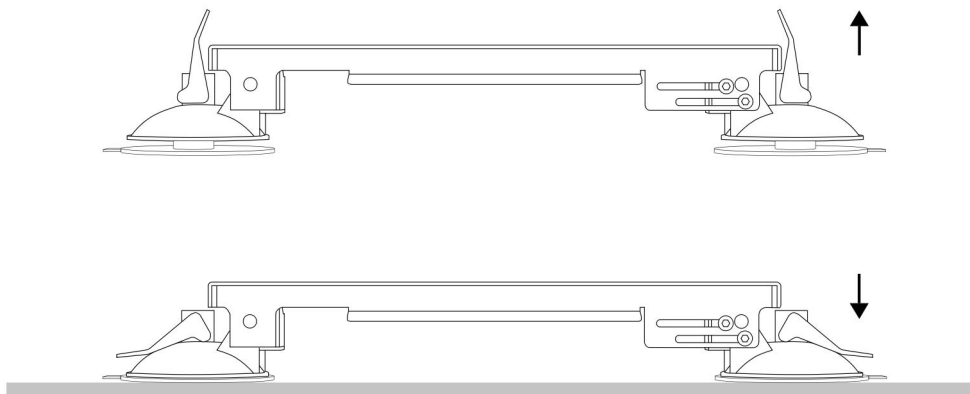

5. Attach the Starlink Mini securely onto the bracket.
6. Repeat the same steps for the other bracket to secure the Starlink Mini. Installation is now complete.

