



QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

350QH-35G

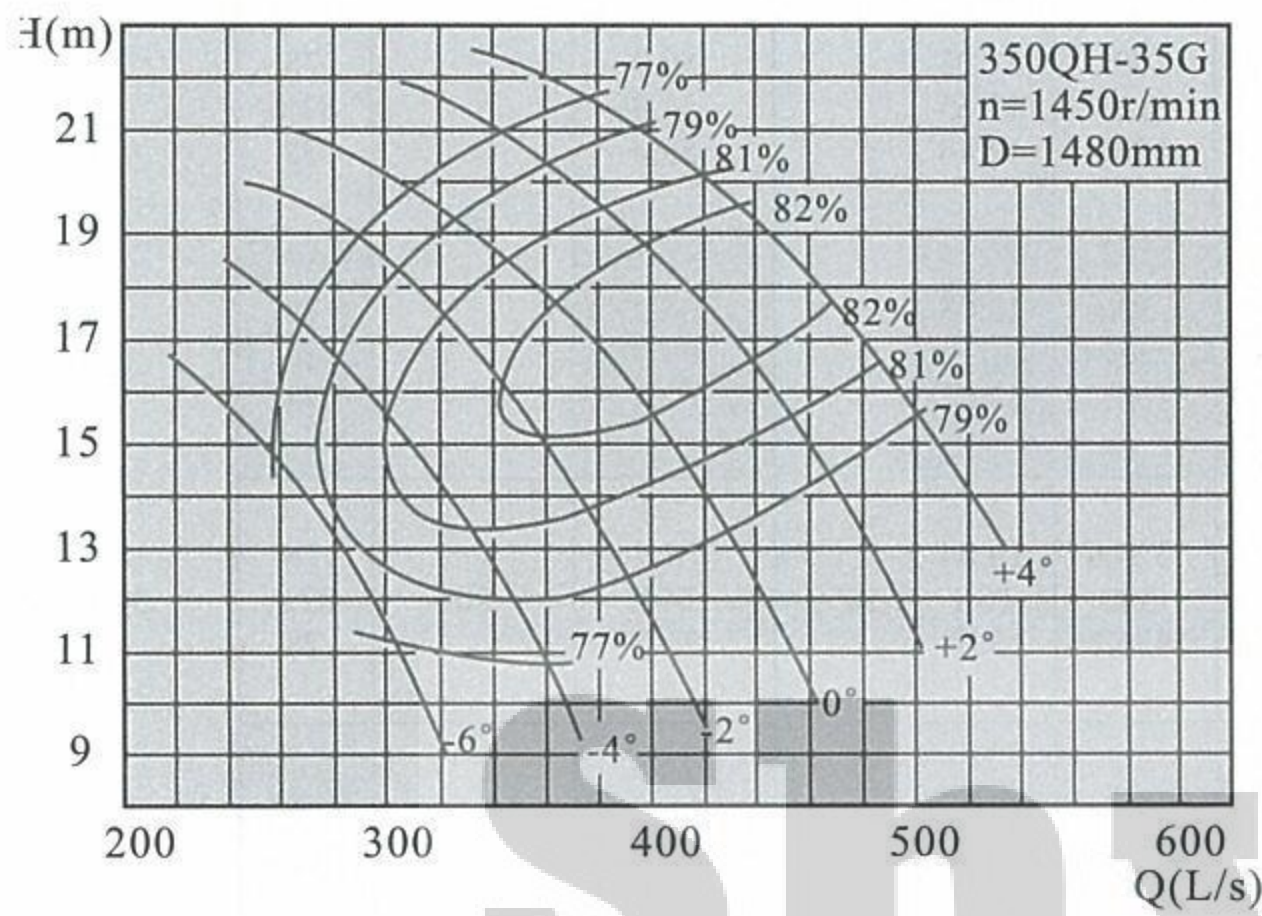


叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	929.5	258.2	14.65	1450	48.2	55	77	300
	1044	290	12.6		45.7		78.4	
	1099.8	305.5	11.05		43		77	
-4°	961.6	267.1	17.2		58.5	75	77	
	1170	325	14		55		81.2	
	1255.7	348.8	11.9		51.5		79	
-2°	1049	291.4	18.9		70.2	90	77	
	1296	360	15.2		65.3		82.2	
	1413.7	392.7	12.3		60		79	
0°	1118.9	310.8	19.8		78.4	90	77	
	1404	390	16.32		75.7		82.5	
	1548	430	13.25		70.7		79	
+2°	1241.6	344.9	20.87	91.7	110	77		
	1512	420	17.73	87.9		83.1		
	1685.2	468.1	14.38	83.6		79		
+4°	1350.4	375.1	21.51	102.8	110	77		
	1620	450	18.5	99		82.5		
	1804	501.1	15.47	96.3		79		

350QH-35D

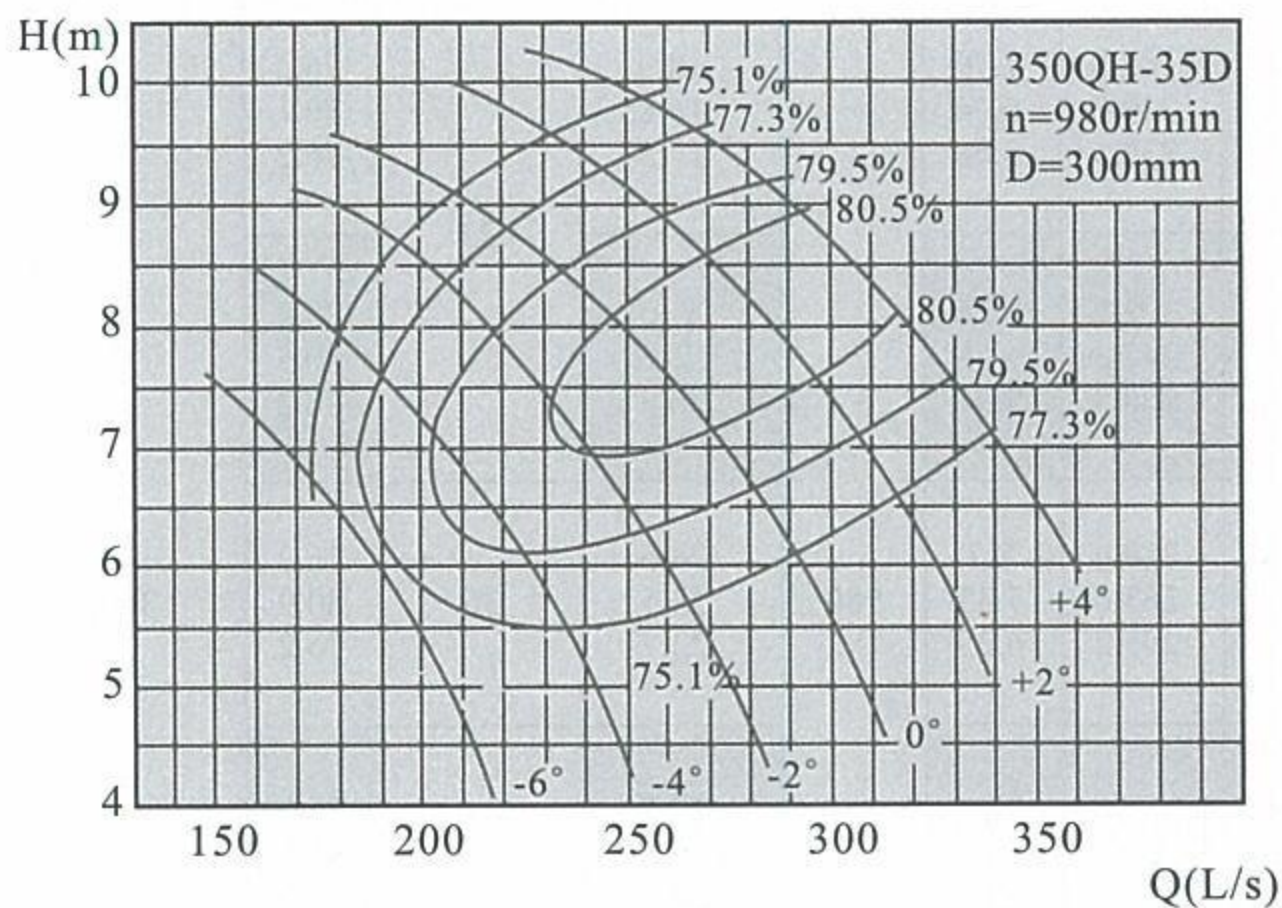

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	628.2	174.5	6.69	980	15.2	18.5	75.1	300
	705.6	196	5.76		14.4		76.7	
	743.3	206.5	5.05		13.6		75.1	
-4°	649.9	180.5	7.86		18.5	22	75.1	
	790.8	219.7	6.4		17.3		79.6	
	848.7	235.7	5.44		16.3		77.3	
-2°	709	196.9	8.63		22.2	30	75.1	
	875.9	243.3	6.94		20.5		80.7	
	955.5	265.4	5.62		18.9		77.3	
0°	756.2	210.1	9.04		24.8	30	75.1	
	948.9	263.6	7.45		23.8		81.1	
	1046.2	290.6	6.05		22.3		77.3	
+2°	839.2	233.1	9.53	29	37	75.1		
	1021.9	283.9	8.1	27.6		81.7		
	1138.9	316.4	6.57	26.4		77.3		
+4°	912.7	253.5	9.83	32.5	37	75.1		
	1094.9	304.1	8.45	31.1		81		
	1219.2	338.7	7.07	30.4		77.3		


350QH-40G

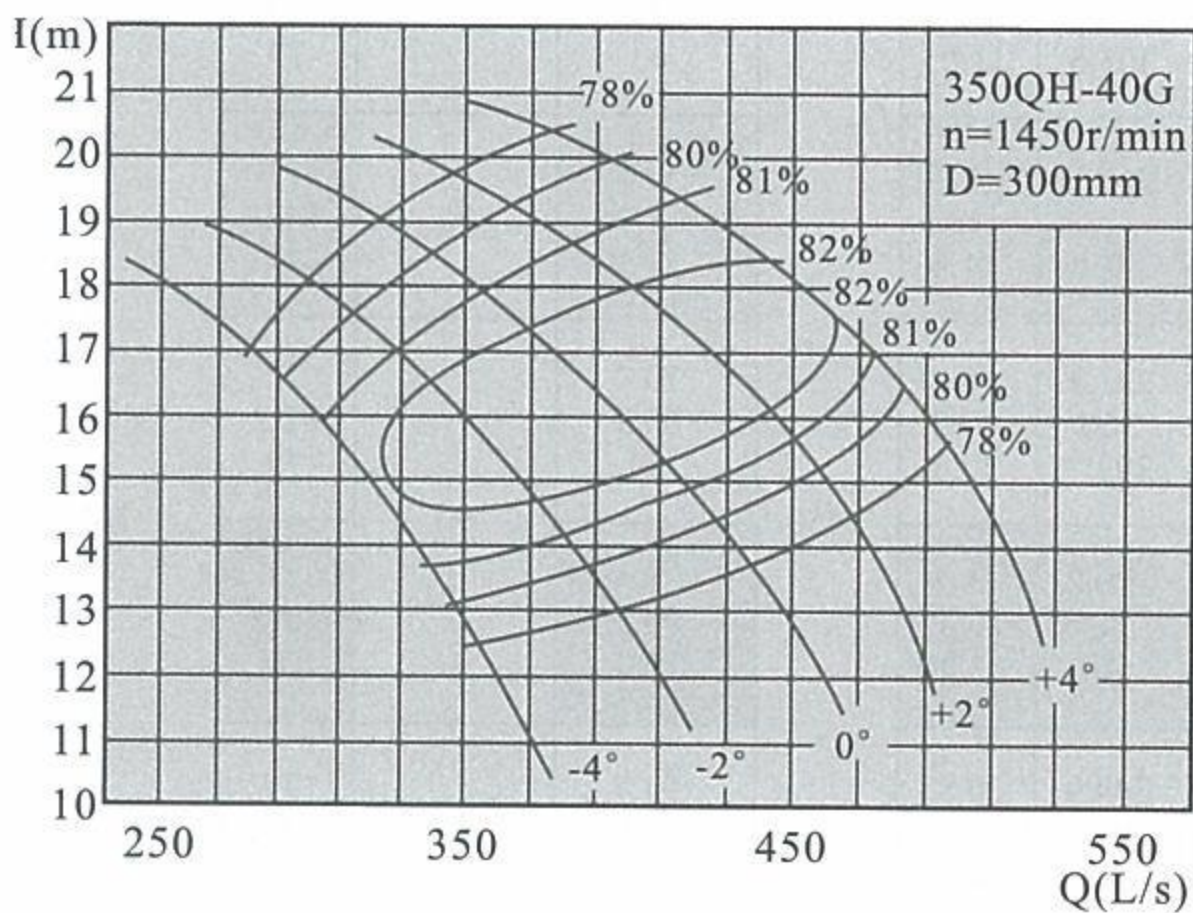

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	1005.5	279.3	17.05	1450	59.9	75	78	300	
	1170	325	13.65						
	1275.8	354.4	12.44						
-2°	1079.9	300	18.08		68.2		82		78
	1296	360	14.8						
	1430.3	397.3	13.01						
0°	1168.6	324.6	19.04		77.7	90	78		
	1404	390	16.1						
	1572.6	436.8	13.68						
+2°	1243	345.3	19.72		85.6	110	78		
	1512	420	17.2						
	1683.3	467.6	14.42						
+4°	1352.2	375.6	20.39	96.3	82.5		78		
	1620	450	18.2						
	1785.5	496	15.59						




350QH-40D

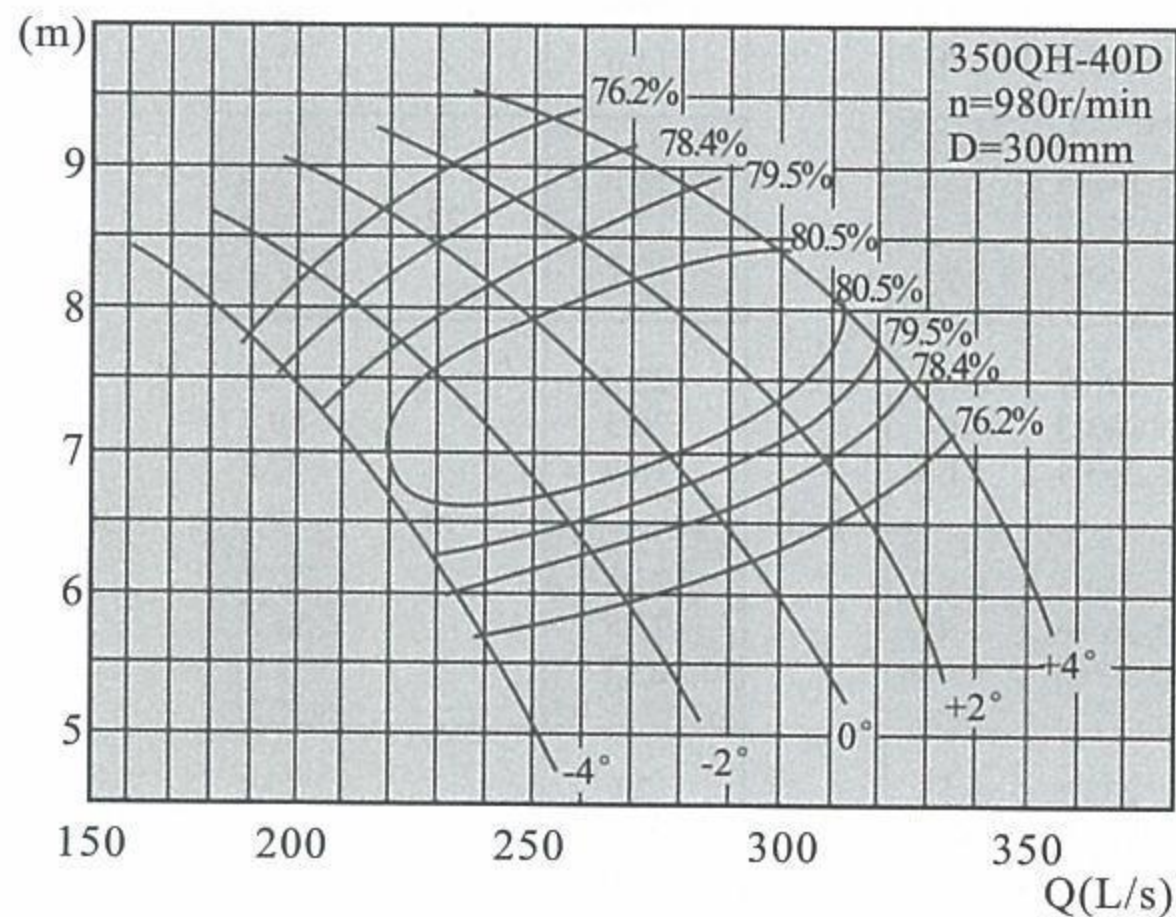

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	679.6	188.8	7.79	980	18.9	22	76.2	300	
	790.8	219.7	6.24						
	862.3	239.5	5.68						
-2°	729.8	202.7	8.26		21.6		80.5		76.2
	875.9	243.3	6.76						
	966.7	268.5	5.94						
0°	789.8	219.4	8.7		24.6	30	76.2		
	948.9	263.6	7.35						
	1062.9	295.2	6.25						
+2°	840.1	233.4	9.01		27.1	37	76.2		
	1021.9	283.9	7.86						
	1137.7	316	6.59						
+4°	913.9	253.9	9.31	30.4	81.1		76.2		
	1094.9	304.1	8.31						
	1206.7	335.2	7.12						


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

350QH-72G

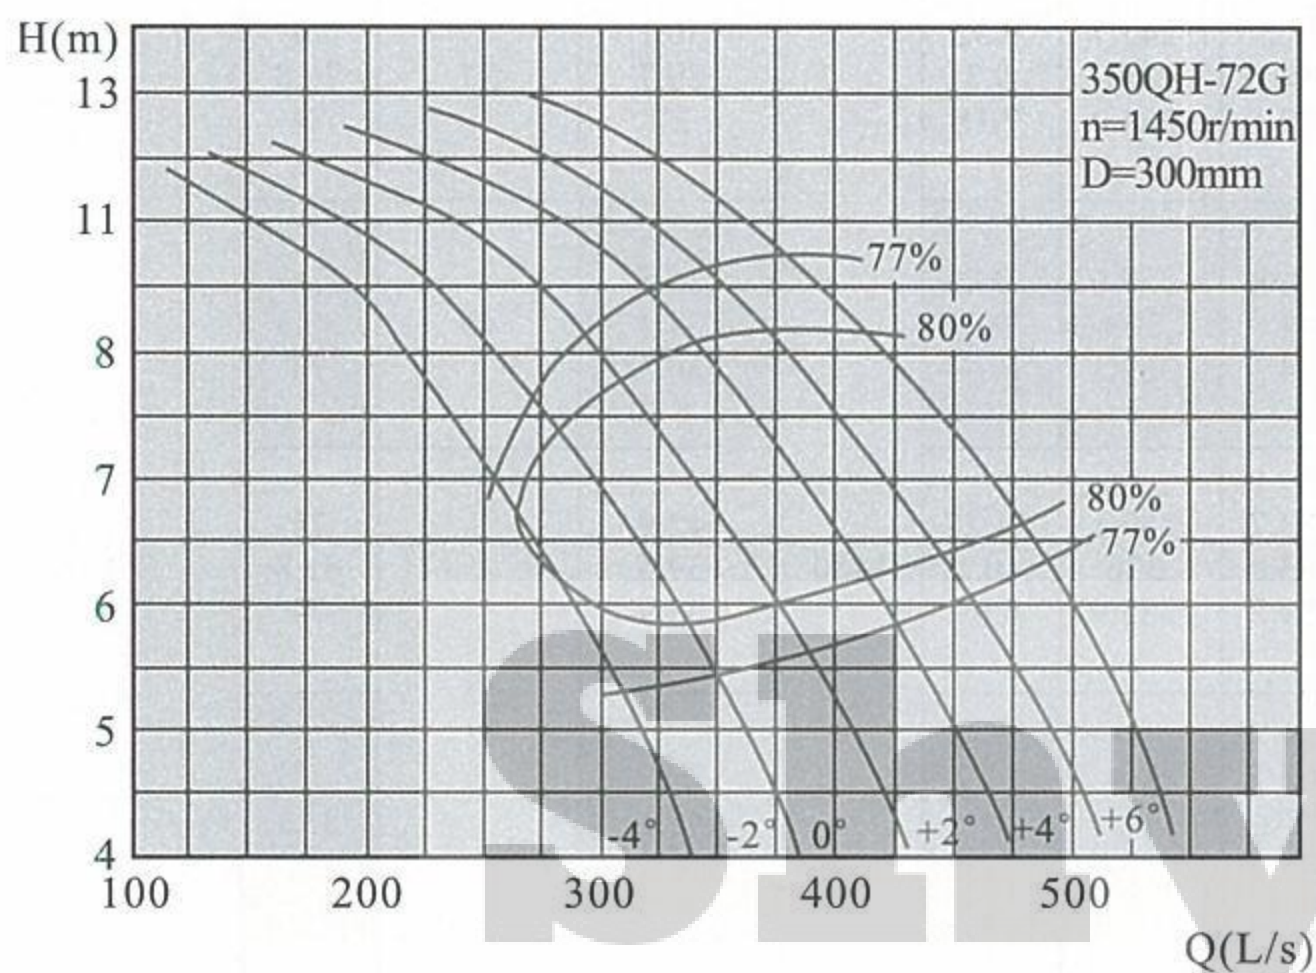


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	817.2	227	8.3	1450	24	30	77	300	
	936	260	6.3		20.1		80		
	964.8	268	5.84		19.2		80.2		
	968.4	269	5.75		19		80		
	1072.8	298	3.9		14.8	77			
-2°	896.4	249	9		28.6	37	77		
	975.6	271	7.95		26.4		80		
	1076.4	299	6.34		22.8		81.5		
	1184.4	329	4.6		18.6		80		
	1227.6	341	3.7		16.1	77			
0°	1018.8	283	9.4		33.9	45	77		
	1101.6	306	8.34		31.3		80		
	1238.4	344	6.28	25.9	81.8				
	1317.6	366	5	22.4	80				
	1364.4	379	4.1	19.8	77				
+2°	1108.8	308	10.01	39.3	55	77			
	1173.6	326	9.3	37.2		80			
	1328.4	369	7.2	31.7		82.3			
	1472.4	409	5	25.1		80			
	1530	425	4.2	22.7	77				
+4°	1209.6	336	10.35	44.3	77	77			
	1296	360	9.46	41.8		80			
	1454.4	404	7.38	35.7		81.8			
	1584	440	5.5	29.7		80			
	1656	460	4.5	26.4	77				
+6°	1332	370	10.5	49.5	80	77			
	1440	400	9.2	45.1		80			
	1544.4	429	8.14	42.1		81.4			
	1692	470	6.2	35.7		80			
	1728	480	5.6	34.2	77				

350QH-72D

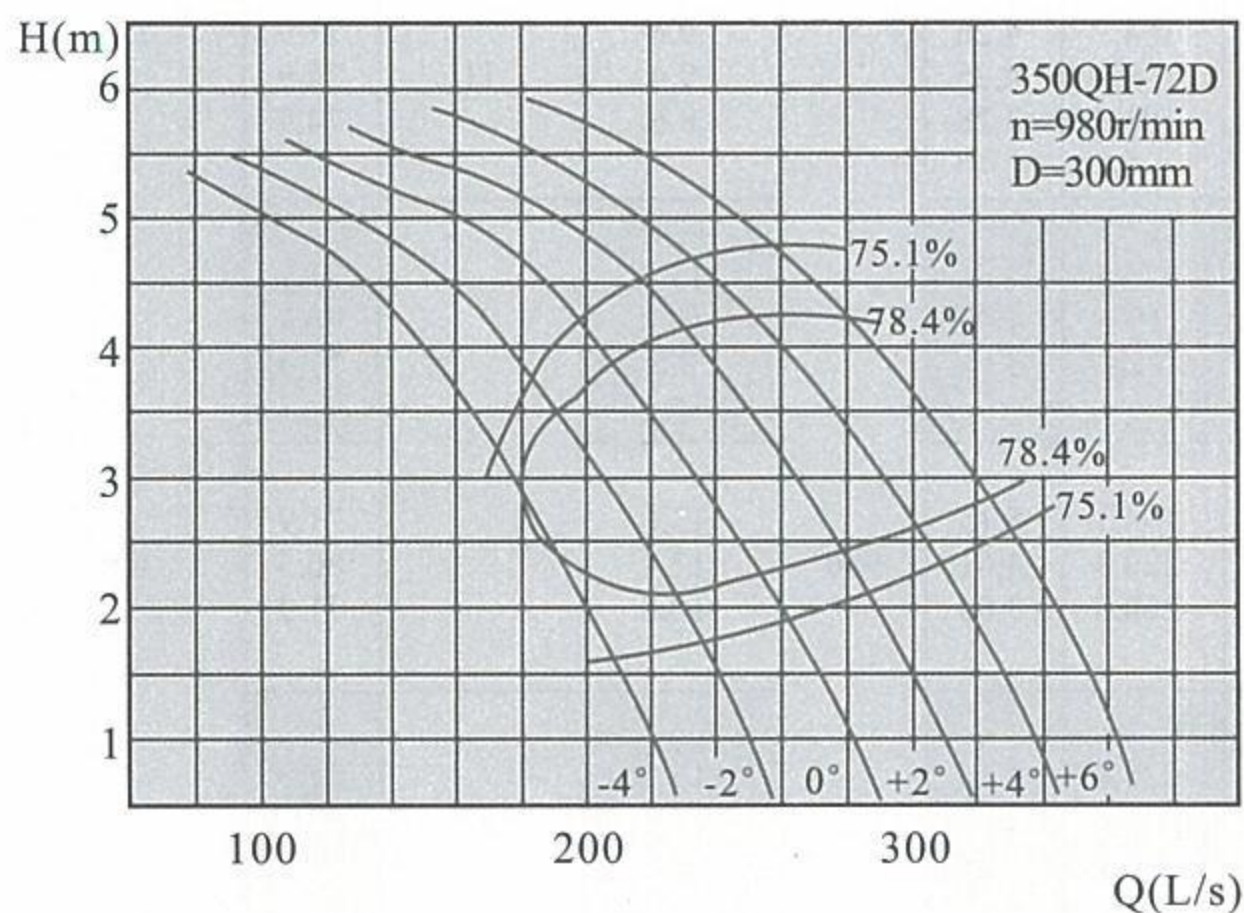


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	552.3	153.4	3.79	980	7.6	11	75.1	300	
	632.6	175.7	2.88		6.3		78.4		
	652.1	181.1	2.67		6		78.5		
	654.5	181.8	2.63		6		78.4		
	725.1	201.4	1.78		4.7	75.1			
-2°	605.8	168.3	4.11		9	15	75.1		
	659.4	183.2	3.63		8.3		78.4		
	727.5	202.1	2.9		7.2		79.9		
	800.5	222.4	2.1		5.8		78.4		
	829.7	230.5	1.69		5.1	75.1			
0°	688.6	191.3	4.29		10.7	18.5	75.1		
	744.5	206.8	3.81		9.9		78.4		
	837	232.5	2.87	8.1	80.3				
	890.5	247.4	2.28	7.1	78.4				
	922.1	256.2	1.87	6.3	75.1				
+2°	749.4	208.2	4.57	12.4	75.1	75.1			
	793.2	220.3	4.25	11.7		78.4			
	897.8	249.4	3.29	10		80.9			
	995.1	276.4	2.28	7.9		78.4			
	1034.1	287.2	1.92	7.2	75.1				
+4°	817.5	227.1	4.73	14	75.1	75.1			
	875.9	243.3	4.32	13.2		78.4			
	983	273	3.37	11.2		80.3			
	1070.6	297.4	2.51	9.4		78.4			
	1119.2	310.9	2.06	8.3	75.1				
+6°	900.2	250.1	4.8	15.7	75.1	75.1			
	973.2	270.3	4.2	14.2		78.4			


50QZ-50G

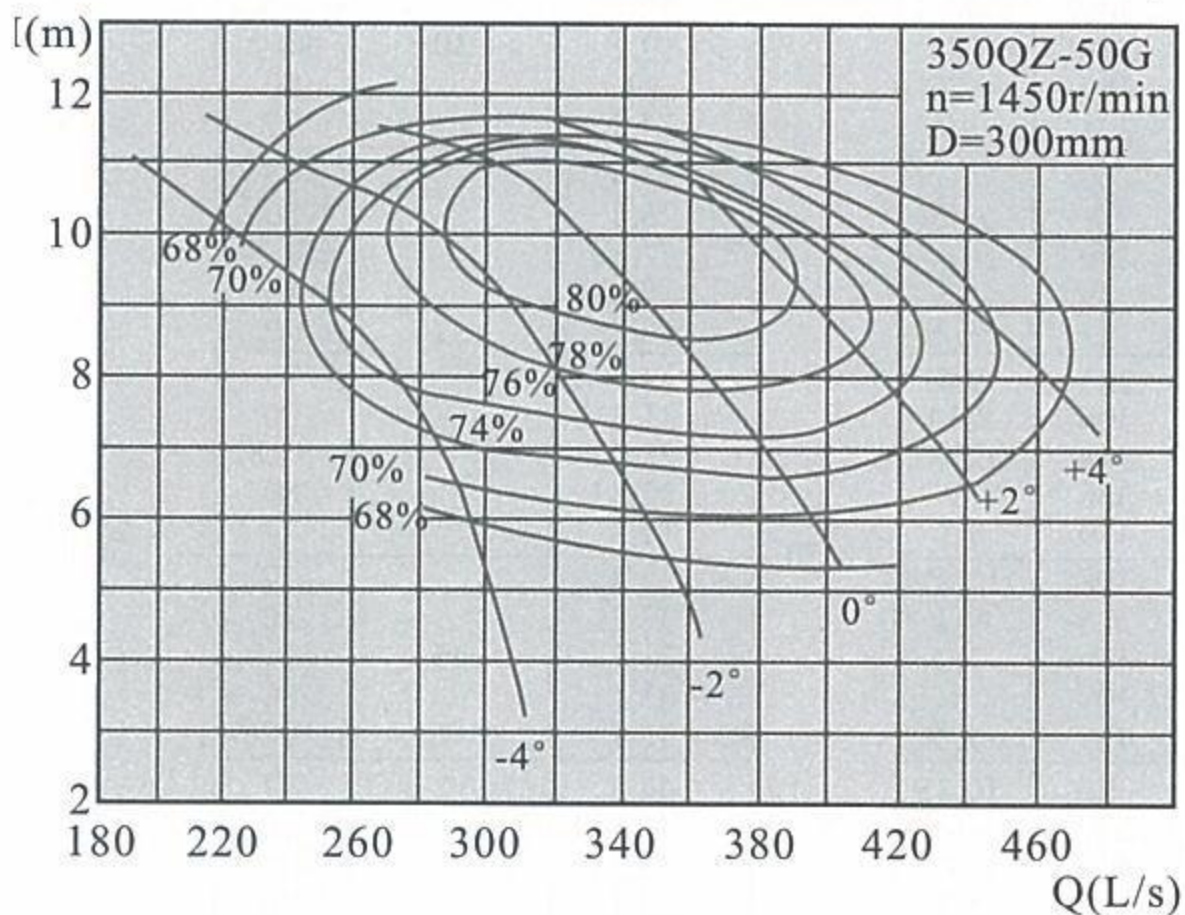

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)			
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power					
-4°	877.2	243.7	9.32	1450	30.1	37	74	300			
	900	250	9.3		29.7		76.8				
	1022.1	283.9	7.18		27		74				
-2°	934.6	259.6	10.69		36.8	45	74				
	1054.8	293	9.6		34.4		80.3				
	1214.3	337.3	6.77		30.3		74				
0°	1033.7	287.1	11.27		42.9	55	74				
	1173.6	326	10.1		39.5		81.8				
	1389.2	385.9	6.63		33.9		74				
+2°	1202.5	334	11.3		50		75			74	
	1350	375	10		45.1					81.5	
	1545.1	429.2	7.19		40.9					74	
+4°	1332.1	370	11.15	54.7	75	74					
	1483.2	412	9.78	51.2		77.2					
	1606	446.1	8.74	51.7		74					

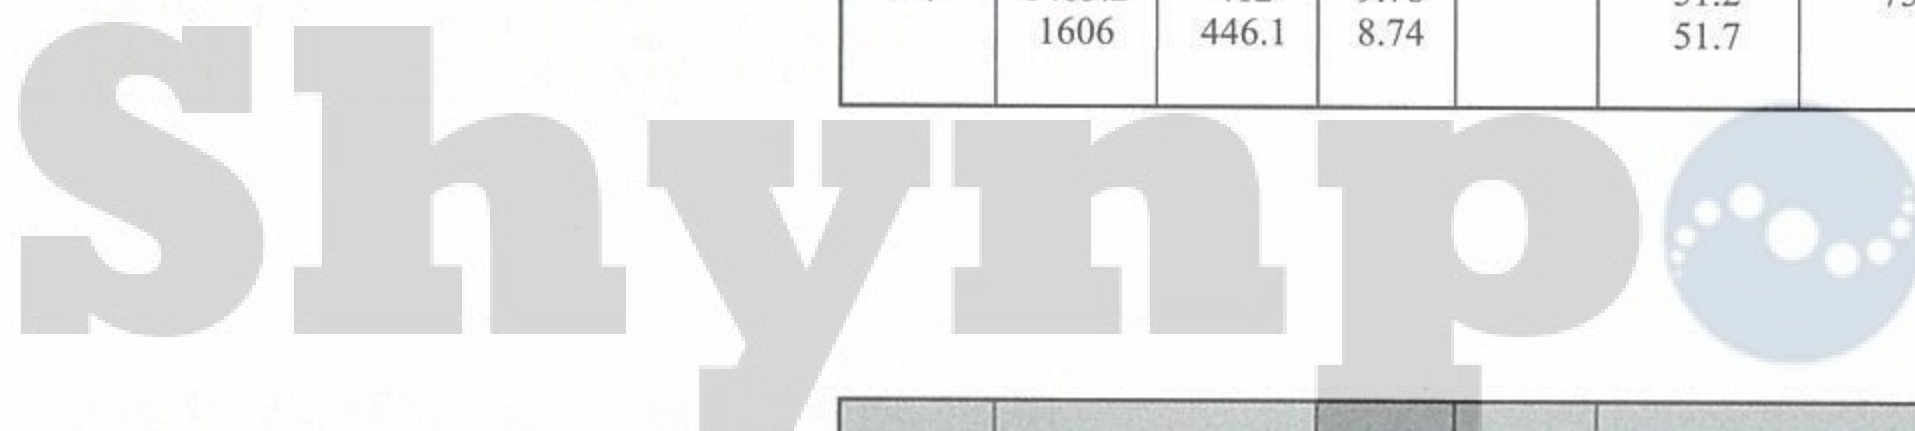


50QZ-50D

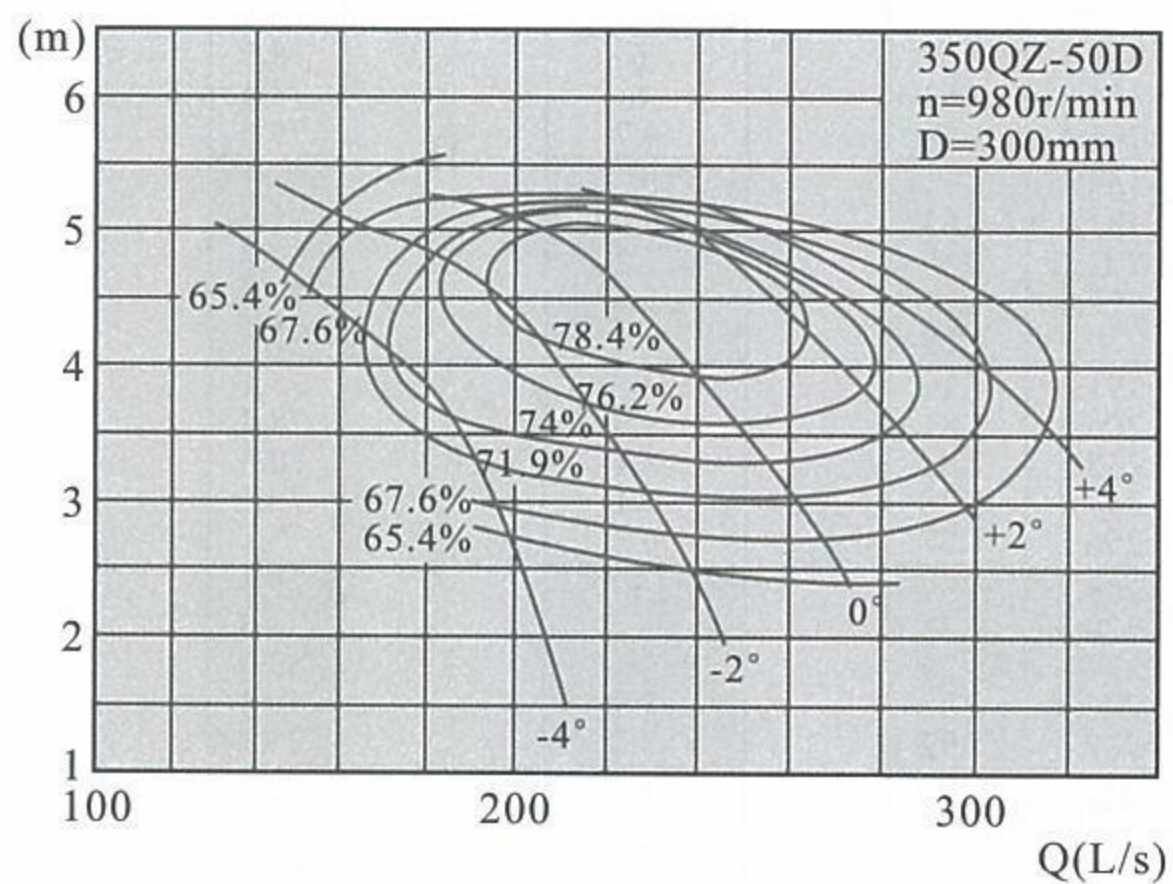

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)			
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power					
-4°	592.8	164.7	4.26	980	9.6	11	71.9	300			
	608.3	169	4.25		9.4		74.9				
	690.8	191.9	3.28		8.6		74.9				
-2°	631.7	175.5	4.88		11.7	15	71.9				
	712.9	198	4.39		10.8		78.7				
	820.7	228	3.09		9.6		71.9				
0°	698.6	194.1	5.15		13.6	18.5	71.9				
	793.2	220.3	4.61		12.4		80.3				
	938.9	260.8	3.03		10.8		71.9				
+2°	812.8	225.8	5.16		15.9		22			71.9	
	912.4	253.4	4.57		14.2					80	
	1044.3	290.1	3.28		13					71.9	
+4°	900.3	250.1	5.09	17.4	22	71.9					
	1002.4	278.5	4.47	16.2		75.3					
	1085.4	301.5	3.99	16.4		71.9					


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

350QZ-75G

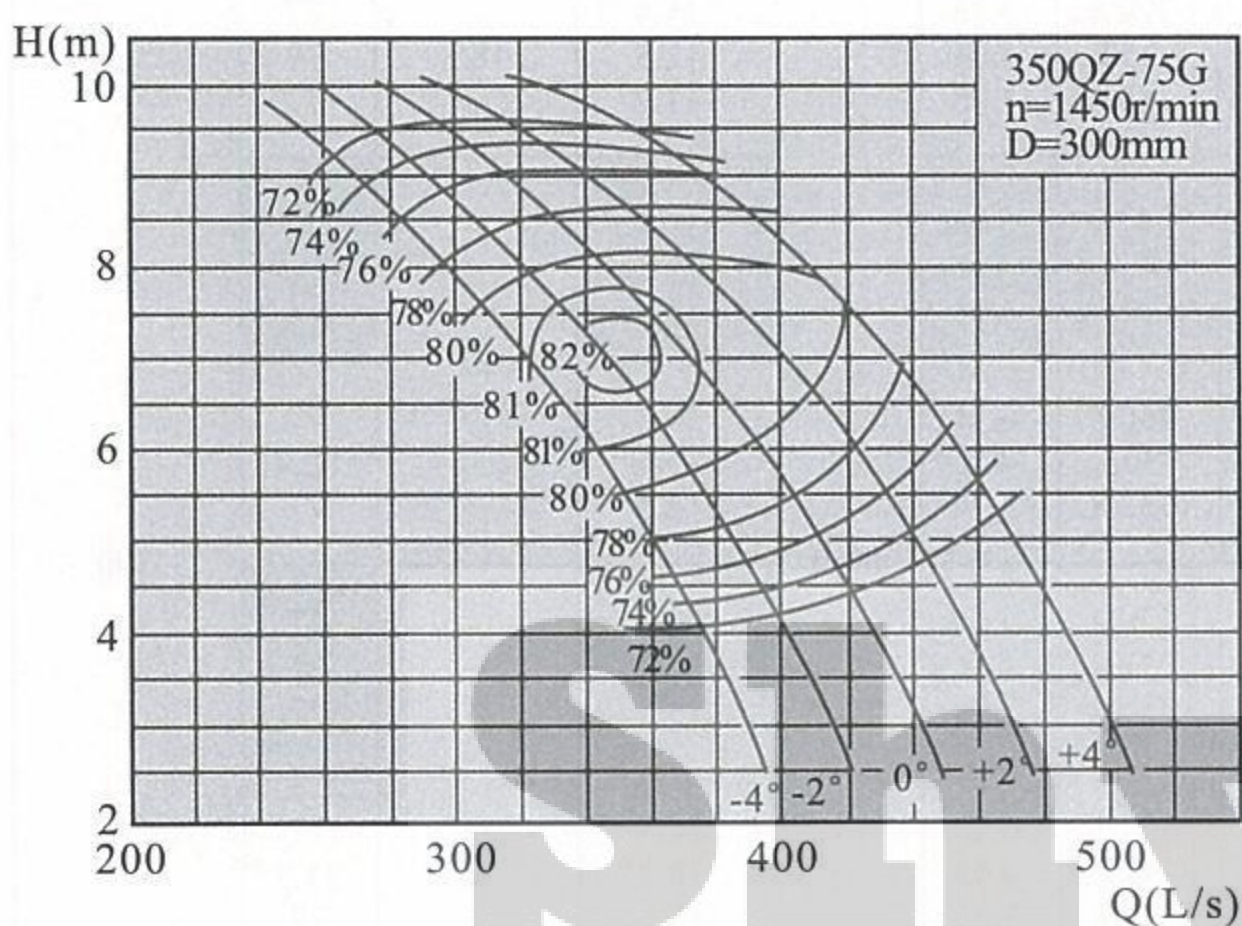


叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	转速 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1071.9	297.7	8.1	1450	30.3	37	78	300
	1221.8	339.4	6.34					
	1309	363.6	5.03					
-2°	1108	307.8	8.4		32.5		78	
	1275.5	354.3	6.78					
	1386.4	385.1	5.2					
0°	1192.1	331.1	8.61		35.9	45	78	
	1335.2	370.9	7.04					
	1454.9	404.1	5.53					
+2°	1282.6	356.3	8.69		38.9		78	
	1428.8	396.9	7.19					
	1537.1	427	6.16					
+4°	1416.9	393.6	8.68		43	55	78	
	1495.1	415.3	7.62					
	1574.9	437.5	6.85					

350QZ-75D

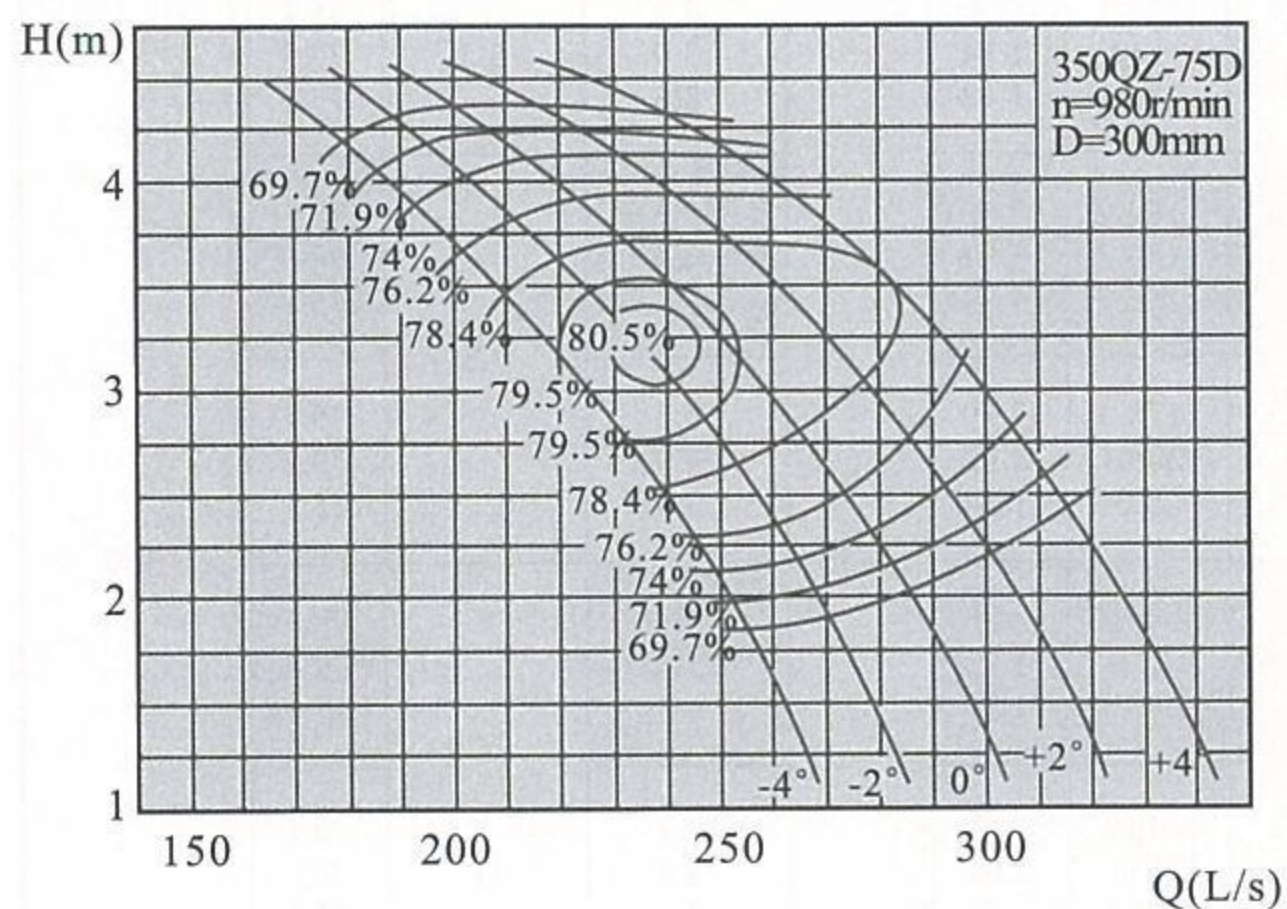


叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	转速 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	724.4	201.2	3.7	980	9.6	11	76.2	300
	825.8	229.4	2.9					
	884.7	245.7	2.3					
-2°	748.9	208	3.84		10.3		76.2	
	862	239.5	3.1					
	937	260.3	2.38					
0°	805.7	223.8	3.93		11.3	15	76.2	
	902.4	250.7	3.22					
	983.3	273.1	2.53					
+2°	866.9	240.8	3.97		12.3		76.2	
	965.7	268.2	3.28					
	1038.9	288.6	2.81					
	957.6	266	3.96		13.6	76.2		

50QZ-100G

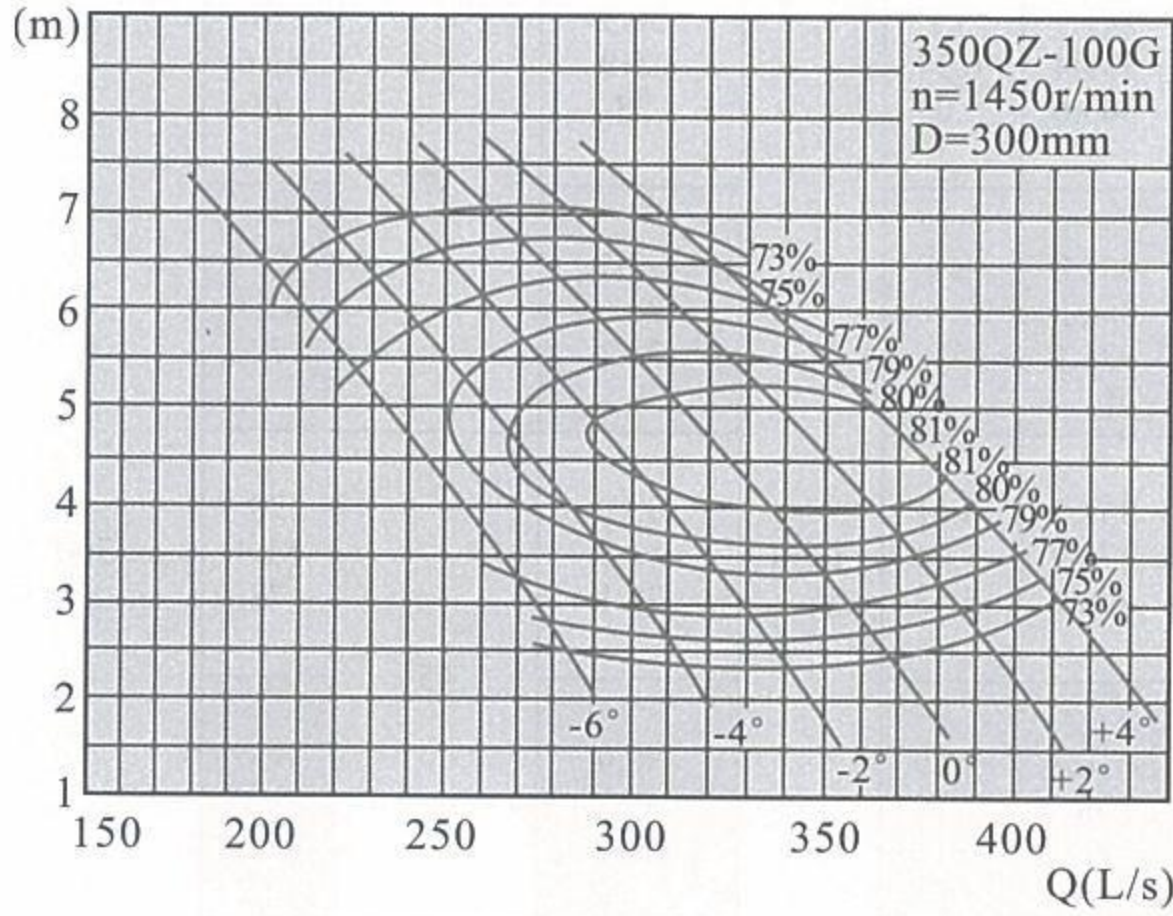

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	826.2	229.5	5.26	1450	15.4	18.5	77	300
	900	250	4.03		12.5		79	
	969.8	269.4	3.25		11.2		77	
-4°	877.1	243.6	5.83		18.1	22	77	
	1008	280	4.1		14.1		80.1	
	1100.8	305.8	2.91		11.3		77	
-2°	938.8	260.8	6.11		20.3	30	77	
	1098	305	4.2		15.6		80.7	
	1198.2	332.8	2.94		12.5		77	
0°	1005.8	279.4	6.25		22.2	30	77	
	1188	330	4.21		16.8		81	
	1284.3	356.7	2.98		13.5		77	
+2°	1098.2	305.1	6.28	24.4	30	77		
	1260	350	4.43	18.7		81.5		
	1360.1	377.8	3.22	15.5		77		
+4°	1200.4	333.4	6.06	25.7	30	77		
	1350	375	4.45	20.2		81.2		
	1432.2	397.8	3.52	17.8		77		


50QZ-100D

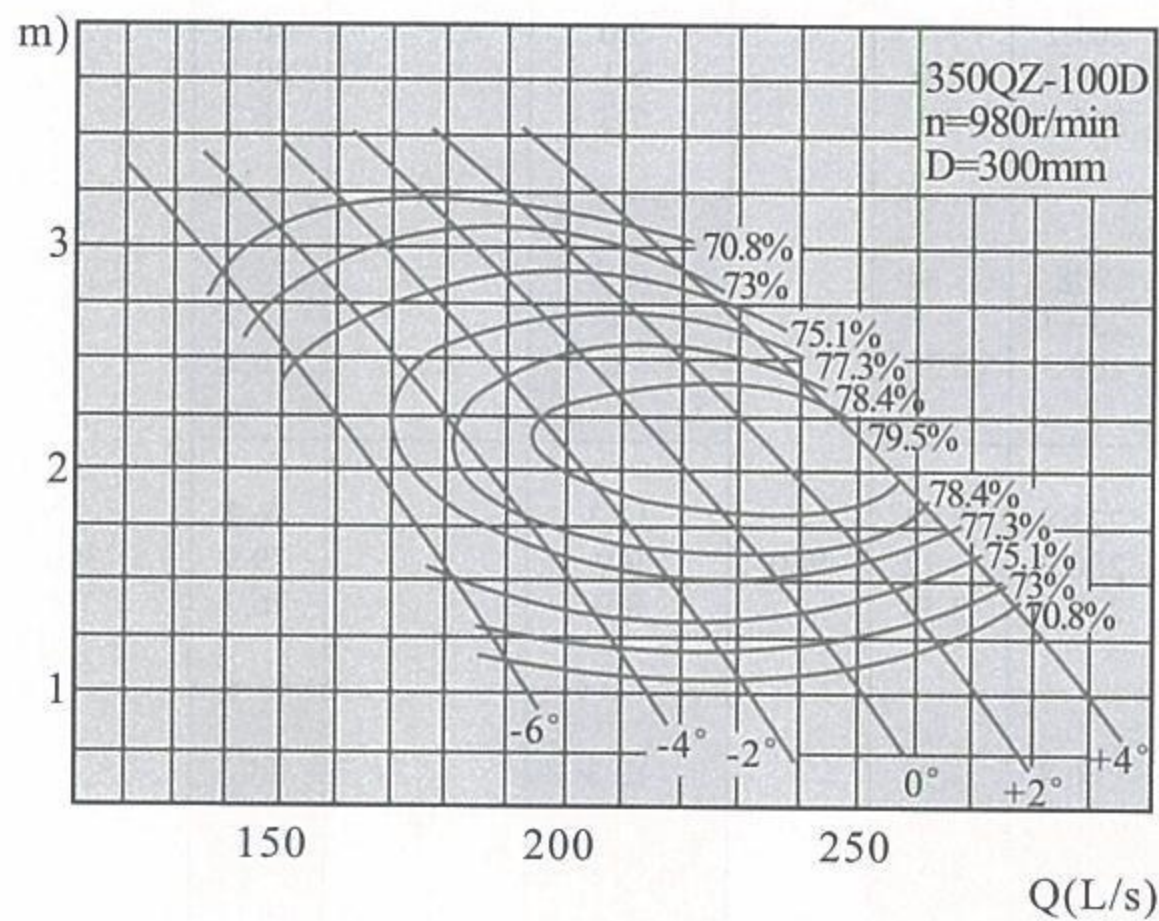

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	558.4	155.1	2.4	1450	4.9	5.5	75.1	300
	608.3	169	1.84		3.9		77.3	
	655.5	182.1	1.48		3.5		75.1	
-4°	592.8	164.7	2.66		5.7	7.5	75.1	
	681.3	189.2	1.87		4.4		78.5	
	744	206.7	1.33		3.6		75.1	
-2°	634.5	176.3	2.79		6.4	11	75.1	
	742.1	206.1	1.92		4.9		79.1	
	809.8	225	1.34		3.9		75.1	
0°	679.8	188.8	2.85		7	11	75.1	
	802.9	223	1.92		5.3		79.5	
	868	241.1	1.36		4.3		75.1	
+2°	742.2	206.2	2.87	7.7	11	75.1		
	851.6	236.6	2.02	5.9		80		
	919.3	255.3	1.47	4.9		75.1		
+4°	811.3	225.4	2.77	8.1	11	75.1		
	912.4	253.4	2.03	6.3		79.7		
	967.9	268.9	1.61	5.6		75.1		


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

350QZ-135G

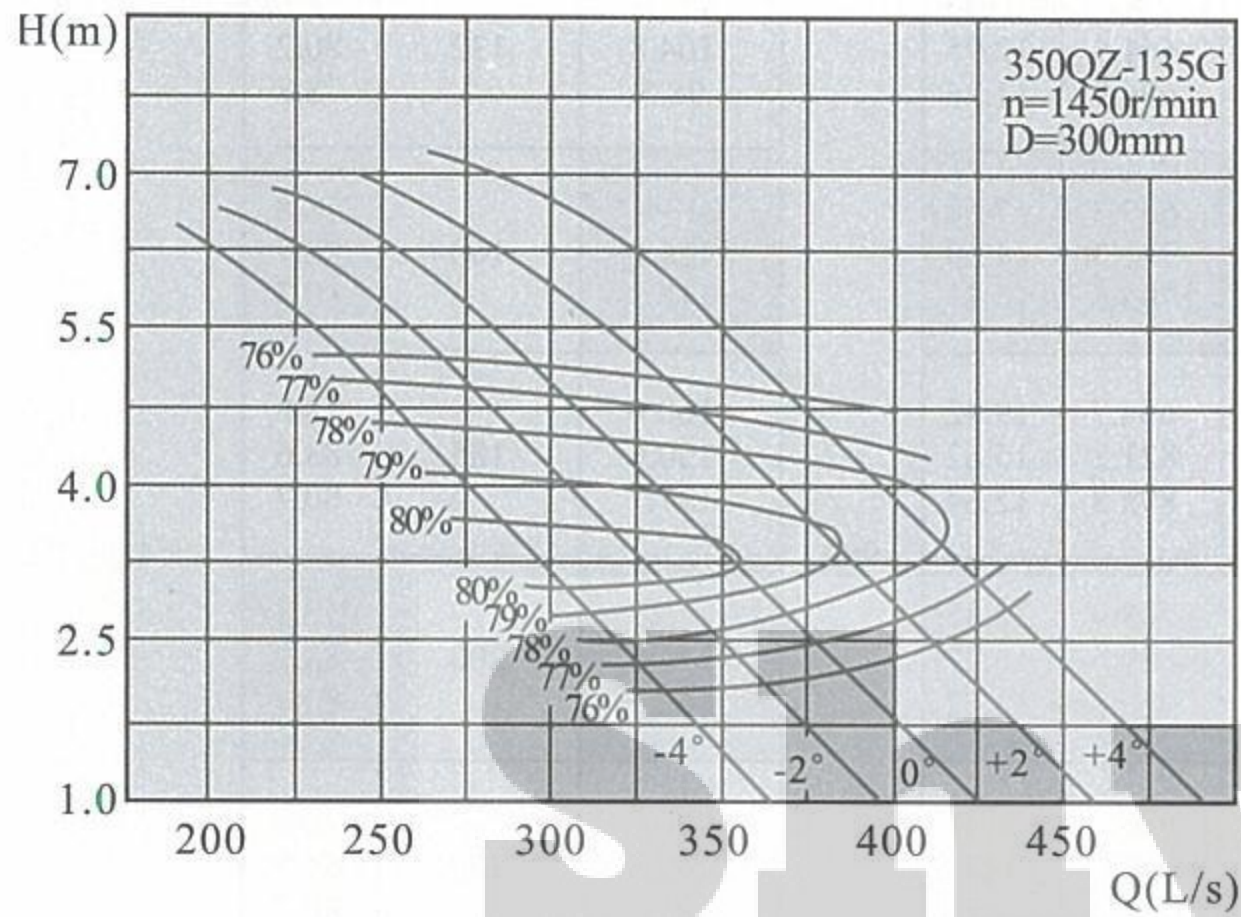


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	864.4	240.1	5.22	1450	16.2	18.5	76	300
	1116.7	310.2	2.88		10.8		80.8	
	1196.9	332.5	2.07		8.9		76	
-2°	964.2	267.8	5.17		17.9	22	76	
	1200.6	333.5	3.08		12.5		80.5	
	1300.2	361.2	2.19		10.2		76	
0°	1064.7	295.7	5.12		19.5	30	76	
	1280.2	355.6	3.25		14.2		80.1	
	1390.3	386.2	2.24		11.2		76	
+2°	1211.7	336.6	4.84		21	30	76	
	1379.2	383.1	3.37		16		79.3	
	1484.9	412.5	2.47		13.2		76	
+4°	1334.4	370.7	4.87	23.3		76		
	1476.4	410.1	3.55	18.2		78.5		
	1563.6	434.3	2.85	16		76		

350QZ-135D

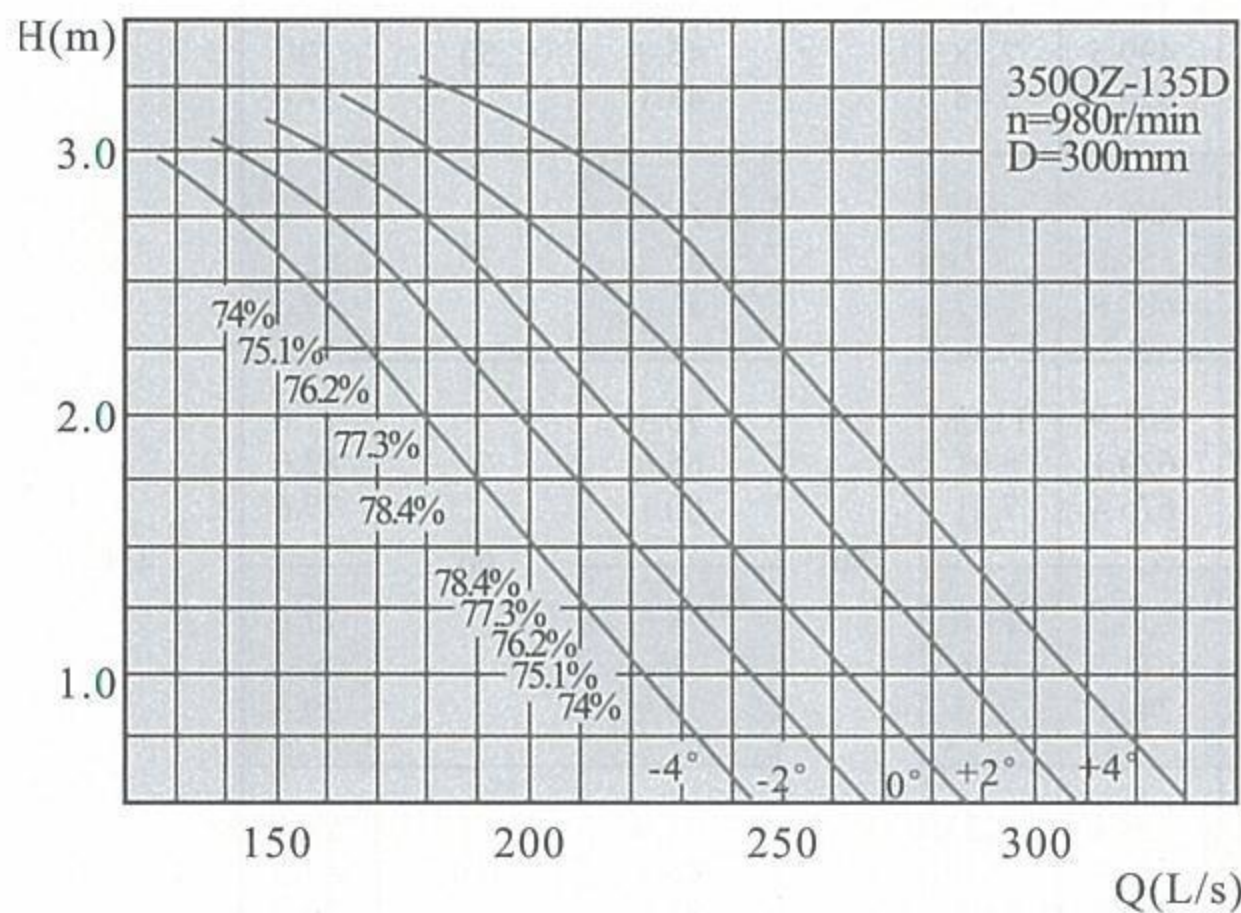


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	584.2	162.3	2.38	980	5.1	5.5	74	300
	754.7	209.7	1.32		3.4		79.2	
	808.9	224.7	0.95		2.8		74	
-2°	651.7	181	2.36		5.7	7.5	74	
	811.4	225.4	1.41		3.9		78.9	
	878.7	244.1	1		3.2		74	
0°	719.6	199.9	2.34		6.2	7.5	74	
	865.2	240.3	1.48		4.5		78.5	
	939.7	261	1.02		3.5		74	
+2°	818.9	227.5	2.21		6.7		74	
	932.1	258.9	1.54		5		77.6	
	1003.6	278.8	1.13		4.2		74	
+4°	901.9	250.5	2.22	7.4		74		
	997.8	277.2	1.62	5.7		77.7		
	1077.2	299.2	1.22	4.2		74		

00QH-35G

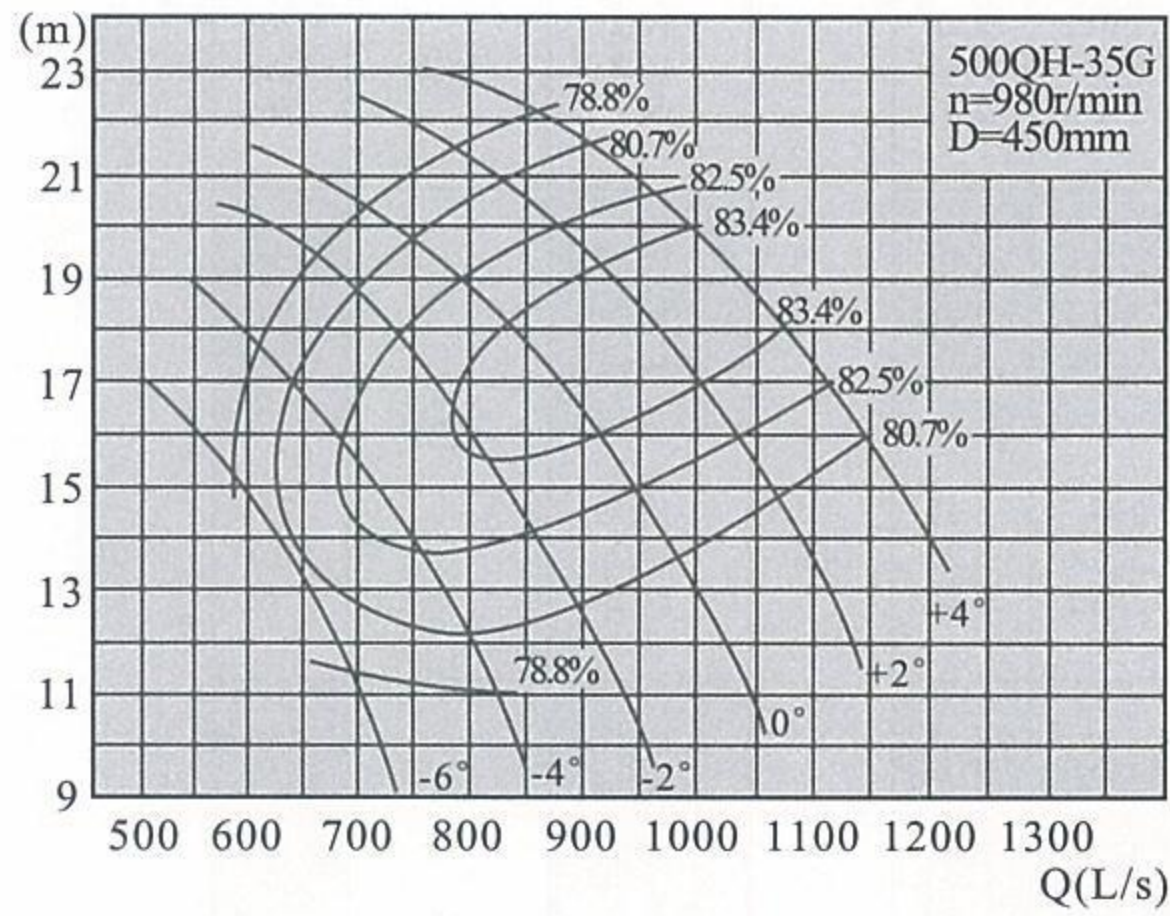

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)	
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-6°	2120.3	589	15.06	980	110.3	132	78.8	450	
	2381.4	661.5	12.95		104.8		80.2		
	2508.7	696.9	11.36		98.5		78.8		
-4°	2193.4	609.3	17.68		134	160	78.8		
	2668.8	741.3	14.39		126.6		82.7		
	2864.2	795.6	12.23		118.3		80.7		
-2°	2392.9	664.7	19.42		160.6	185	78.8		
	2956.2	821.2	15.62		150.6		83.6		
	3224.7	895.8	12.64		137.7		80.7		
0°	2552.2	708.9	20.35		179.5	200	78.8		
	3202.6	889.6	16.77		174.5		83.9		
	3531	980.8	13.62		162.4		80.7		
+2°	2832.2	786.7	21.45	210	250	78.8			
	3448.9	958	18.22	202.8		84.5			
	3843.9	1067.8	14.78	191.9		80.7			
+4°	3080.2	855.6	22.11	235.3	280	78.8			
	3695.3	1026.5	19.01	228.3		83.9			
	4114.9	1143	15.9	221		80.7			


00QH-35D

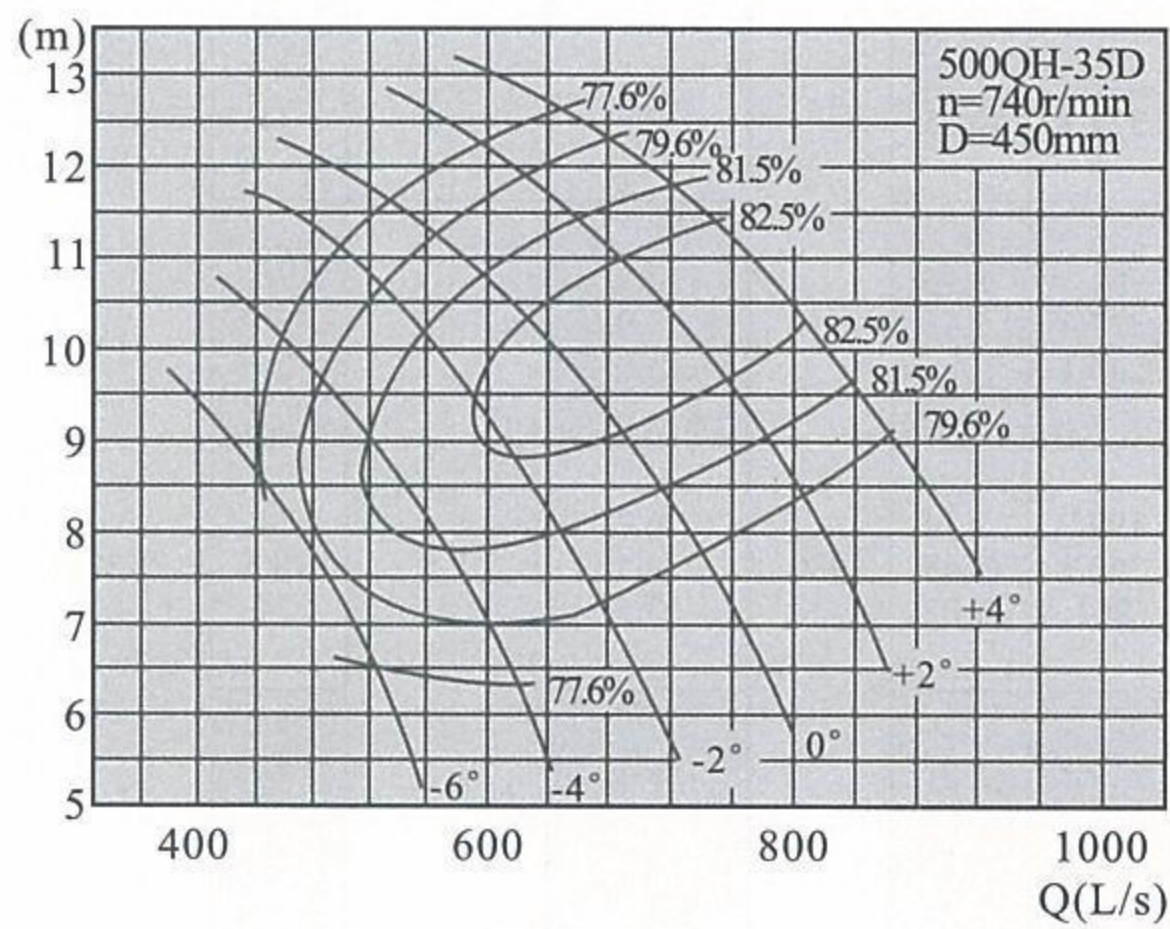

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	速转 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)	
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-6°	1601	444.7	8.59	740	48.2	55	77.6	450	
	1798.2	499.5	7.38		45.8		79		
	1894.3	526.2	6.48		43.1		77.6		
-4°	1656.2	460.1	10.08		58.6	75	77.6		
	2015.2	559.8	8.2		55.2		81.7		
	2162.8	600.8	6.97		51.7		79.6		
-2°	1806.9	501.9	11.08		70.3	90	77.6		
	2232.2	620.1	8.91		65.6		82.6		
	2435	676.4	7.21		60.1		79.6		
0°	1927.2	535.3	11.6		78.5		77.6		
	2418.3	671.7	9.56		76		83		
	2666.3	740.6	7.76		70.9		79.6		
+2°	2138.6	594.1	12.23	91.8	110	77.6			
	2604.3	723.4	10.39	88.2		83.6			
	2902.5	806.3	8.43	83.8		79.6			
+4°	2325.9	646.1	12.61	102.9	132	77.6			
	2790.3	775.1	10.84	99.4		82.9			
	3107.2	863.1	9.07	96.5		79.6			


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

500QH-40G

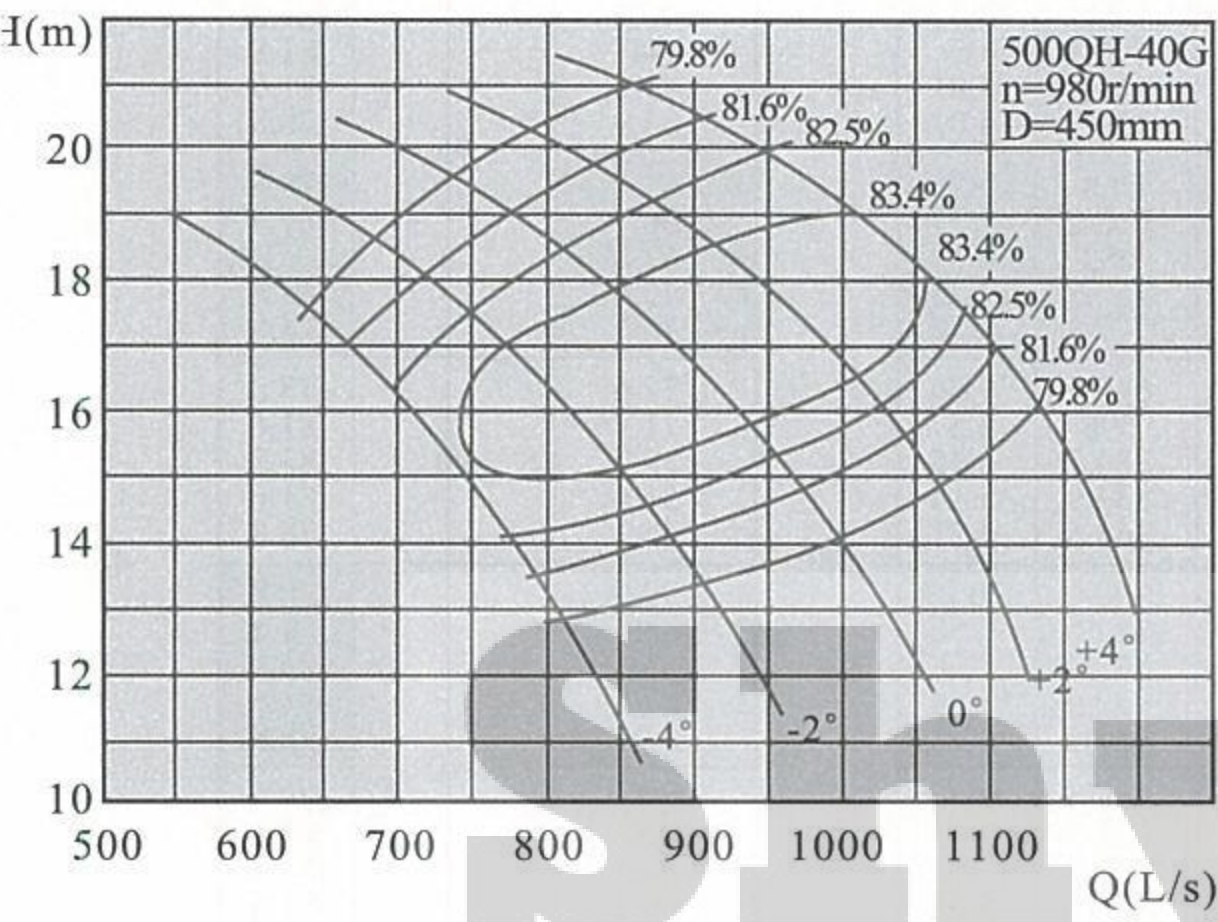


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	2293.5	637.1	17.52	980	137.3	160	79.8	450
	2668.8	741.3	14.03		122.8		83.1	
	2910.2	808.4	12.79		127.1		79.8	
-2°	2463.2	684.2	18.58		156.4	185	79.8	
	2956.2	821.2	15.21		146.8		83.4	
	3262.5	906.3	13.37		149		79.8	
0°	2665.6	740.4	19.57		178.2	200	79.8	
	3202.6	889.6	16.55		172.5		83.7	
	3587.2	996.4	14.06		172.3		79.8	
+2°	2835.4	787.6	20.27		196.3	220	79.8	
	3448.9	958	17.68		196.9		84.4	
	3839.7	1066.6	14.82		194.4		79.8	
+4°	3084.5	856.8	20.96	220.8	250	79.8		
	3695.3	1026.5	18.71	224.5		83.9		
	4072.7	1131.3	16.02	222.9		79.8		

500QH-40D

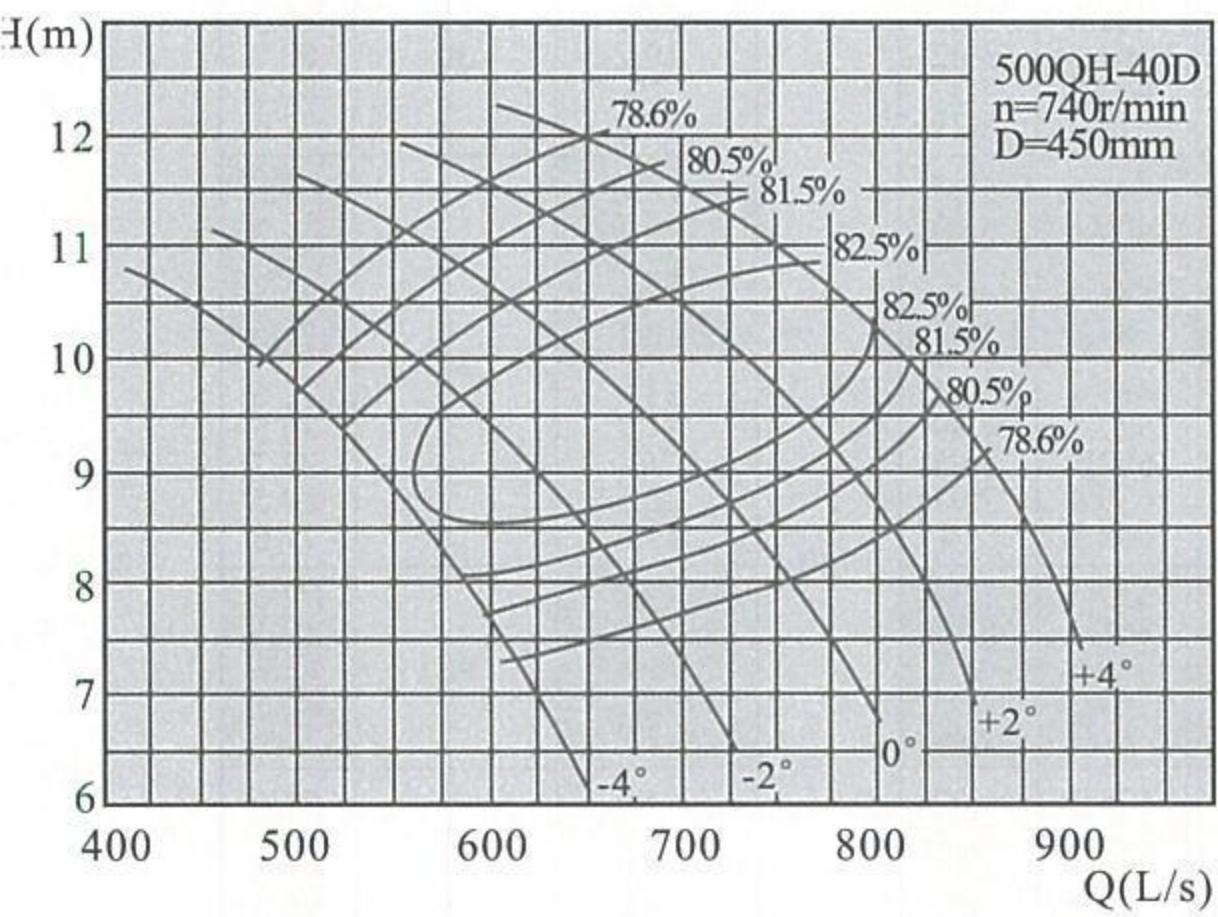


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1731.9	481.1	9.99	740	60	75	78.6	450
	2015.2	559.8	8		53.5		82.1	
	2197.5	610.4	7.29		55.5		78.6	
-2°	1860	516.7	10.6		68.3	90	78.6	
	2232.2	620.1	8.67		64		82.5	
	2463.5	684.3	7.62		65.1		78.6	
0°	2012.8	559.1	11.16		77.9	110	78.6	
	2418.3	671.7	9.43		75.1		82.8	
	2708.7	752.4	8.02		75.3		78.6	
+2°	2141	594.7	11.56		85.8	110	78.6	
	2604.3	723.4	10.08		85.7		83.5	
	2899.4	805.4	8.45		84.9		78.6	
+4°	2329.1	647	11.95	96.5	110	78.6		
	2700.0	750.0	10.00	96.5		83.5		
	2900.0	800.0	8.00	96.5		78.6		


500QH-72G

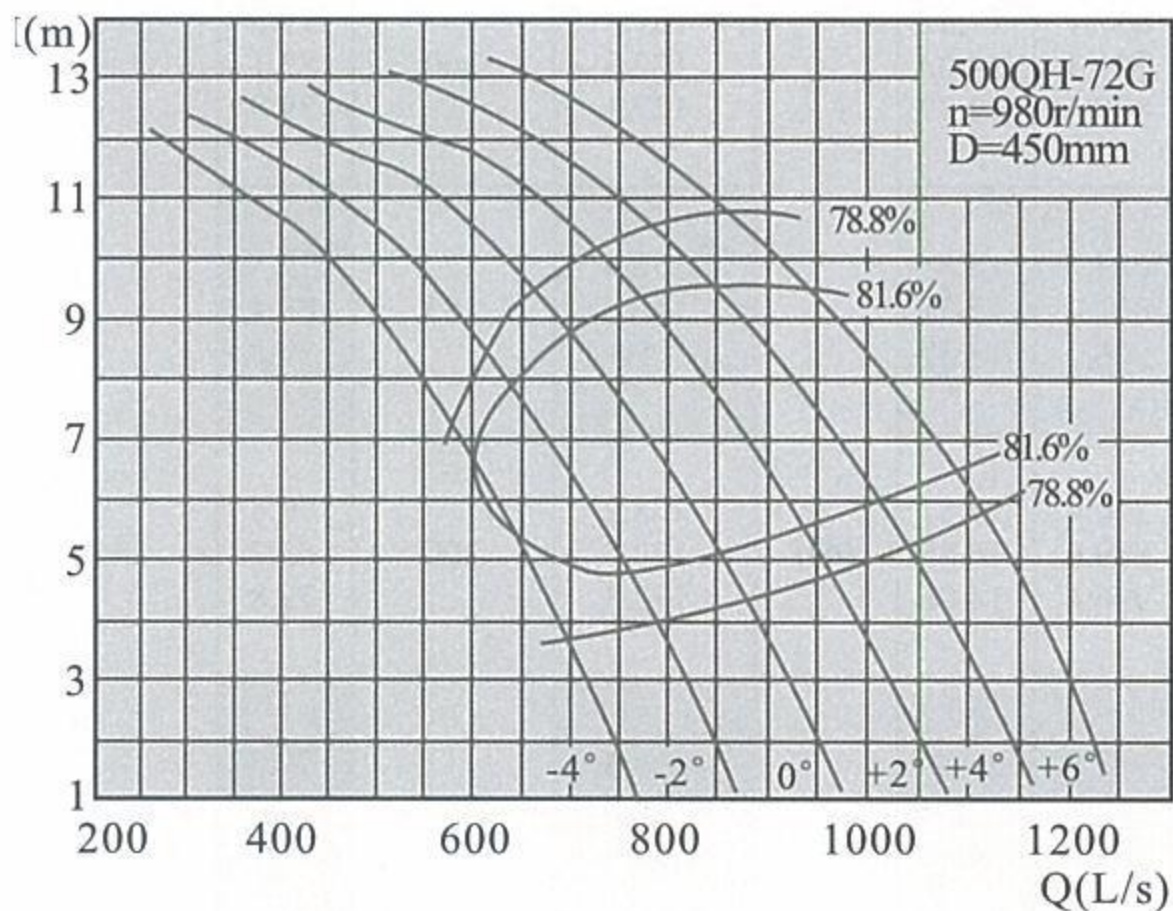

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1864.1	517.8	8.53	980	55	75	78.8	450
	2135	593.1	6.47					
	2200.7	611.3	6					
	2209	613.6	5.91					
	2447.1	679.7	4.01					
-2°	2044.7	568	9.25		65.4	75	78.8	
	2225.4	618.2	8.17					
	2455.3	682	6.52					
	2701.7	750.5	4.73					
	2800.2	777.8	3.8					
0°	2323.9	645.5	9.66		77.6	90	78.8	
	2512.8	698	8.57					
	2824.8	784.7	6.45					
	3005.5	834.9	5.14					
	3112.2	864.5	4.21					
+2°	2529.2	702.6	10.29	89.9	110	78.8		
	2677	743.6	9.56					
	3030.1	841.7	7.4					
	3358.6	932.9	5.14					
	3490	969.4	4.32					
+4°	2759.1	766.4	10.64	101.4	110	78.8		
	2956.2	821.2	9.72					
	3317.5	921.5	7.58					
	3613.2	1003.7	5.65					
	3777.4	1049.3	4.62					
+6°	3038.3	844	10.79	113.3	132	78.8		
	3284.7	912.4	9.46					
	3522.8	978.6	8.37					
	3859.5	1072.1	6.37					
	3941.4	1094.9	5.76					

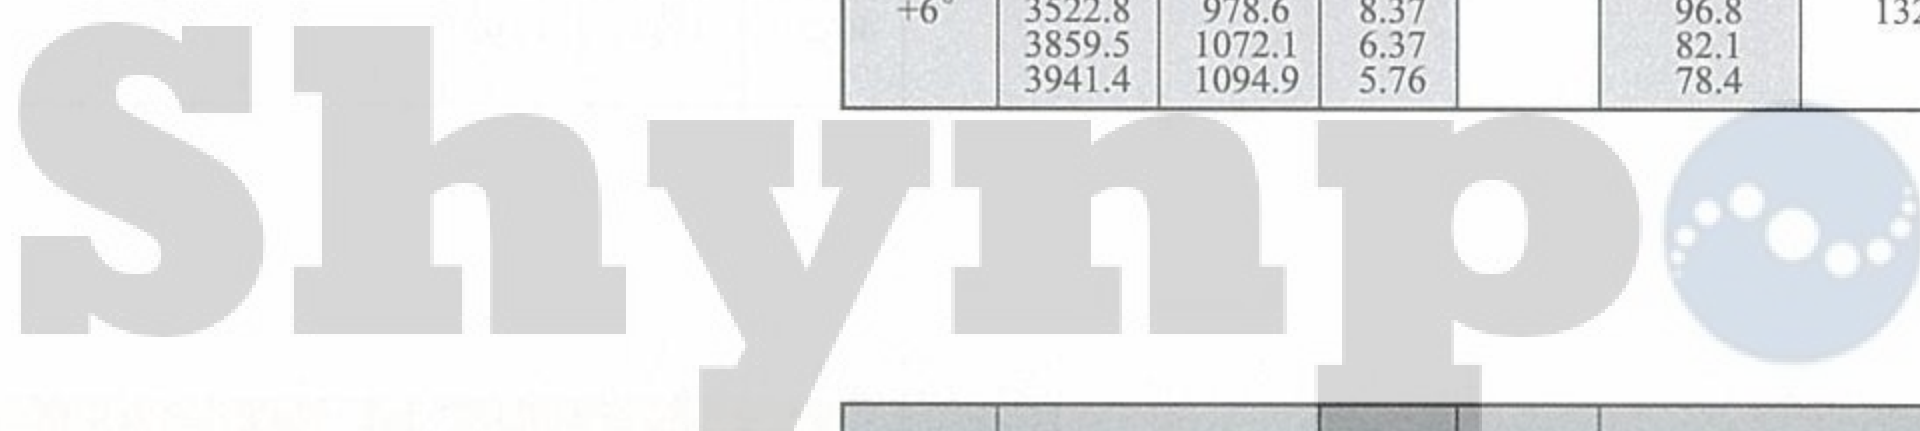


500QH-72D

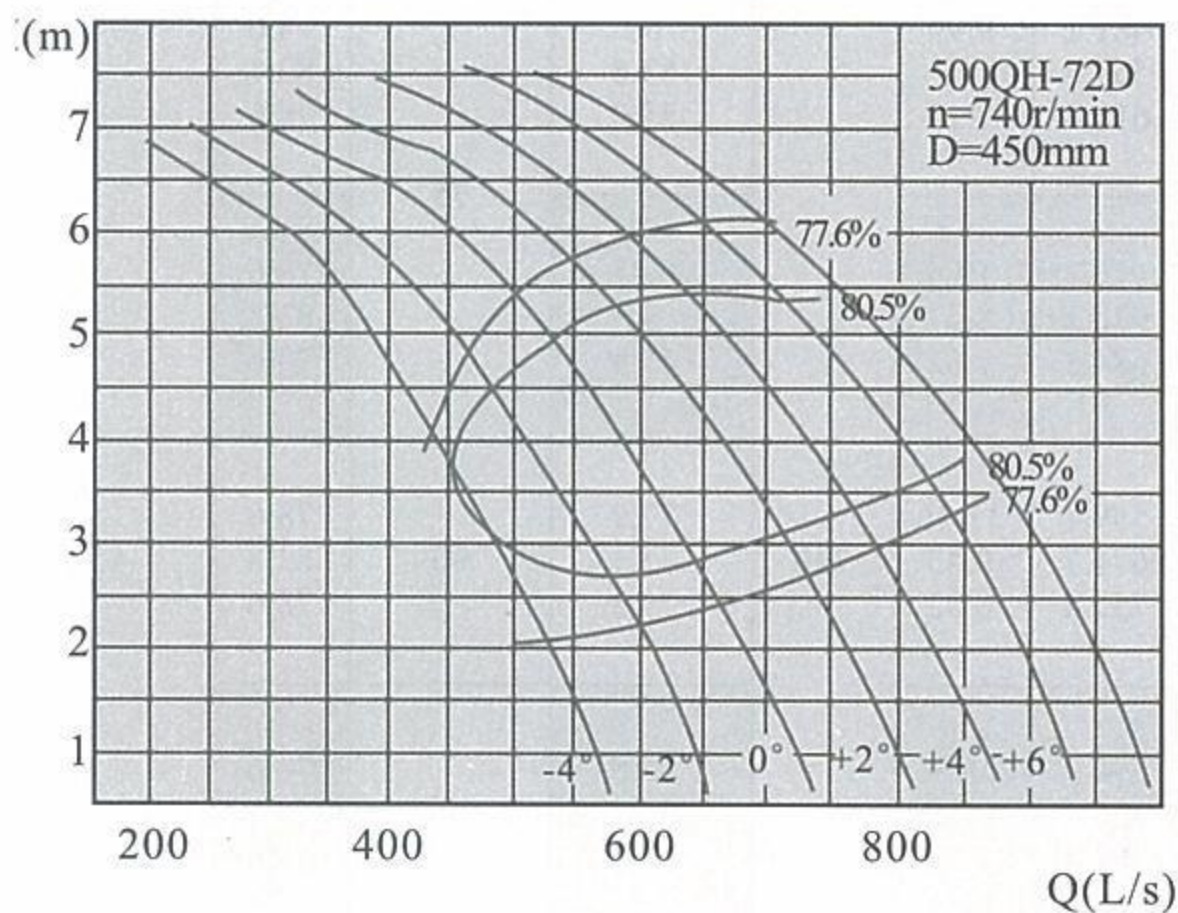

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1407.69	391	4.86	740	24	30	77.6	450
	1612.2	447.8	3.69					
	1661.8	461.8	3.42					
	1168	463.3	3.37					
	1847.8	513.3	2.29					
-2°	1544	428.9	5.27		28.6	37	77.6	
	1680.4	466.8	4.66					
	1854	515	3.72					
	2040	566.7	2.7					
	2114.4	587.3	2.17					
0°	1754.8	487.4	5.51		33.9	45	77.6	
	1897.4	527.1	4.89					
	2133	592.5	3.68					
	2269.5	630.4	2.93					
	2350.1	652.8	2.4					
+2°	1909.8	530.5	5.87	39.3	45	77.6		
	2021.4	561.5	5.45					
	2288.1	635.6	4.22					
	2536.1	704.5	2.93					
	2635.3	732	2.46					
+4°	2083.4	578.7	6.07	44.4	55	77.6		
	2232.2	620.1	5.54					
	2505.1	695.9	4.32					
	2728.3	757.9	3.22					
	2852.3	792.3	2.64					
+6°	2294.3	637.3	6.15	49.6	55	77.6		
	2480.3	689	5.39					
	2660.1	738.9	4.77					
	2914.3	809.5	3.63					
	2976.3	826.8	3.28					


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

00QZ-50G

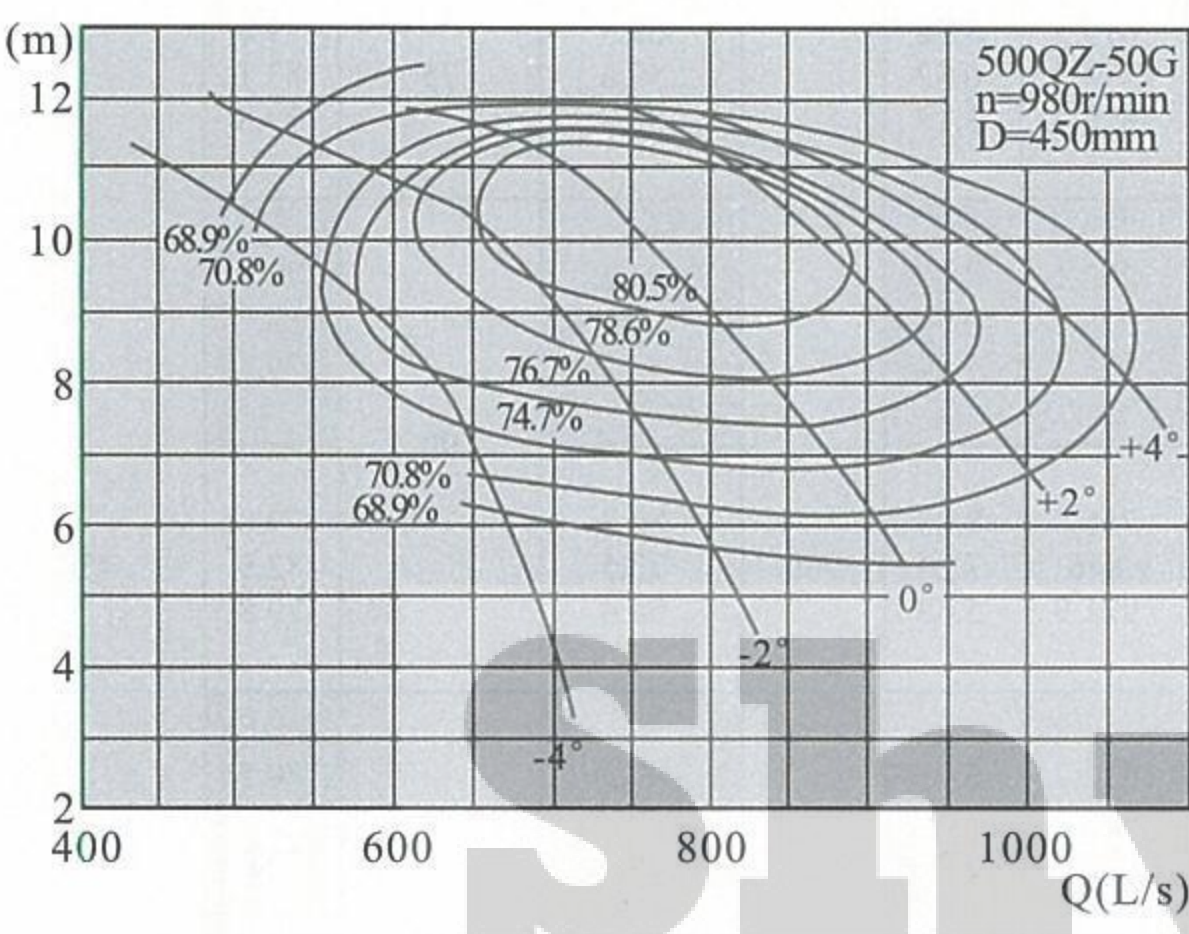


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	2000.9	555.8	9.58	980	68.6	75	76.1	450	
	2052.9	570.3	9.56		68		78.7		
	2331.6	647.7	7.38		61.6		76.1		
-2°	2131.8	592.2	10.99		83.9	90	76.1		
	2406	668.3	9.87		79		81.9		
	2769.9	769.4	6.96		69		76.1		
0°	2357.8	655	11.58		97.8	110	76.1		
	2677	743.6	10.38		90.9		83.3		
	3168.9	880.3	6.81		77.3		76.1		
+2°	2743	762	11.61		114.1	132	76.1		
	3079.4	855.4	10.28		103.9		83		
	3524.5	979	7.39		93.3		76.1		
+4°	3038.5	844	11.46	124.7	160	76.1			
	3383.2	939.8	10.05	117.3		79			
	3663.3	1017.6	8.98	117.8		76.1			

00QZ-50D

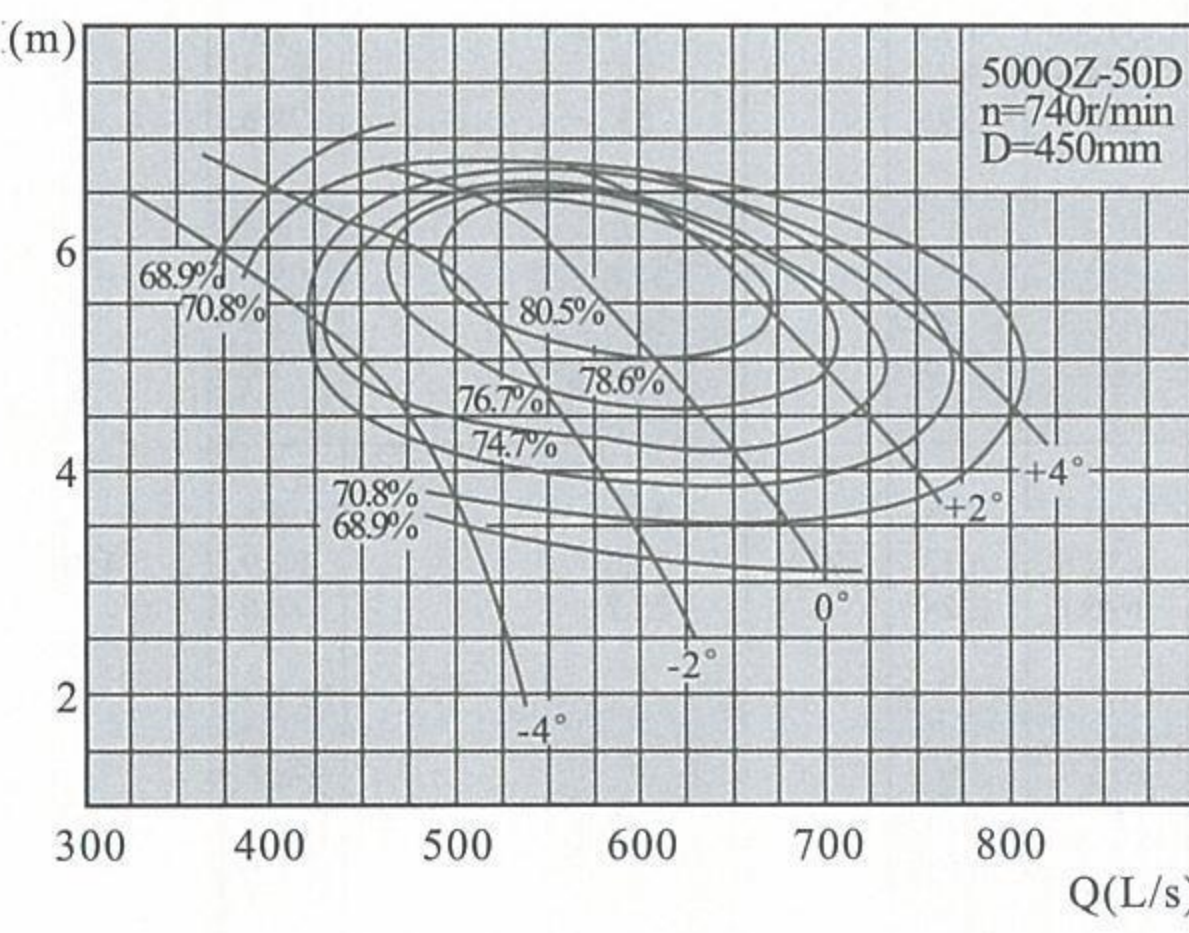


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	1510.9	419.7	5.46	740	30.1	37	74.7	450	
	1550.2	430.6	5.45		29.7		77.4		
	1760.6	489	4.21		27		74.7		
-2°	1609.8	447.2	6.26		36.8	45	74.7		
	1816.8	504.7	5.63		34.5		80.8		
	2091.6	581	3.97		30.3		74.7		
0°	1780.4	494.6	6.6		42.9	55	74.7		
	2021.4	561.5	5.92		39.6		82.3		
	2392.8	664.7	3.89		33.9		74.7		
+2°	2071.3	575.4	6.62		50		74.7		
	2325.3	645.9	5.86		45.3		82		
	2661.3	739.3	4.21		40.9		74.7		
+4°	2294.4	637.3	6.53	54.7	75	74.7			
	2554.7	709.6	5.77	51.2		77.0			
	2854.7	791.6	4.72	47.7		74.7			


500QZ-75G

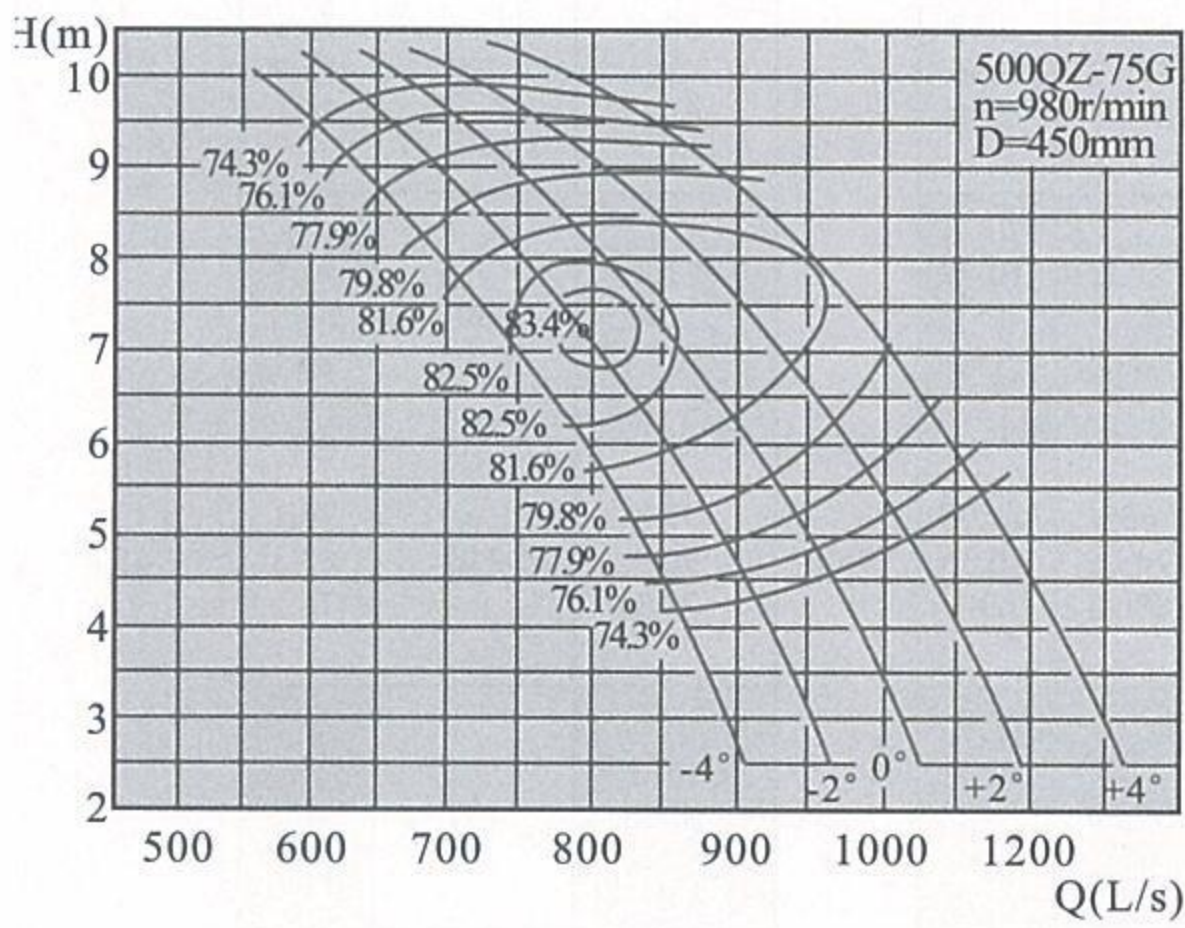

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	2445	679.2	8.32	980	69.5	75	79.8	450
	2787.1	774.2	6.52		59.6		83.1	
	2985.8	829.4	5.17		52.7		79.8	
-2°	2527.5	702.1	8.63		74.5	90	79.8	
	2909.4	808.2	6.97		66		83.7	
	3162.4	878.4	5.34		57.7		79.8	
0°	2719.3	755.4	8.85		82.2	110	79.8	
	3045.7	846	7.24		72.5		82.9	
	3318.8	921.9	5.68		64.4		79.8	
+2°	2925.8	812.7	8.93		89.3	110	79.8	
	3259.2	905.3	7.39		79.7		82.3	
	3506.2	973.9	6.33		75.8		79.8	
+4°	3232	897.8	8.92	98.5	110	79.8		
	3410.3	947.3	7.83	89.1		81.6		
	3592.5	997.9	7.04	86.4		79.8		

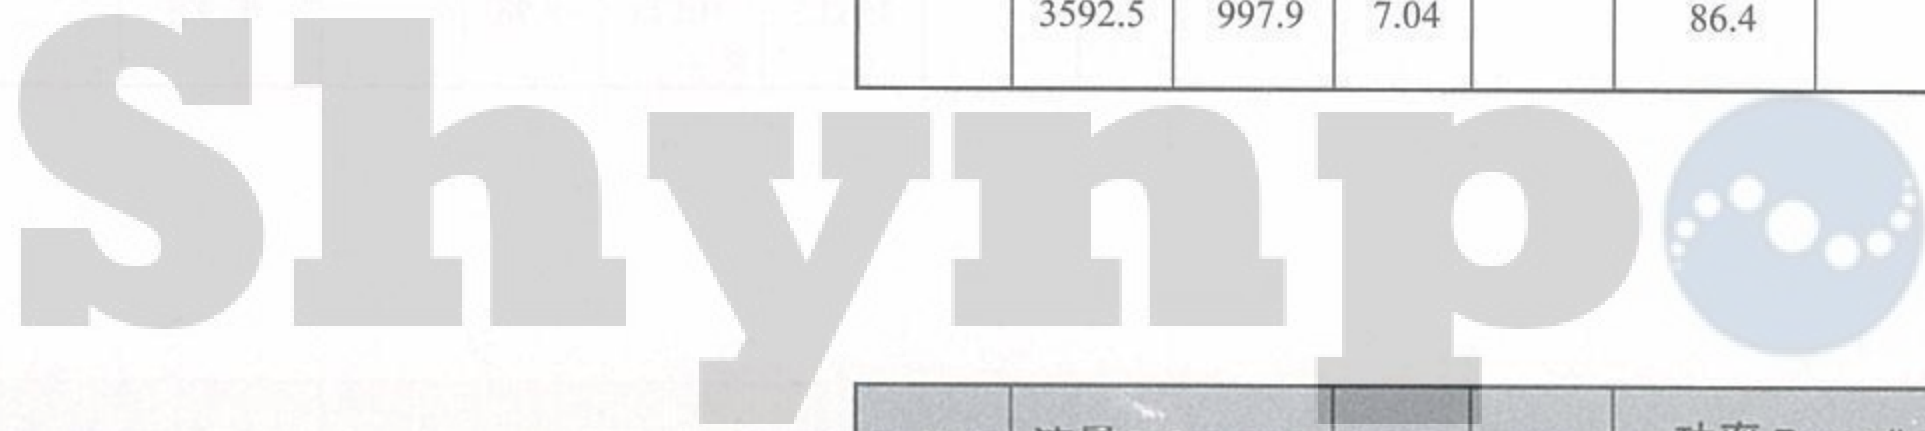


500QZ-75D

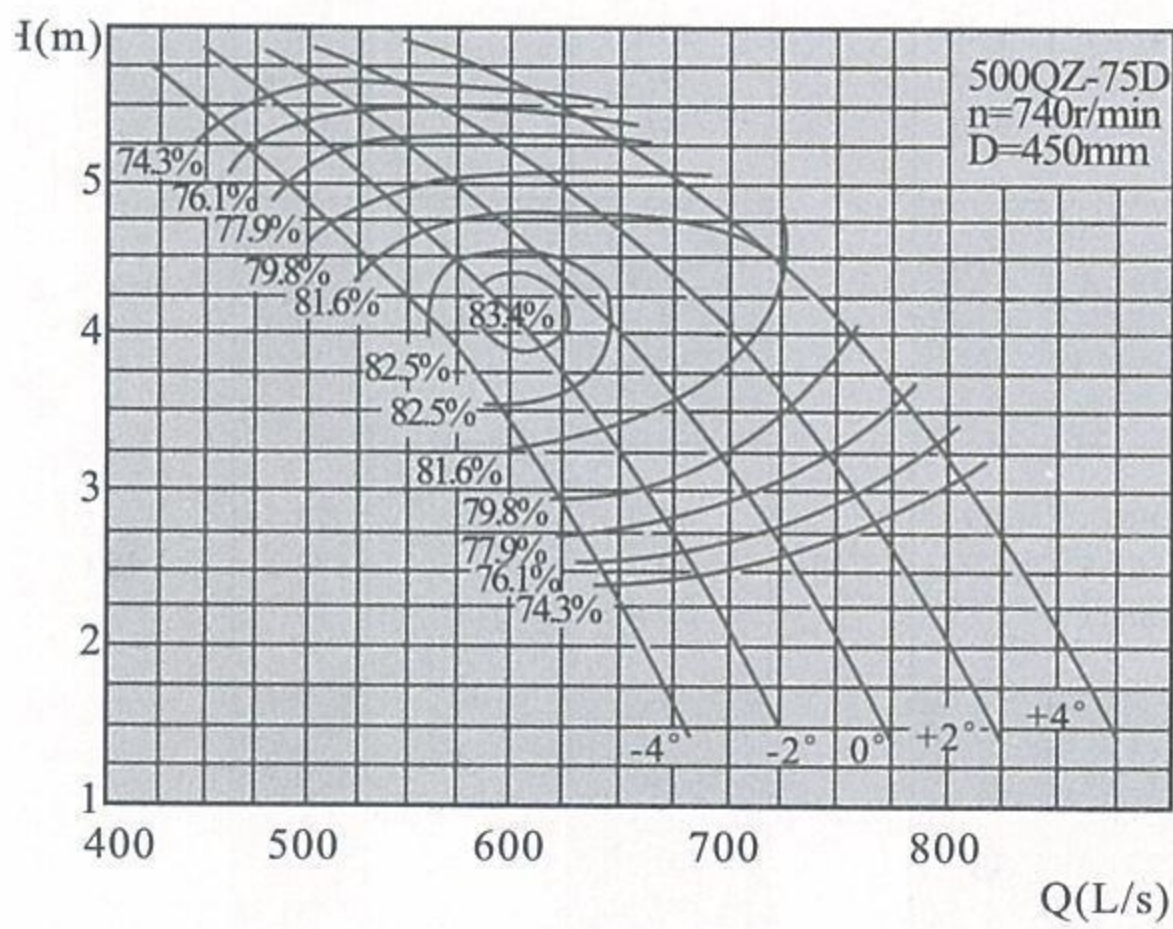

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	1846.2	512.8	4.75	740	30.4	37	78.6	450
	2104.5	584.6	3.72		26		82.1	
	2254.6	626.3	2.95		23		78.6	
-2°	1908.5	530.1	4.92		32.6	45	78.6	
	2196.9	610.3	3.97		28.7		82.8	
	2387.9	663.3	3.05		25.2		78.6	
0°	2053.4	570.4	5.05		35.9	45	78.6	
	2299.8	638.8	4.13		31.6		81.9	
	2506	696.1	3.24		28.2		78.6	
+2°	2209.2	613.7	5.09		39	55	78.6	
	2461.1	683.6	4.21		34.8		81.3	
	2647.5	735.4	3.61		33.1		78.6	
+4°	2440.5	677.9	5.09	43	55	78.6		
	2575.1	715.3	4.47	38.9		80.6		
	2712.7	753.5	4.01	37.8		78.6		


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

500QZ-100G

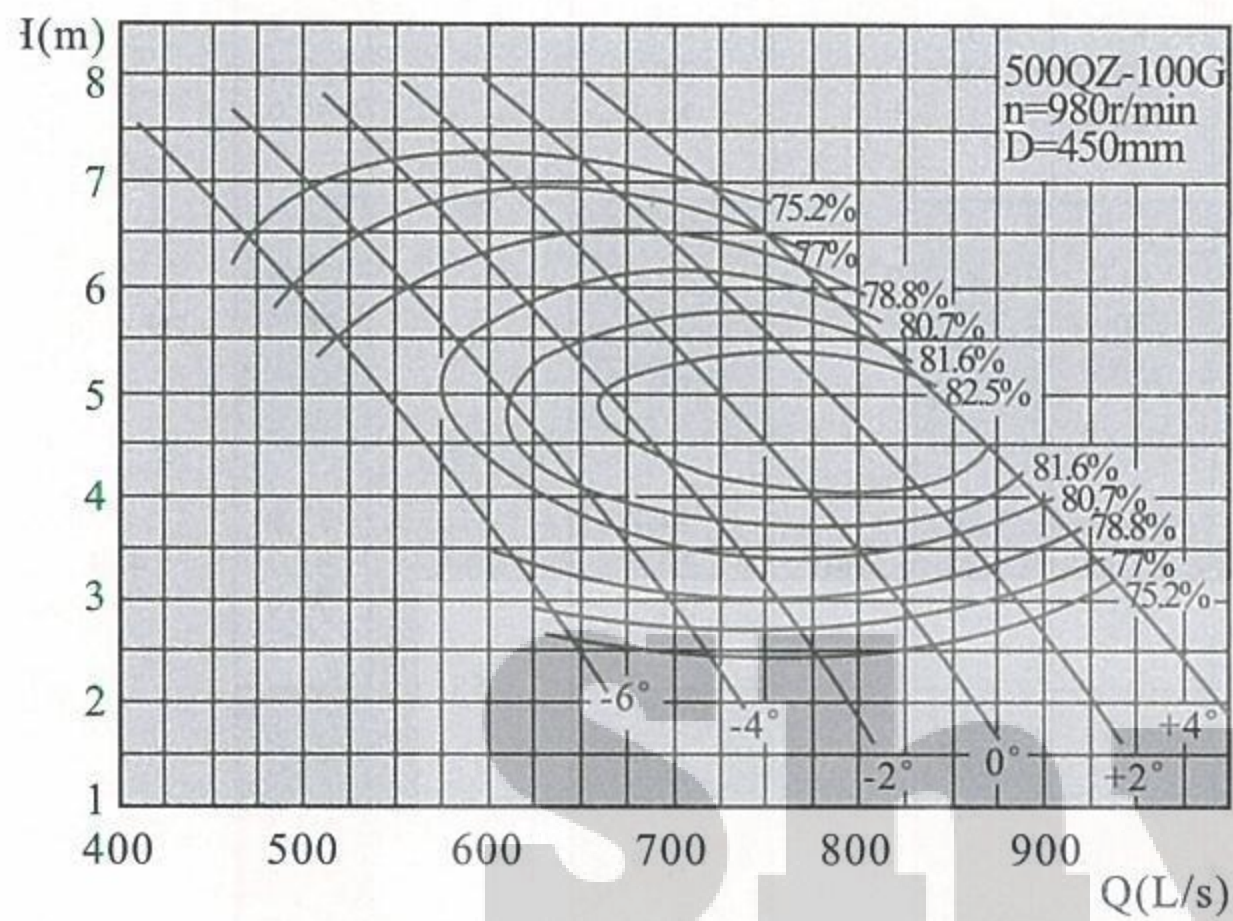


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-6°	1884.5	523.5	5.41	980	35.2	45	78.8	450	
	2052.9	570.3	4.14		28.7		80.7		
	2212.2	614.5	3.34		25.5		78.8		
-4°	2000.6	555.7	5.99		41.4		78.8		
	2299.3	638.7	4.21		32.3		81.7		
	2510.9	697.5	2.99		26		78.8		
-2°	2141.5	594.8	6.28		46.5	55	78.8		
	2504.6	695.7	4.32		35.8		82.3		
	2733.2	759.2	3.02		28.5		78.8		
0°	2294.4	637.3	6.42		50.9		75		78.8
	2709.9	752.7	4.33		38.7				82.5
	2929.5	813.7	3.06		31				78.8
+2°	2505.1	695.9	6.45	55.9	75	78.8			
	2874.1	798.4	4.55	43		83			
	3102.5	861.8	3.31	35.5		78.8			
+4°	2738.1	760.6	6.23	58.9		75	78.8		
	3079.4	855.4	4.57	46.4			82.7		
	3266.8	907.4	3.62	40.8			78.8		

500QZ-100D

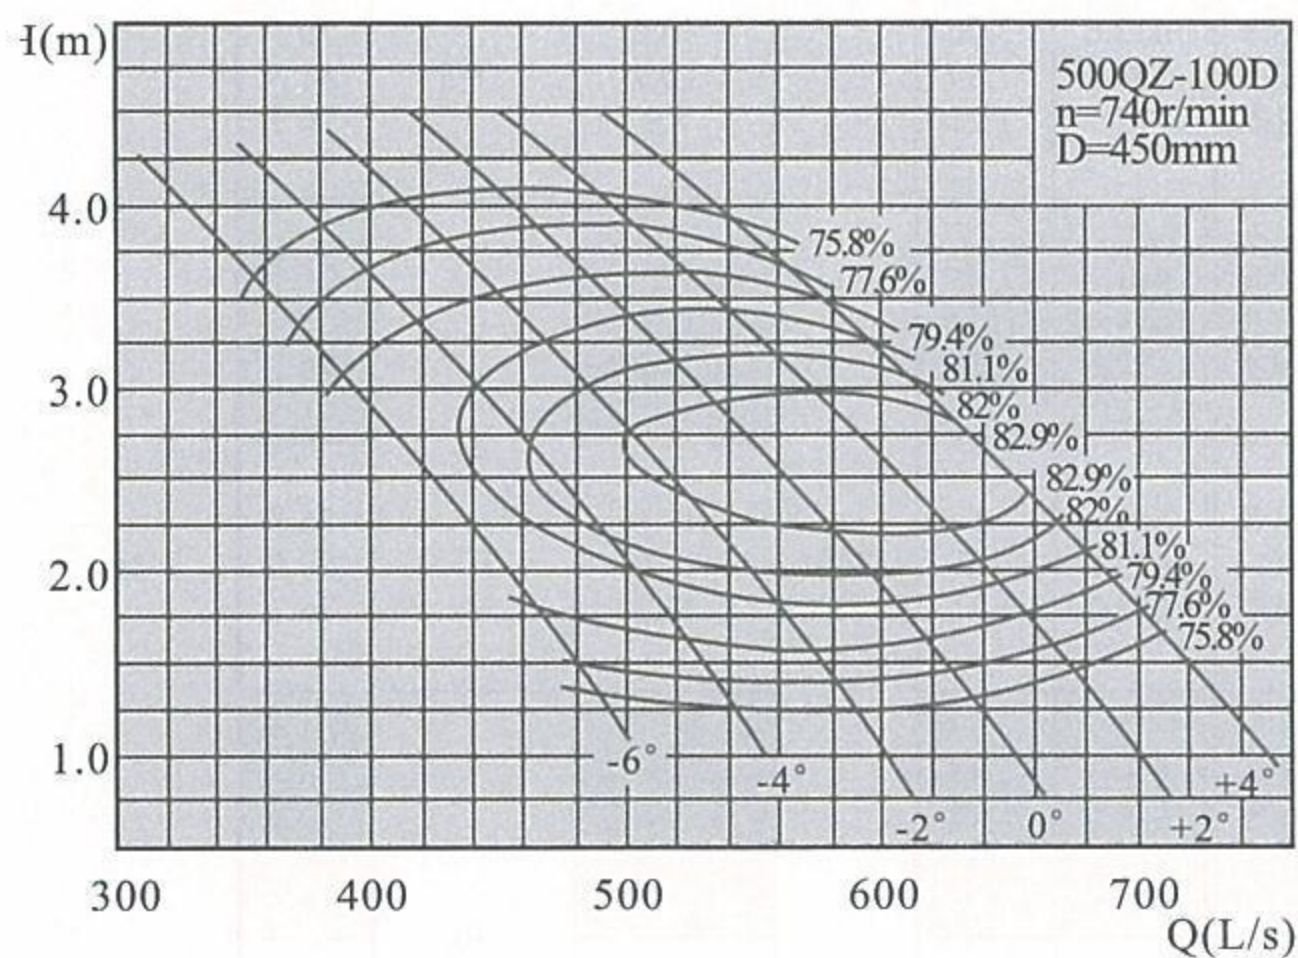


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-6°	1423	395.3	3.08	740	15.4	18.5	77.6	450	
	1550.2	430.6	2.36		12.5		79.6		
	1670.5	464	1.9		11.2		77.6		
-4°	1510.7	419.6	3.42		18.1		22		77.6
	1736.2	482.3	2.4		14.1				80.6
	1896	526.7	1.71		11.3				77.6
-2°	1617	449.2	3.58		20.3	30			77.6
	1891.2	525.3	2.46		15.6				81.2
	2063.8	573.3	1.72		12.5				77.6
0°	1732.5	481.2	3.66		22.3		30		77.6
	2046.2	568.4	2.47		16.9				81.5
	2212	614.5	1.75		13.6				77.6
+2°	1891.6	525.4	3.68	24.4	30	77.6			
	2170.2	602.8	2.6	18.7		82			
	2342.7	650.7	1.89	15.5		77.6			
+4°	2067.6	574.3	3.55	25.8		30	77.6		


500QZ-135G

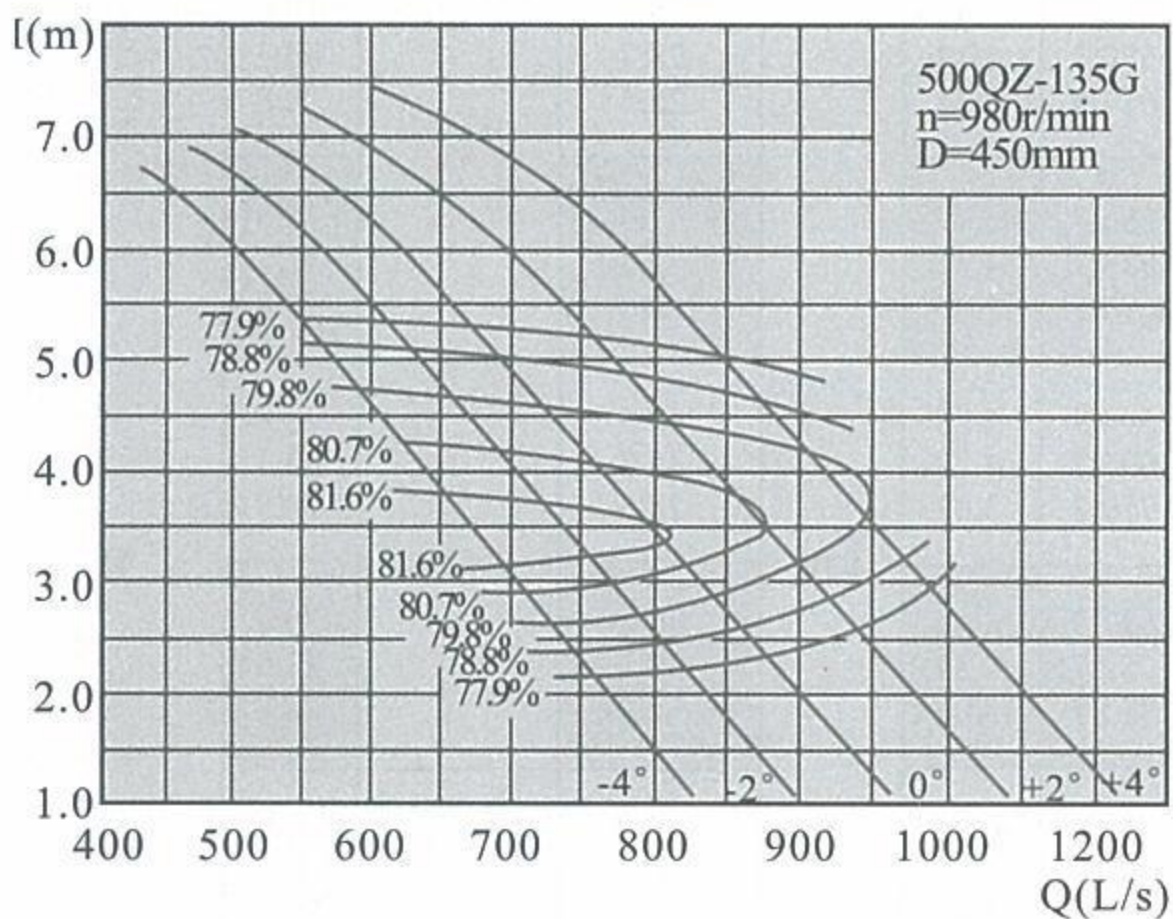

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	1971.7	547.7	5.36	980	37	45	77.9	450	
	2547.3	707.6	2.96		24.9		82.4		
	2730.2	758.4	2.13		20.3		77.9		
-2°	2199.4	611	5.31		40.9		77.9		
	2738.6	760.7	3.17		28.8		82		
	2965.7	823.8	2.25		23.3		77.9		
0°	2428.5	674.6	5.26		44.7	55	77.9		
	2920.1	811.1	3.34		32.5		81.7		
	3171.4	880.9	2.3		25.5		77.9		
+2°	2763.9	767.8	4.97		48.1		75		77.9
	3145.9	873.9	3.46		36.7				80.9
	3387.1	940.9	2.54		30.1				77.9
+4°	3043.8	845.5	5.01	53.3	75	77.9			
	3367.6	935.5	3.65	41.7		80.2			
	3566.6	990.7	2.93	36.5		77.9			

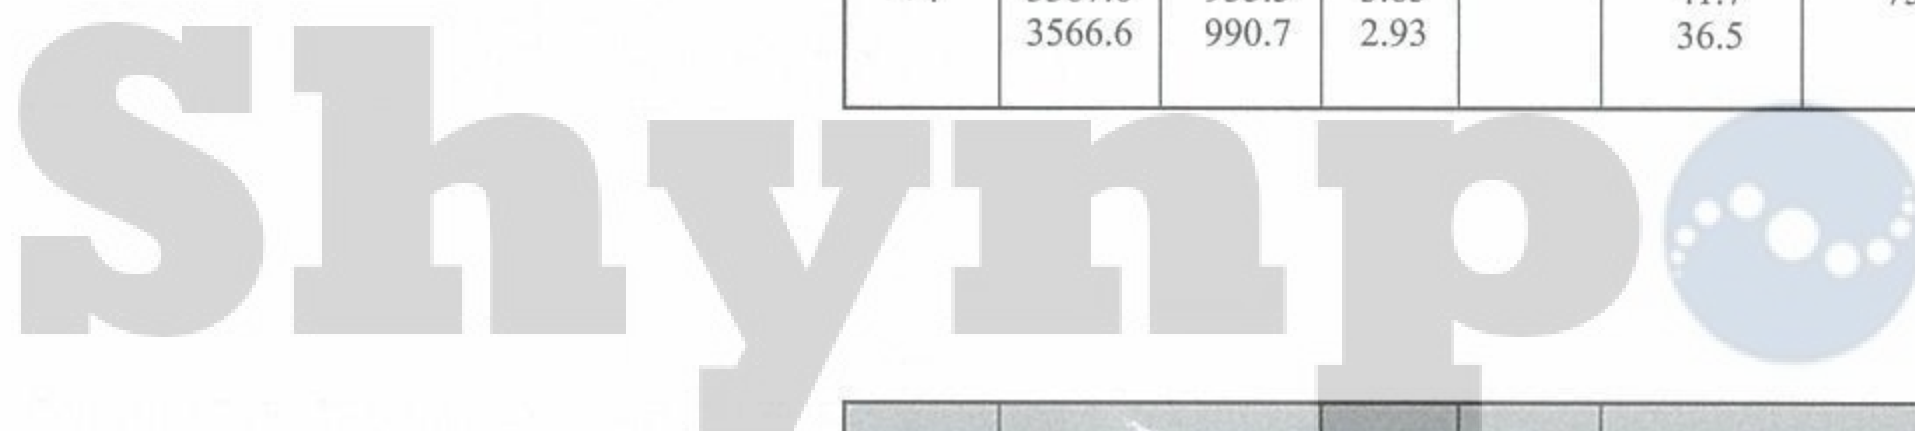


500QZ-135D

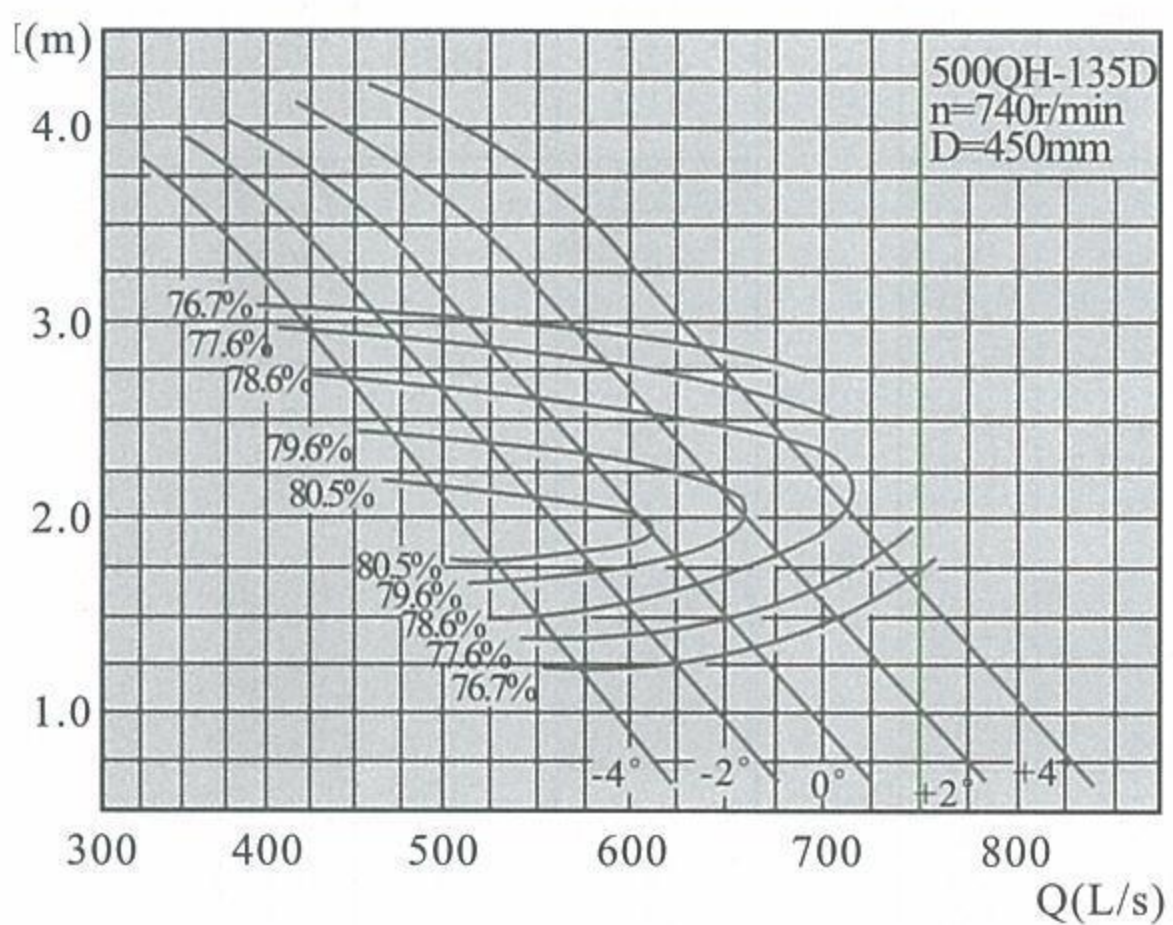

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	1488.8	413.6	3.06	740	16.2	22	76.7	450	
	1923.5	534.3	1.69		10.9		81.3		
	2061.5	572.7	1.21		8.9		76.7		
-2°	1660.8	461.3	3.03		17.9		22		76.7
	2067.9	574.4	1.8		12.6				81
	2239.4	622.1	1.28		10.2				76.7
0°	1833.8	509.4	3		19.6	30			76.7
	2205	612.5	1.9		14.2				80.5
	2394.7	665.2	1.31		11.2				76.7
+2°	2087	579.7	2.84		21		30		76.7
	2375.5	659.9	1.97		16				79.8
	2557.6	710.4	1.45		13.2				76.7
+4°	2298.4	638.4	2.85	23.3	30	76.7			
	2542.9	706.4	2.08	18.2		79.1			
	2693.1	748.1	1.67	16		76.7			


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

500QH-35

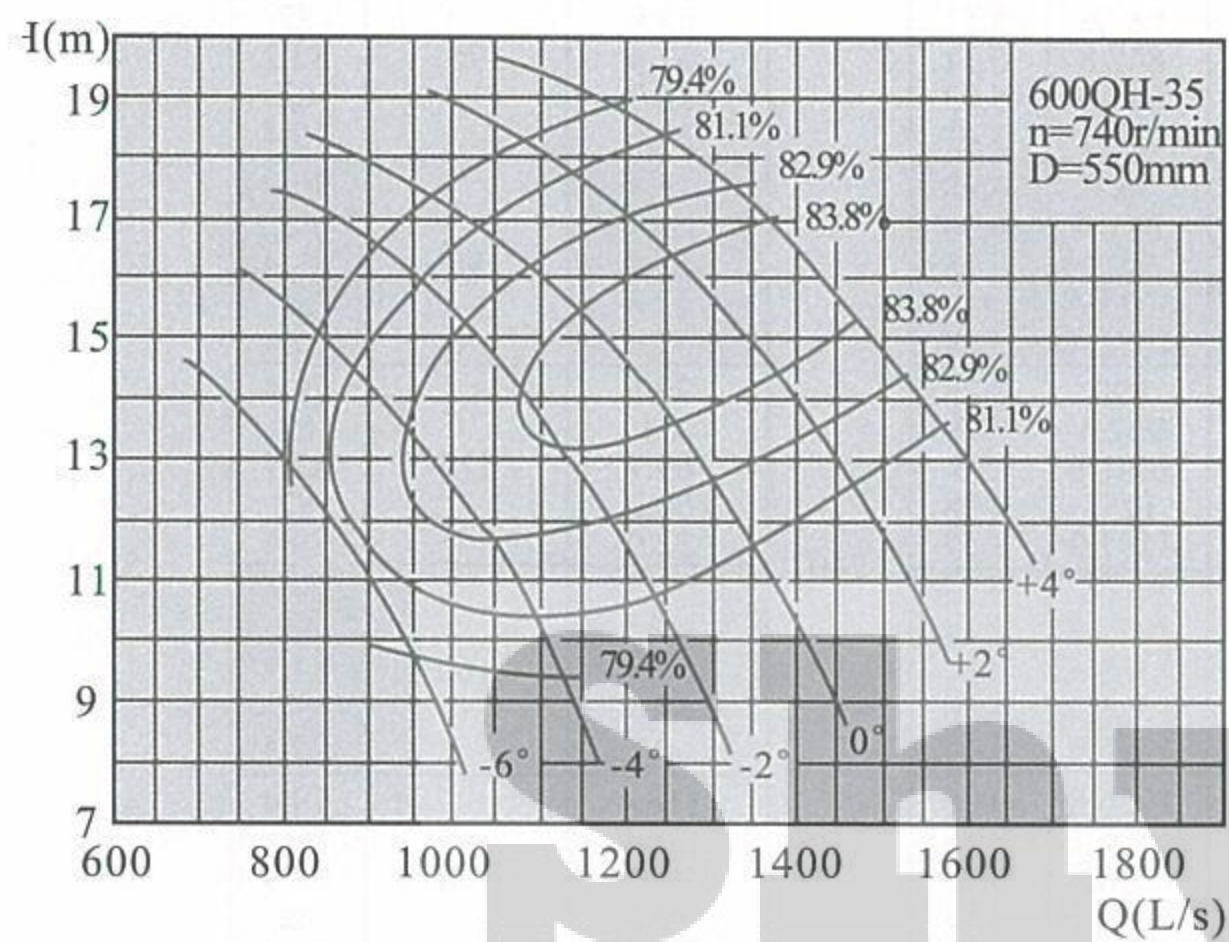


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)			
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power					
-6°	2923.1	812	12.82	740	128.7	160	79.4	550			
	3283.1	912	11.03		122.4		80.6				
	3458.6	960.7	9.67		114.9		79.4				
-4°	3023.9	840	15.06		156.4	185	79.4		550		
	3679.4	1022	12.26		147.9		83.1				
	3948.8	1096.9	10.42		138.1		81.1				
-2°	3299	916.4	16.55		187.4	220	79.4			550	
	4075.6	1132.1	13.31		176		84				
	4445.8	1234.9	10.77		160.8		81.1				
0°	3518.6	977.4	17.33		209.4	250	79.4				550
	4415.2	1226.5	14.29		204		84.3				
	4868.1	1352.2	11.6		189.6		81.1				
+2°	3904.7	1084.6	18.27	245	280	79.4	550				
	4754.9	1320.8	15.52	237.1		84.8					
	5299.4	1472.1	12.59	224		81.1					
+4°	4246.6	1179.6	18.83	274.6	315	79.4		550			
	5094.6	1415.1	16.2	266.8		84.3					
	5673	1575.8	13.54	258		81.1					

500QH-40

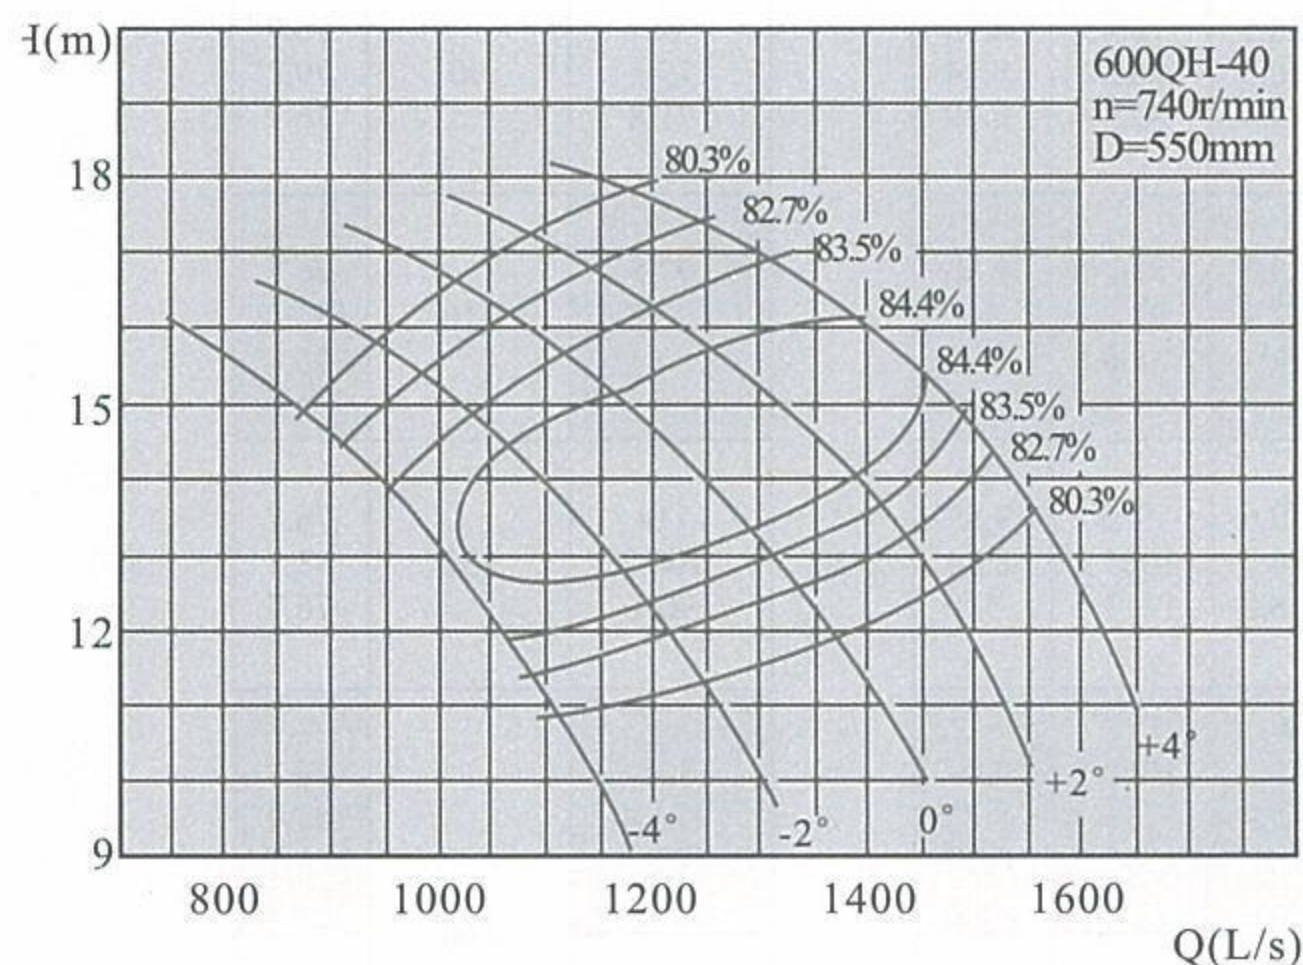


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)			
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power					
-4°	3162	878.3	14.93	740	160.3	185	80.3	550			
	3679.4	1022	11.95		143.5		83.5				
	4012.2	1114.5	10.89		148.4		80.3				
-2°	3395.9	943.3	15.83		182.5	200	80.3		550		
	4075.6	1132.1	12.96		171.6		83.8				
	4497.9	1249.4	11.39		173.9		80.3				
0°	3675	1020.8	16.67		208	250	80.3			550	
	4415.2	1226.5	14.09		201.6		84.1				
	4945.5	1373.8	11.98		201.1		80.3				
+2°	3909.1	1085.9	17.26		229.1	250	80.3				550
	4754.9	1320.8	15.06		230.2		84.7				
	5293.7	1470.5	12.62		226.9		80.3				
	4252.4	1181.2	17.85	257.7		80.3					

500QH-72

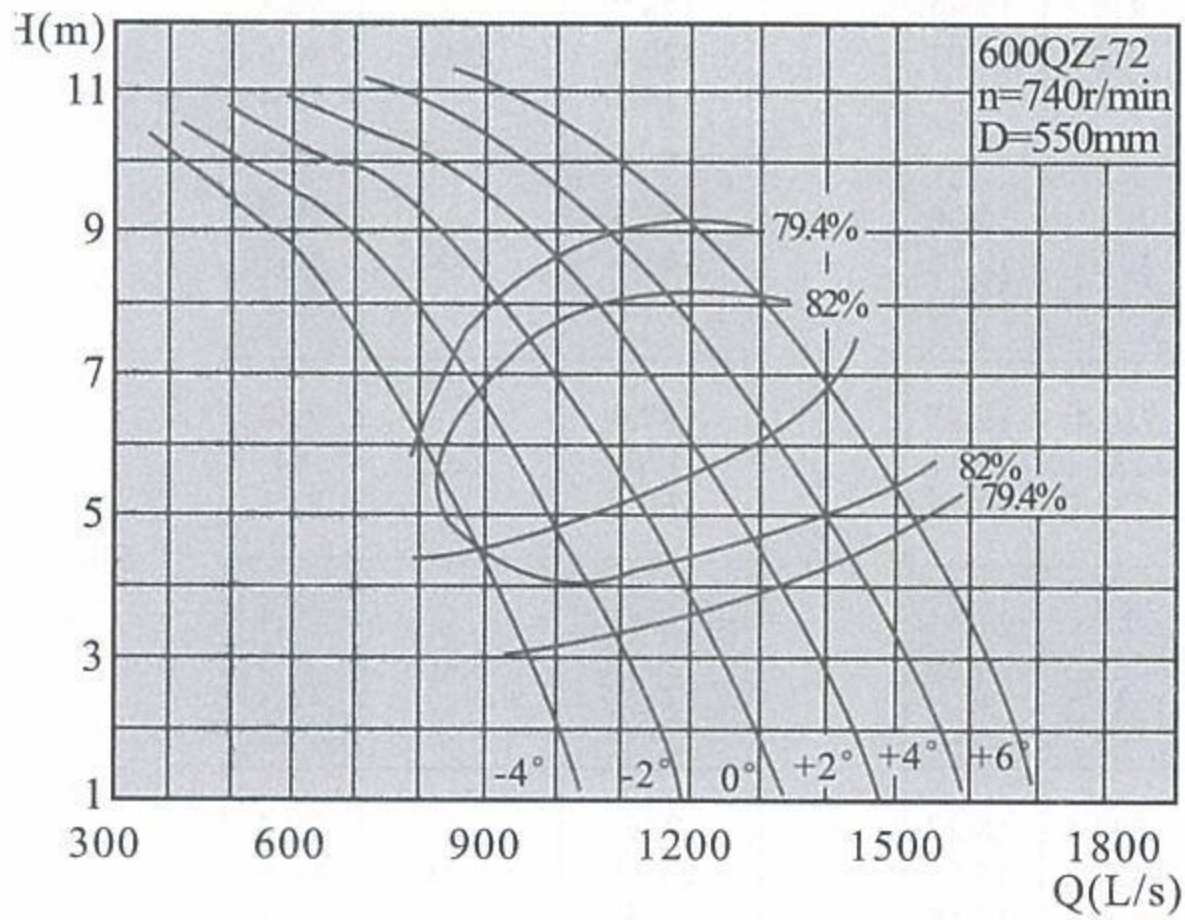

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	2569.9	713.9	7.27	740	64.1	75	79.4	550
	2943.5	817.6	5.52		53.9			
	3034.1	842.8	5.11		51.4			
	3045.4	845.9	5.03		50.9			
	3373.7	937.1	3.41		39.6			
-2°	2819	783	7.88		76.3	90	79.4	
	3068	852.2	6.96		70.9			
	3385	940.3	5.55		61.4			
	3724.7	1034.6	4.0		49.8			
	3860.5	1072.4	3.24		42.9			
0°	3203.9	890	8.23		90.5	110	79.4	
	3464.3	962.3	7.3		84			
	3894.5	1081.8	5.5		69.7			
	4143.5	1151	4.38		60.2			
	4290.7	1191.9	3.59		52.9			
+2°	3486.9	968.6	8.76	104.9	160	79.4		
	3690.7	1025.2	8.14	99.8				
	4177.5	1160.4	6.3	85.3				
	4630.4	1286.2	4.38	67.3				
	4811.5	1336.5	3.68	60.7				
+4°	3803.9	1056.6	9.06	118.4	160	79.4		
	4075.6	1132.1	8.28	112.1				
	4573.7	1270.5	6.46	96.2				
	4981.3	1383.7	4.81	79.7				
	5207.7	1446.6	3.94	70.4				
+6°	4188.8	1163.6	9.19	132.2	160	79.4		
	4528.5	1257.9	8.05	121.1				
	4856.8	1349.1	7.13	113.2				
	5320.9	1478	5.43	95.9				
	5434.2	1509.5	4.9	91.5				


500QZ-50

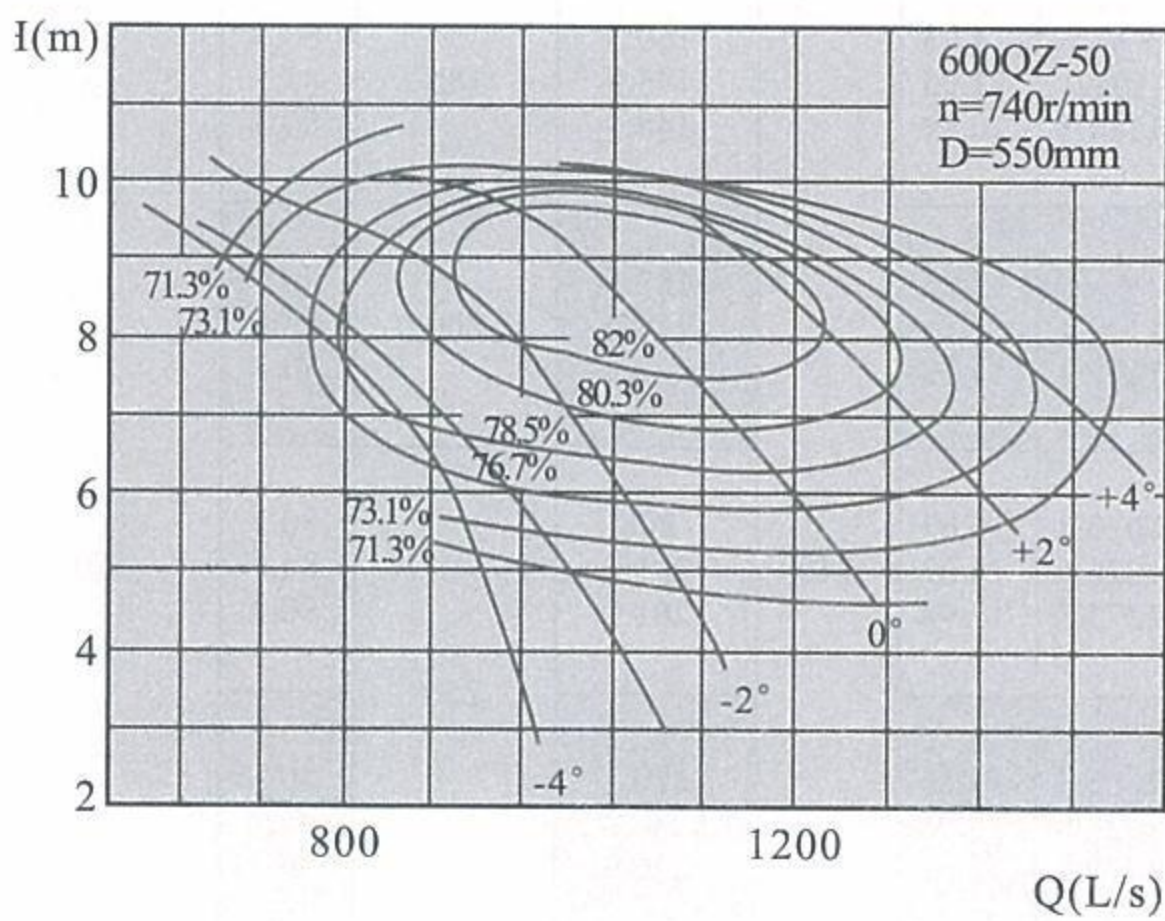

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	2758.5	766.3	8.16	740	80	90	76.7	550
	2830.3	786.2	8.14		79.3			
	3214.4	892.9	6.29		71.8			
-2°	2939.1	816.4	9.36		97.8	110	76.7	
	3317.1	921.4	8.4		92.3			
	3818.7	1060.8	5.93		80.4			
0°	3250.6	903	9.87		114	132	76.7	
	3690.7	1025.2	8.84		106.3			
	4368.8	1213.6	5.8		90.1			
+2°	3781.7	1050.5	9.89		133	160	76.7	
	4245.4	1179.3	8.75		121.4			
	4859	1349.7	6.29		108.7			
+4°	4189.1	1163.6	9.76		145.3	160	76.7	
	4664.3	1295.6	8.56		136.8			
	5050.4	1402.9	7.65		137.4			


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

600QZ-75

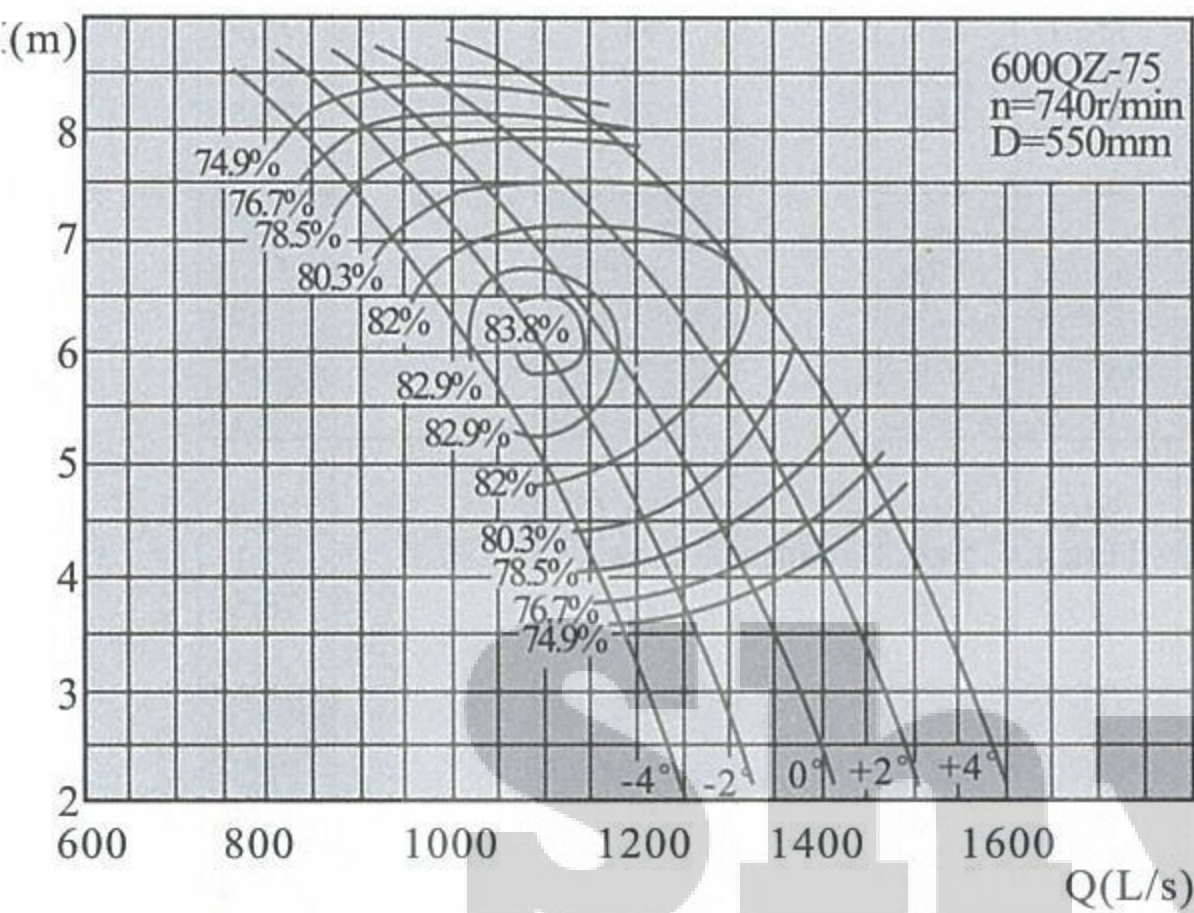


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率 η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	3370.8	936.3	7.09	740	81.2	90	80.3	550
	3842.4	1067.3	5.55		69.6			
	4116.4	1143.4	4.4		61.5			
-2°	3484.5	967.9	7.35		87	110	80.3	
	4011.1	1114.2	5.94		77.1		84.1	
	4359.9	1211.1	4.55		67.4		80.3	
0°	3749	1041.4	7.54		96	132	80.3	
	4199	1166.4	6.16		84.7		83.3	
	4575.4	1271	4.84		75.2		80.3	
+2°	4033.6	1120.4	7.61		104.2	132	80.3	
	4493.4	1248.2	6.29		93.1		82.7	
	4833.8	1342.7	5.39		88.5		80.3	
+4°	4455.8	1237.7	7.6	115	132	80.3		
	4701.7	1306	6.67	104.1		82.1		
	4952.8	1375.8	6	100.8		80.3		

600QZ-100

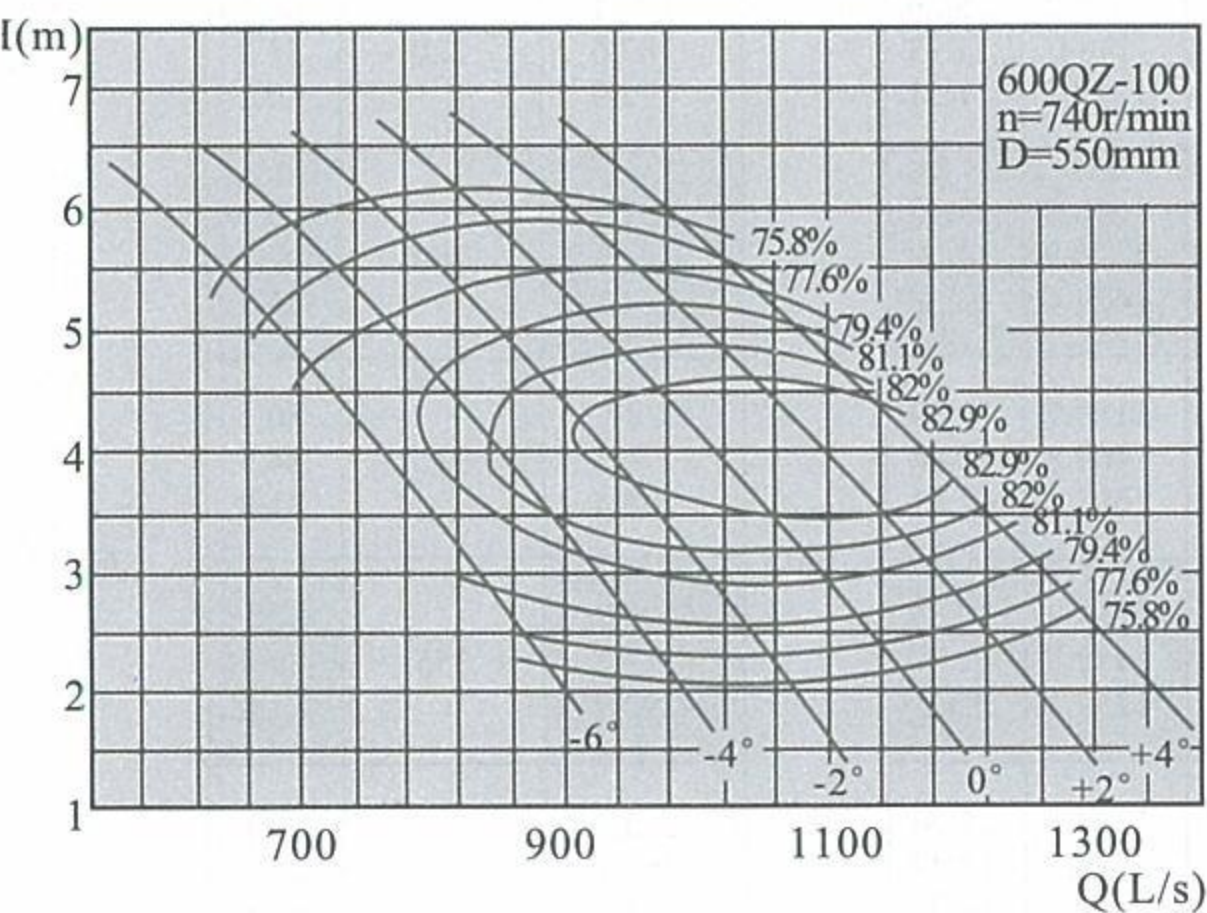


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率 η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	2598.1	721.7	4.6	740	41.1	45	79.4	550
	2830.3	786.2	3.53		33.5		81.1	
	3049.9	847.2	2.85		29.8		79.4	
-4°	2758.2	766.2	5.1		48.3	55	79.4	
	3169.9	880.5	3.59		37.7		82.1	
	3461.7	961.5	2.55		30.3		79.4	
-2°	2952.3	820.1	5.35		54.2	75	79.4	
	3453	959.2	3.68		41.8		82.7	
	3768.1	1046.7	2.57		33.3		79.4	
0°	3163.1	878.6	5.47		59.4	75	79.4	
	3736	1037.8	3.69		45.2		82.9	
	4038.7	1121.9	2.61		36.2		79.4	
+2°	3453.6	959.3	5.5	65.2	75	79.4		
	3962.4	1100.7	3.88	50.2		83.4		
	4277.2	1188.1	2.82	41.4		79.4		
	3774.9	1048.6	5.3	68.8		79.4		

600QZ-135

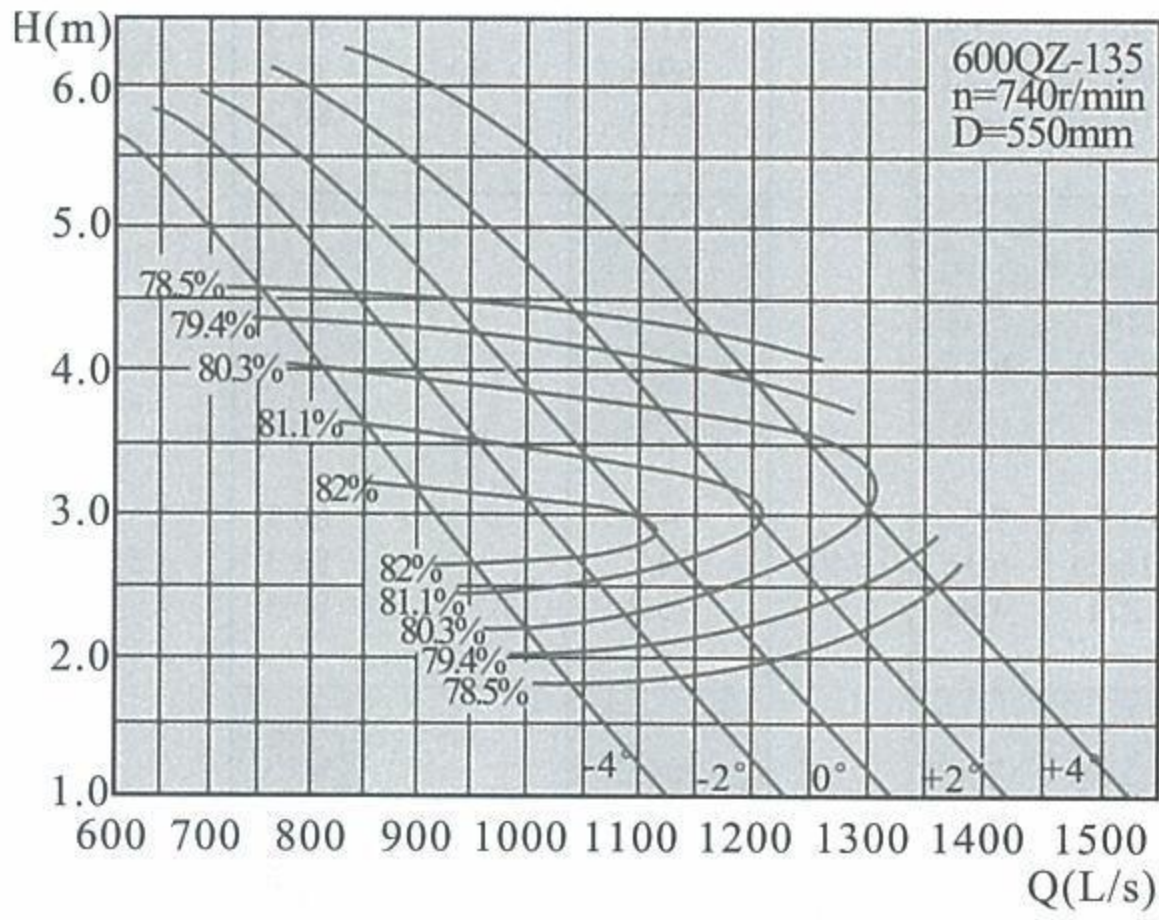

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	2718.3	755.1	4.57	740	43.1	55	78.5	550
	3511.8	975.5	2.52		29.1			
	3763.9	1045.5	1.81		23.7			
-2°	3032.3	842.3	4.53		47.7		78.5	
	3775.6	1048.8	2.7		33.6		82.5	
	4088.7	1135.8	1.92		27.2		78.5	
0°	3348.1	930	4.48		52.1	75	78.5	
	4025.8	1118.3	2.85		38		82.1	
	4372.2	1214.5	1.96		29.8		78.5	
+2°	3810.5	1058.5	4.24		56.1		78.5	
	4337.1	1204.8	2.95		42.8		81.4	
	4669.6	1297.1	2.16		35.1		78.5	
+4°	4196.4	1165.7	4.26	62.1	450	78.5		
	4642.8	1289.7	3.11	48.7		80.7		
	4917.1	1365.9	2.49	42.6		78.5		


700QH-35

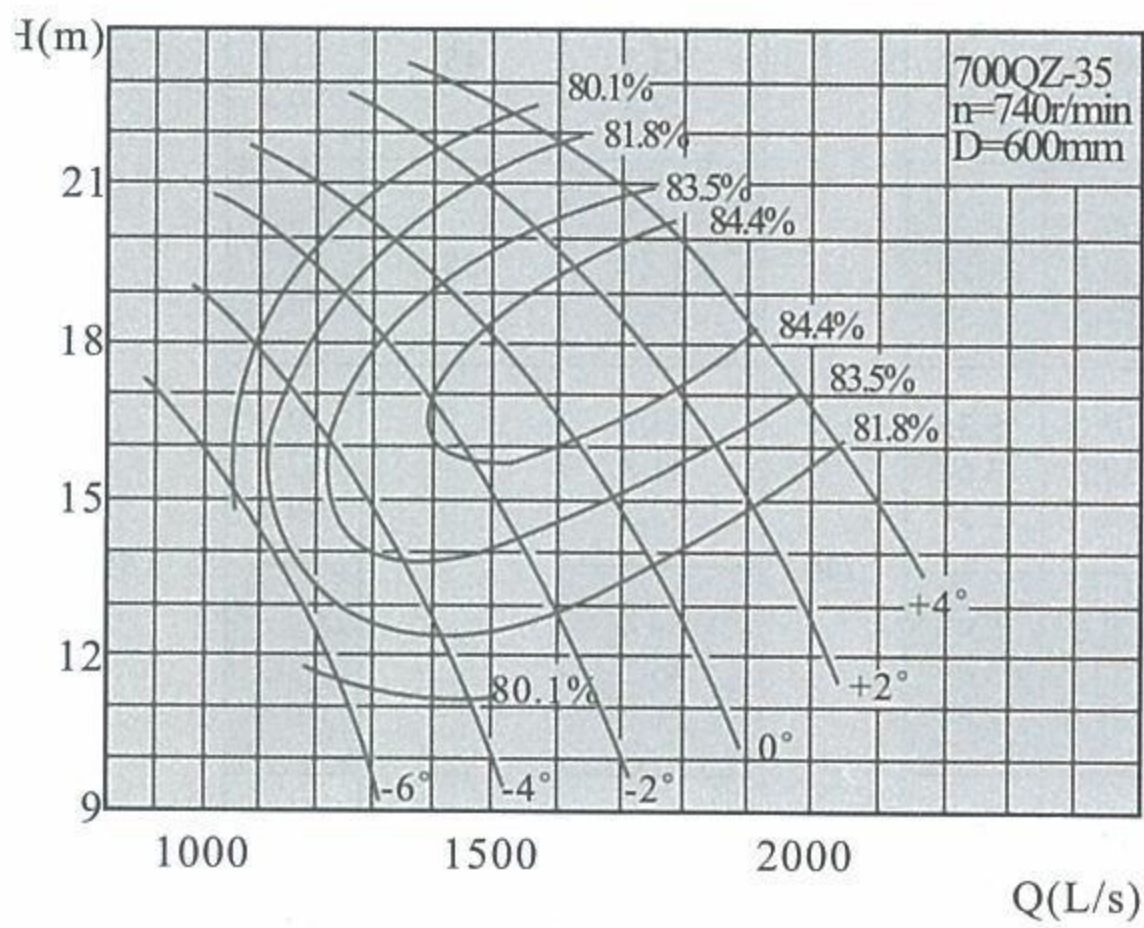

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-6°	3795	1054.2	15.26	740	197.1	220	80.1	600	
	4262.4	1184	13.13		187.6				
	4490.2	1247.3	11.51		175.9		80.1		
-4°	3925.8	1090.5	17.92		239.4		280		80.1
	4776.8	1326.9	14.59		226.9				83.7
	5126.6	1424.1	12.4		211.7				81.8
-2°	4283	1189.7	19.69		287	315			80.1
	5291.3	1469.8	15.84		270.1				84.5
	5771.9	1603.3	12.81		246.4				81.8
0°	4568.1	1268.9	20.63		320.7		355		80.1
	5732.2	1592.8	17		313.1				84.8
	6320.1	1755.6	13.8		290.7				81.8
+2°	5069.3	1408.1	21.74	375.2	450	80.1			
	6173.1	1714.8	18.47	364.1		85.3			
	6880.1	1911.1	14.98	343.4		81.8			
+4°	5513.2	1531.4	22.41	420.5		450	80.1		
	6614.1	1837.2	19.27	409.7			84.8		
	7365.1	2045.9	16.12	395.5			81.8		


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

700QH-40

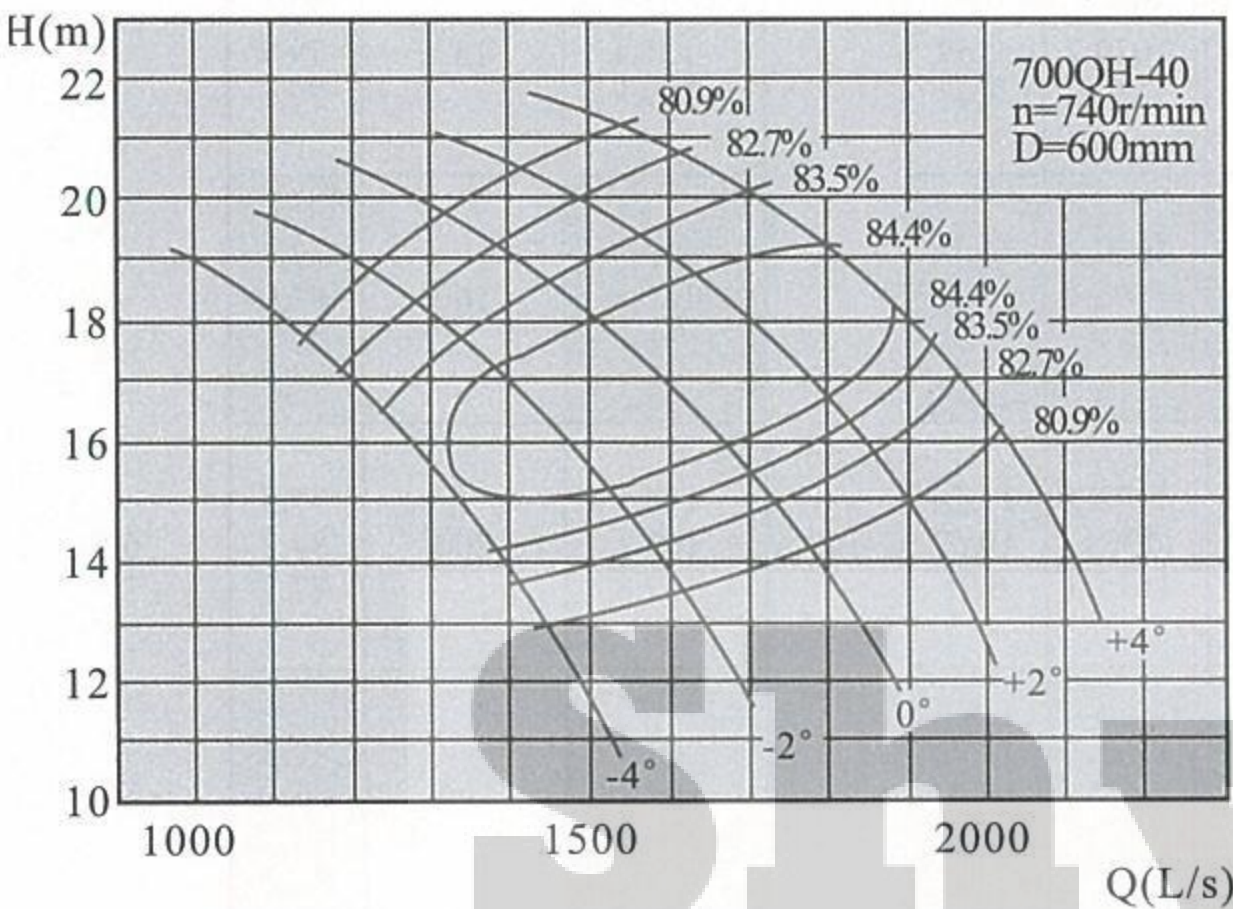


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	4105.1	1140.3	17.76	740	245.5	280	80.9	600	
	4776.8	1326.9	14.22		220.2		84		
	5208.9	1446.9	12.96		227.3		80.9		
-2°	4408.8	1224.7	18.84		279.6	315	80.9		
	5291.3	1469.8	15.42		263.4		84.4		
	5839.5	1622.1	13.55		266.5		80.9		
0°	4771.1	1325.3	19.84		318.7	355	80.9		
	5732.2	1592.3	16.77		309.5		84.7		
	6420.6	1783.5	14.25		308.1		80.9		
+2°	5075	1409.7	20.54		351.1	400	80.9		
	6173.1	1714.8	17.92		353.5		85.3		
	6872.6	1909.1	15.02		347.7		80.9		
+4°	5520.8	1533.6	21.24	394.9	450	80.9			
	6614.1	1837.2	18.96	402.9		84.8			
	7289.6	2024.9	16.24	398.7		80.9			

700QH-72

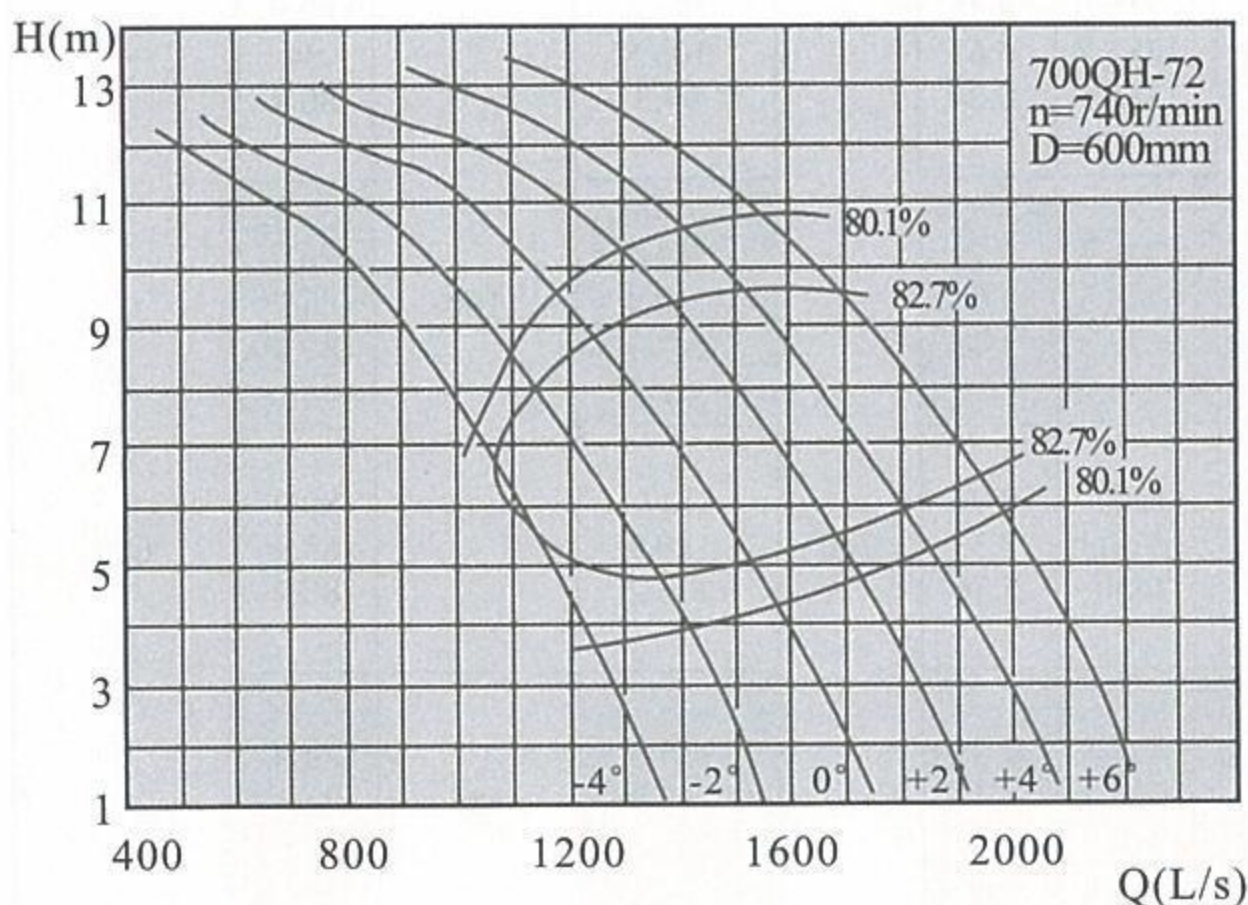


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	3336.4	926.8	8.65	740	98.2	110	80.1	600	
	3821.5	1061.5	6.56		82.7		82.7		
	3939	1094.2	6.08		78.9		82.8		
	3953.7	1098.3	5.99		78.1		82.7		
	4380	1216.7	4.06		60.6		80.1		
-2°	3659.8	1016.6	9.38		116.8	132	80.1		
	3983.1	1106.4	8.28		108.8		82.7		
	4394.7	1220.7	6.61		94.2		83.9		
	4835.6	1343.2	4.79		76.4		82.7		
	5012	1392.2	3.85		65.8		80.1		
0°	4159.5	1155.4	9.79		138.6	160	80.1		
	4497.6	1249.3	8.69		128.8		82.7		
	5056.1	1404.5	6.54		107		84.2		
	5379.4	1494.3	5.21		92.4		82.7		
	5570.5	1547.4	4.27		81		80.1		
+2°	4527	1257.5	10.43	160.7	185	80.1			
	4791.5	1331	9.69	153		82.7			
	5423.5	1506.5	7.5	130.9		84.7			
	6011.5	1669.8	5.21	103.2		82.7			
	6246.6	1735.2	4.38	93		80.1			
+4°	4938.5	1371.8	10.78	181.3	200	80.1			
	5291.3	1469.8	9.86	171.9		82.7			
	5938	1649.4	7.69	147.7		84.2			
	6467.1	1796.4	5.73	122.2		82.7			
	6761	1878.1	4.69	107.9		80.1			
	5438.2	1510.6	10.94	202.5		80.1			
	5879.2	1633.1	9.58	185.8		82.7			


700QZ-50

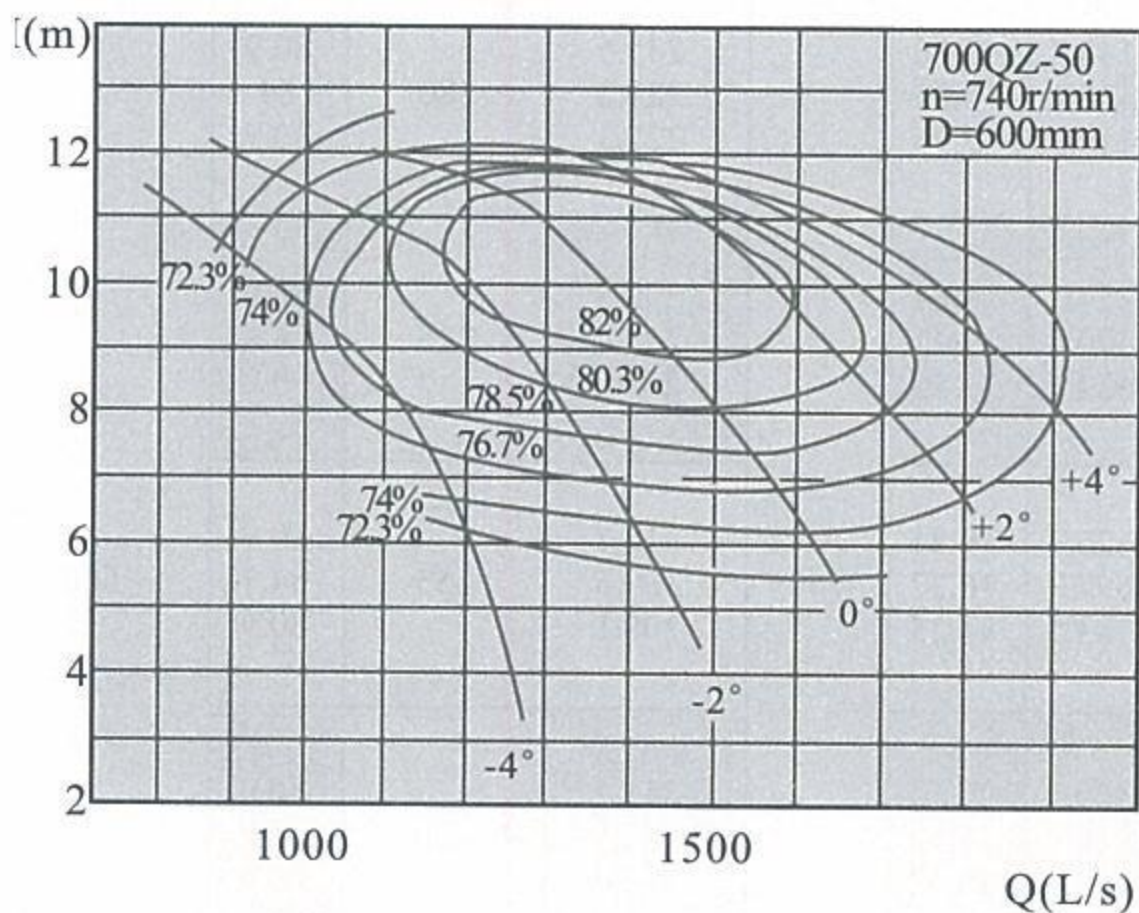

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	3581.3	994.8	9.71	740	122.3	132	77.5	600
	3674.5	1020.7	9.69		121.4		79.9	
	4173.2	1159.2	7.48		109.8		77.5	
-2°	3815.7	1059.9	11.14		149.5	160	77.5	
	4306.5	1196.2	10		141.5		82.9	
	4957.8	1377.2	7.05		123		77.5	
0°	4220.2	1172.3	11.74		174.3	200	77.5	
	4791.5	1331	10.52		163.1		84.2	
	5671.9	1575.5	6.91		137.8		77.5	
+2°	4909.7	1363.8	11.77		203.3	220	77.5	
	5511.7	1531	10.42		186.4		84	
	6308.4	1752.3	7.49		166.2		77.5	
+4°	5438.5	1510.7	11.62	222.3	250	77.5		
	6055.5	1682.1	10.19	209.6		80.2		
	6556.7	1821.3	9.11	210		77.5		

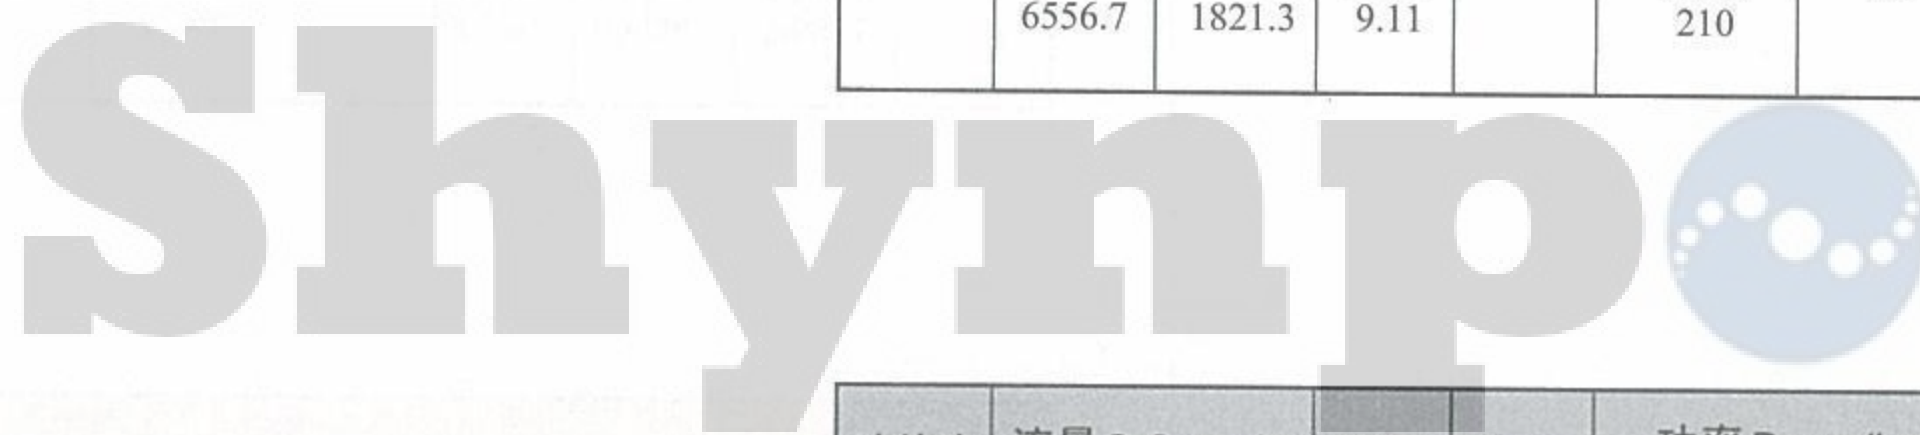


700QZ-75

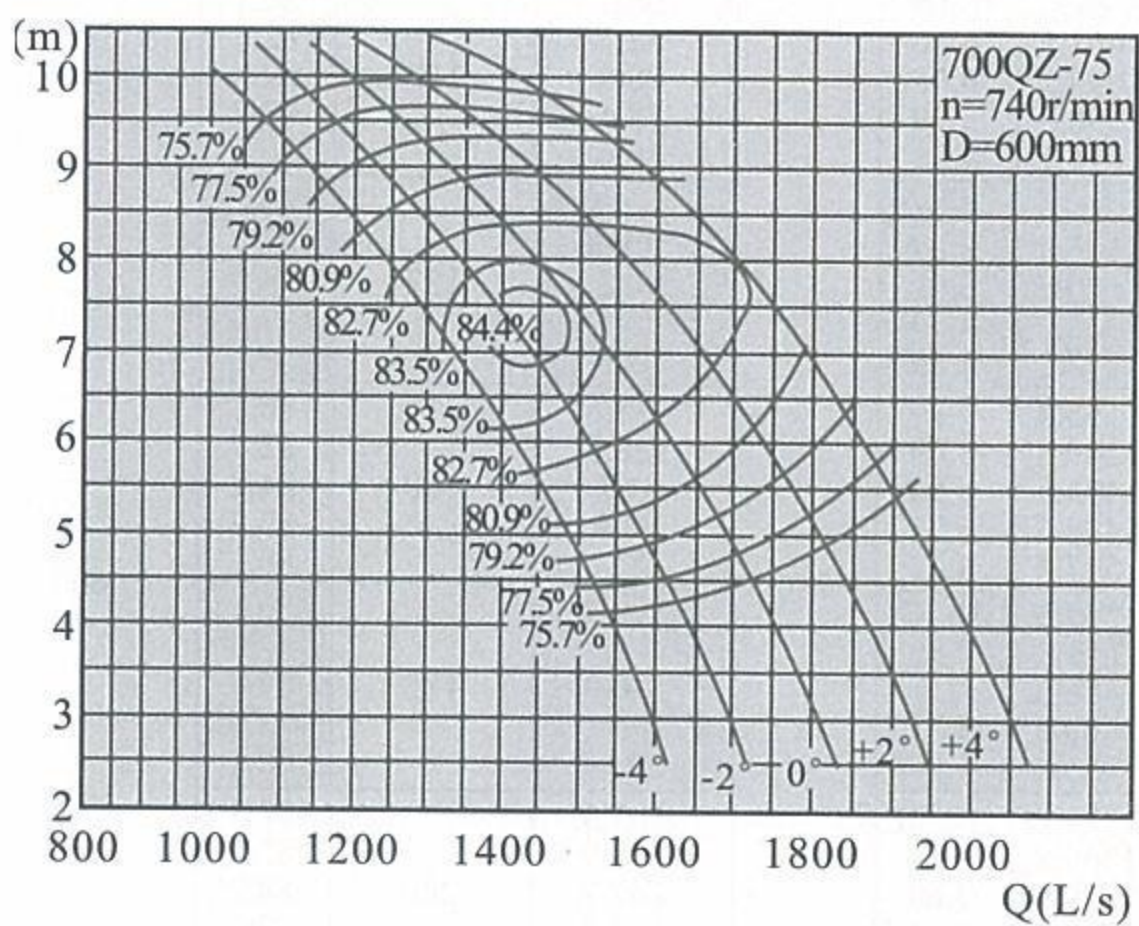

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	4376.2	1215.6	8.44	740	124.3	160	80.9	600
	4988.5	1385.7	6.61		106.8		84	
	5344.2	1484.5	5.24		94.3		80.9	
-2°	4523.9	1256.6	8.75		133.3	185	80.9	
	5207.5	1446.5	7.06		118.4		84.7	
	5660.3	1572.3	5.42		103.3		80.9	
0°	4867.2	1352	8.97		147	200	80.9	
	5451.5	1514.3	7.33		129.9		83.9	
	5940.2	1650	5.76		115.2		80.9	
+2°	5236.7	1454.6	9.05		159.6	185	80.9	
	5833.6	1620.4	7.49		142.9		83.3	
	6275.6	1743.2	6.42		135.6		80.9	
+4°	5784.8	1606.9	9.04	176.1	200	80.9		
	6104.1	1695.6	7.94	159.7		82.7		
	6430.1	1786.1	7.14	154.5		80.9		


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

700QZ-100

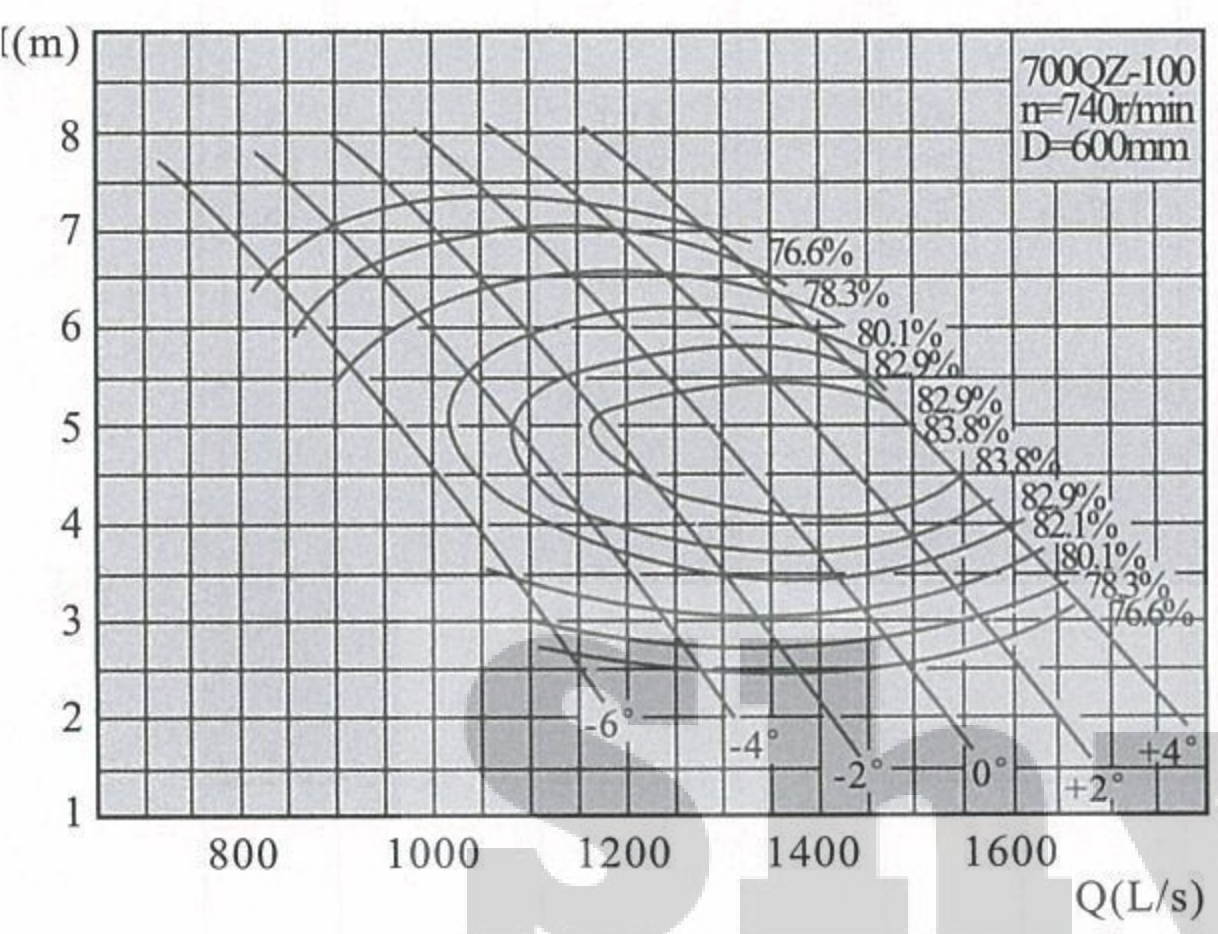


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	3373	937	5.48	740	62.9	75	80.1	600
	3674.5	1020.7	4.2		51.4		81.8	
	3959.6	1099.9	3.39		45.6		80.1	
-4°	3580.9	994.7	6.07		74	90	80.1	
	4115.4	1143.2	4.27		57.9		82.7	
	4494.2	1248.4	3.03		46.4		80.1	
-2°	3832.9	1064.7	6.37		83	110	80.1	
	4482.9	1245.2	4.38		64.2		83.3	
	4892.7	1358.9	3.06		51		80.1	
0°	4106.6	1140.7	6.51		91	110	80.1	
	4850.3	1347.3	4.39		69.4		83.5	
	5243.3	1456.5	3.1		55.4		80.1	
+2°	4483.8	1245.5	6.54	99.8	110	80.1		
	5144.3	1429	4.62	77.1		84		
	5553	1542.5	3.35	63.4		80.1		
+4°	4900.9	1361.4	6.31	105.3	132	80.1		
	5511.7	1531	4.64	83.2		83.7		
	5847.1	1624.2	3.67	73		80.1		

700QZ-135

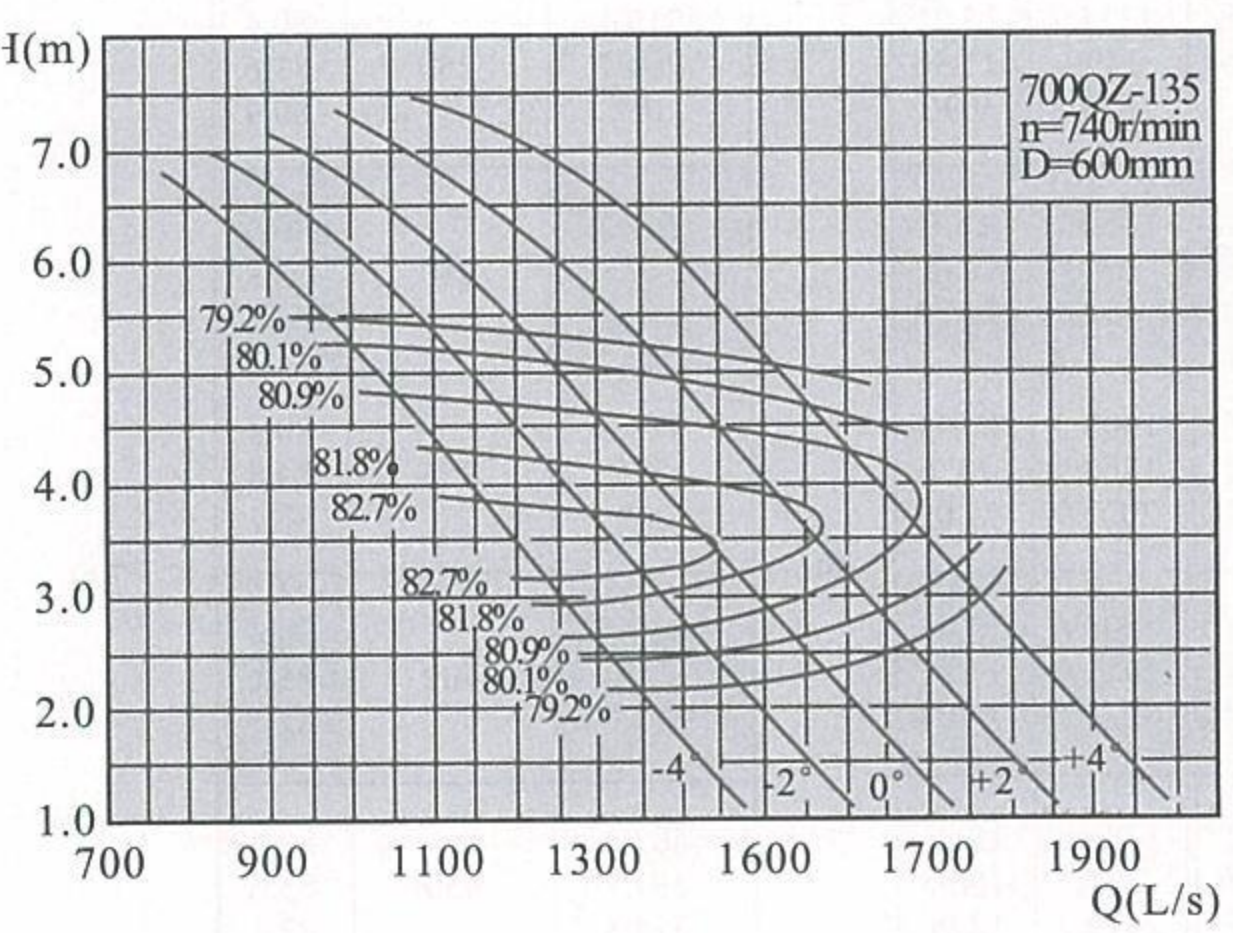

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	3529.1	980.3	5.44	740	66	75	79.2	600
	4559.3	1266.5	3		44.7		83.4	
	4886.6	1357.4	2.16		36.3		79.2	
-2°	3936.7	1093.5	5.39		73	90	79.2	
	4901.8	1361.6	3.21		51.6		83.1	
	5308.3	1474.5	2.28		41.7		79.2	
0°	4346.8	1207.4	5.33		79.8	110	79.2	
	5226.6	1451.8	3.39		58.3		82.7	
	5676.3	1576.8	2.33		45.6		79.2	
+2°	4947	1374.2	5.04		85.8	110	79.2	
	5630.8	1564.1	3.51		65.7		82	
	6062.5	1684	2.57		53.7		79.2	
+4°	5448.1	1513.4	5.07	95.1	110	79.2		
	6062.5	1684	2.57	74.7		81.4		
	6677.1	1844.2	1.87	61.4		79.2		


700QZ-160

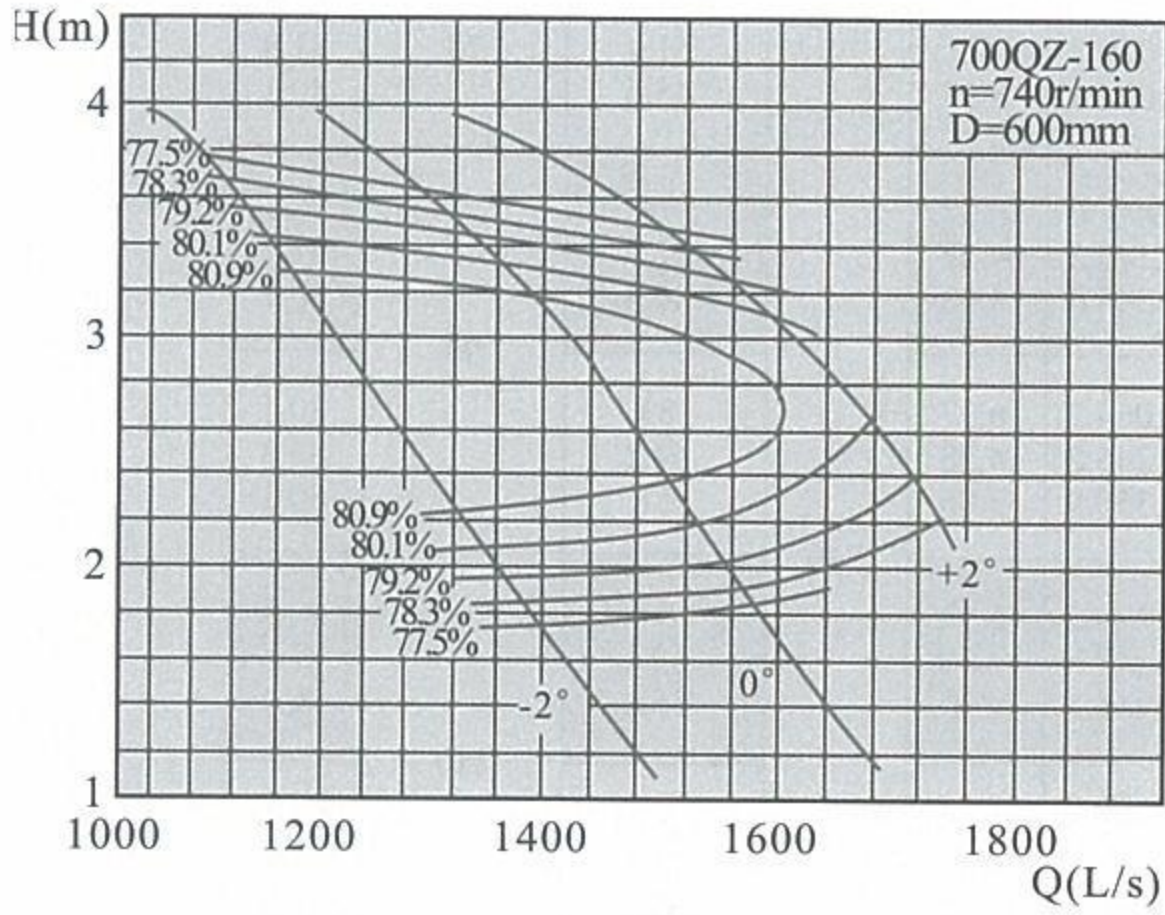

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	3990.2	1108.4	3.68	740	51.1	55	78.3	600
	4556.4	1265.7	2.59		39.2			
	4977.3	1382.6	1.83		31.8			
0°	4713.3	1309.3	3.52		57.7	75	78.3	
	5291.3	1469.8	2.6		46.2		81.4	
	5625.3	1562.6	1.9		37.1		78.3	
+2°	5474	1520.5	3.37		64.1	75	78.3	
	5908.6	1641.3	2.81		56.6		80.1	
	6233.5	1731.5	2.19		47.4		78.3	




800QH-35

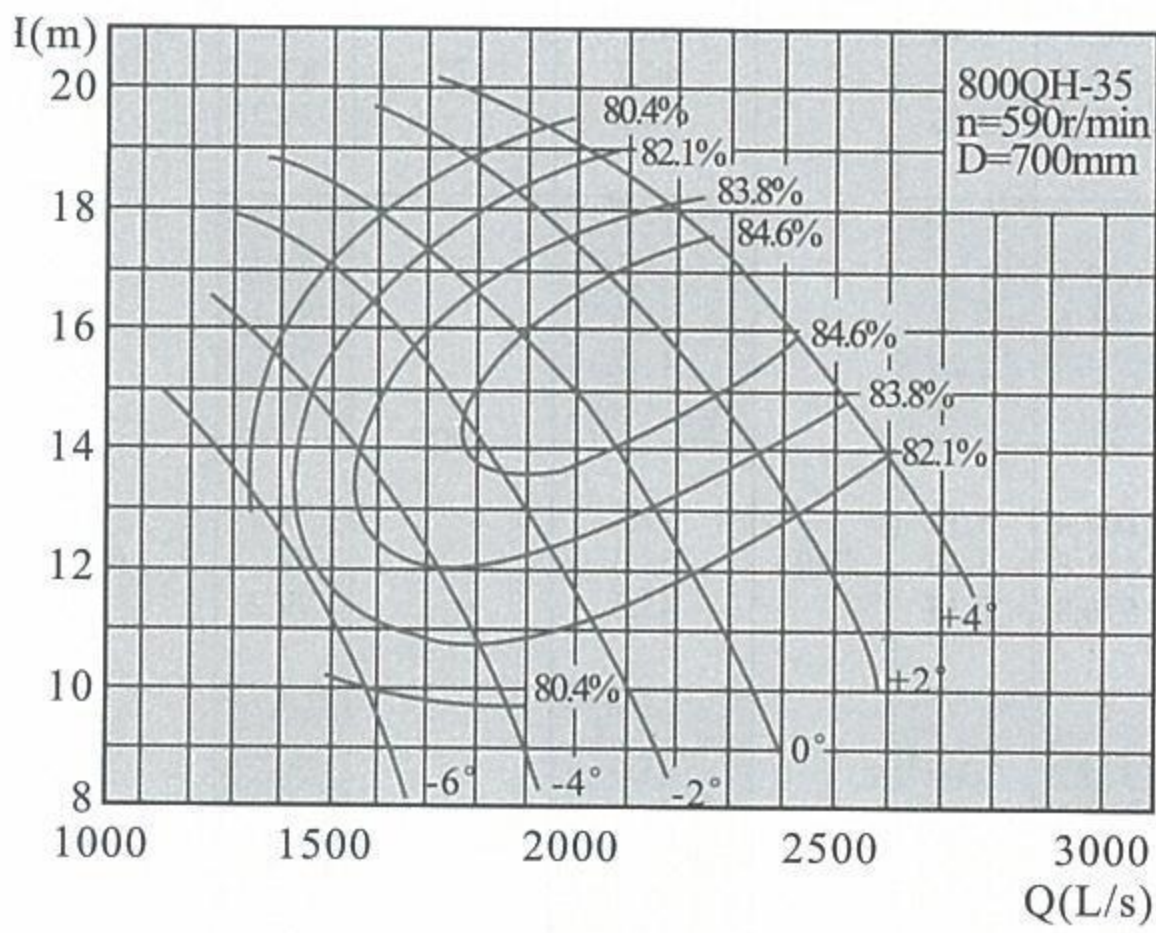

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	4804.8	1334.7	13.21	590	215.1	250	80.4	700
	5396.5	1499	11.36		204.7			
	5685	1579.2	9.96		192		80.4	
-4°	4970.4	1380.7	15.5		261.2	280	80.4	
	6047.8	1680	12.62		247.8		83.9	
	6490.7	1803	10.73		231.1		82.1	
-2°	5422.6	1506.3	17.04		313.2	355	80.4	
	6699.1	1860.9	13.7		295		84.8	
	7307.7	2029.9	11.09		269		82.1	
0°	5783.6	1606.6	17.85		349.9	400	80.4	
	7257.4	2015.9	14.71		342		85.1	
	8001.8	2222.7	11.94		317.3		82.1	
+2°	6418.2	1782.8	18.81		409.3	450	80.4	
	7815.7	2171	15.98		397.7		85.6	
	8710.7	2419.7	12.96		374.8		82.1	
+4°	6980.1	1938.9	19.39	458.8	500	80.4		
	8373.9	2326.1	16.68	447.5		85		
	9324.8	2590.2	13.94	431.7		82.1		


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

00QH-40

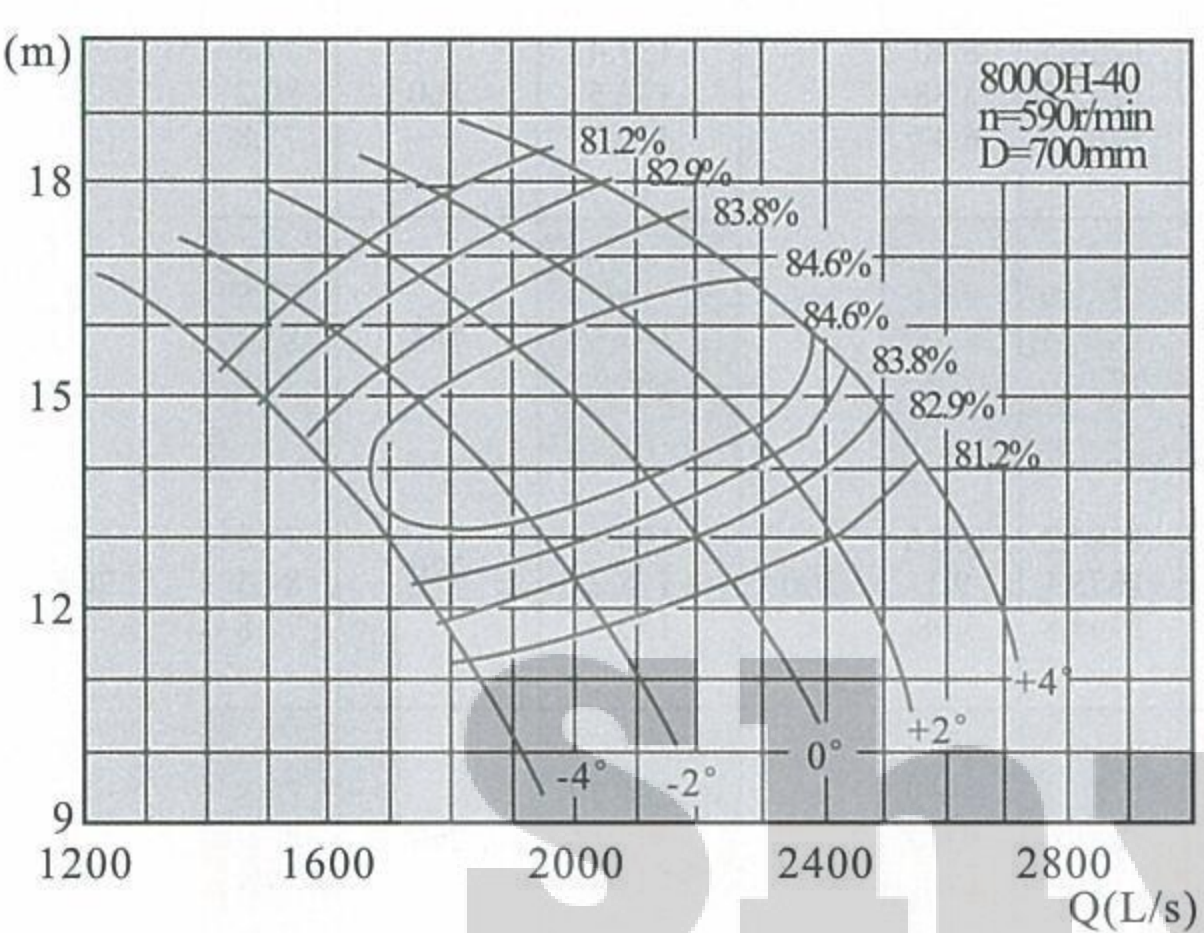


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	5197.4	1443.7	15.37	590	268	315	81.2	700
	6047.8	1680	12.3		240.5			
	6594.9	1831.9	11.21		248.1			
-2°	5581.9	1550.5	16.3		305.2	355	81.2	
	6699.1	1860.9	13.34		387.7			
	7393.3	2053.7	11.73		290.8			
0°	6040.6	1677.9	17.16		347.8	400	81.2	
	7257.4	2015.9	14.51		338			
	8129	2258.1	12.33		336.3			
+2°	6425.4	1784.8	17.78		383.1	450	81.2	
	7815.7	2171	15.5		386.2			
	8701.3	2417	13		379.4			
+4°	6989.8	1941.6	18.38		430.9	500	81.2	
	8373.9	2326.1	16.41		440			
	9229.2	2563.7	14.05		435.1			

00QH-72

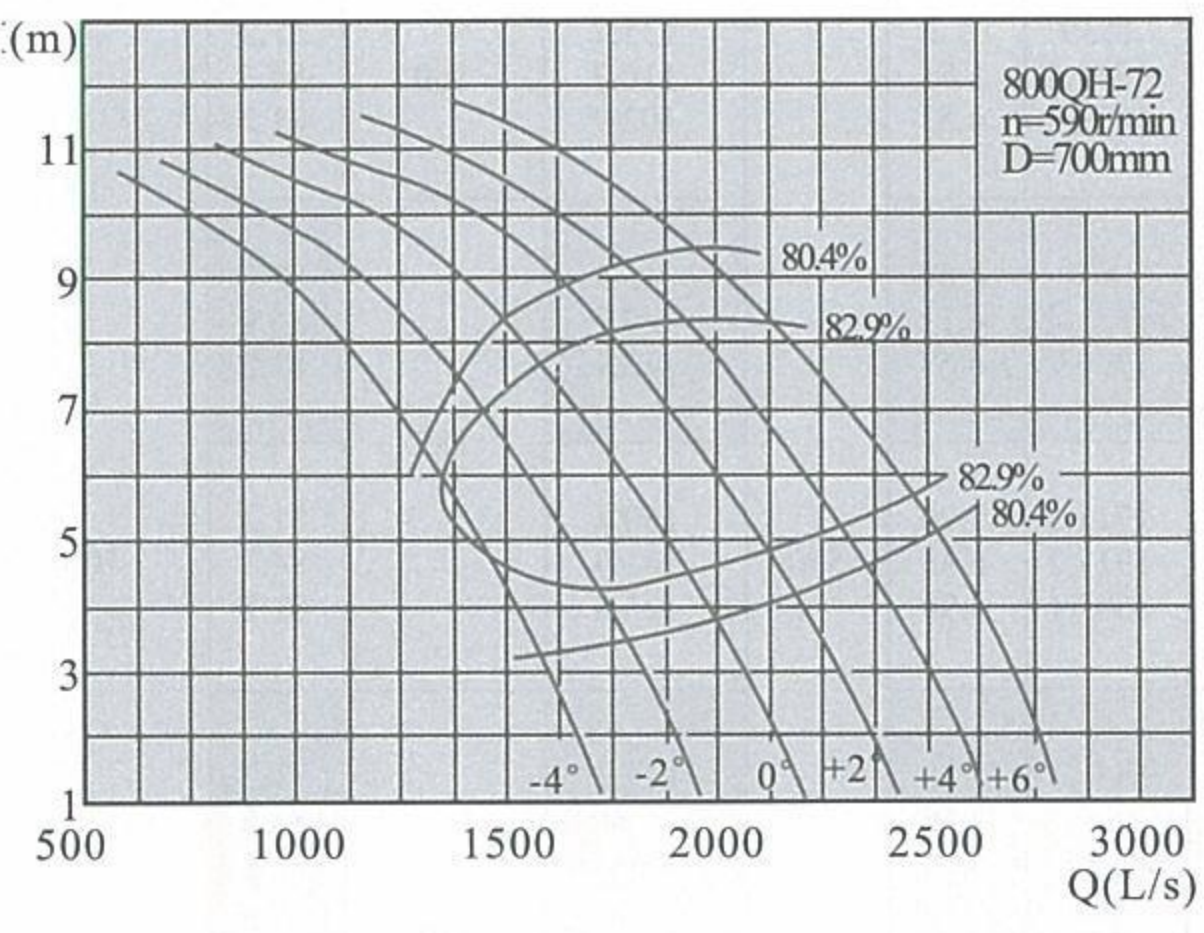


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	4224.2	1173.4	7.48	590	107.1	132	80.4	700
	4838.3	1344	5.68		90.3			
	4987.1	1385.3	5.26		86.1			
	5005.8	1390.5	5.18		85.2			
	5545.4	1540.4	3.52		66.1			
-2°	4633.6	1287.1	8.11		127.4	160	80.4	
	5043	1400.8	7.17		118.7			
	5564	1545.6	5.71		102.9			
	6122.3	1700.6	4.15		83.4			
	6345.6	1762.7	3.34		71.7			
0°	5266.3	1462.9	8.47		151.3	185	80.4	
	5694.3	1581.7	7.52		140.6			
	6401.4	1778.2	5.66		116.9			
	6810.8	1891.9	4.51		100.9			
	7052.7	1959.1	3.7		88.4			
+2°	5731.5	1592.1	9.02		175.3	200	80.4	
	6066.4	1685.1	8.38		167.1			
	6866.6	1907.4	6.49		143			
	7611	2114.2	4.51		112.7			
	7908.7	2196.9	3.79		101.5			
+4°	6252.5	1736.8	9.33		197.8	220	80.4	
	6699.1	1860.9	8.53		187.7			
	7517.9	2088.3	6.65		161.3			
	8187.8	2274.4	4.96		133.4			
	8560	2377.8	4.06		117.7			
+6°	6885.2	1912.6	9.46	220.9		80.4		
	7443.5	2067.6	8.29	202.8				


800QZ-50

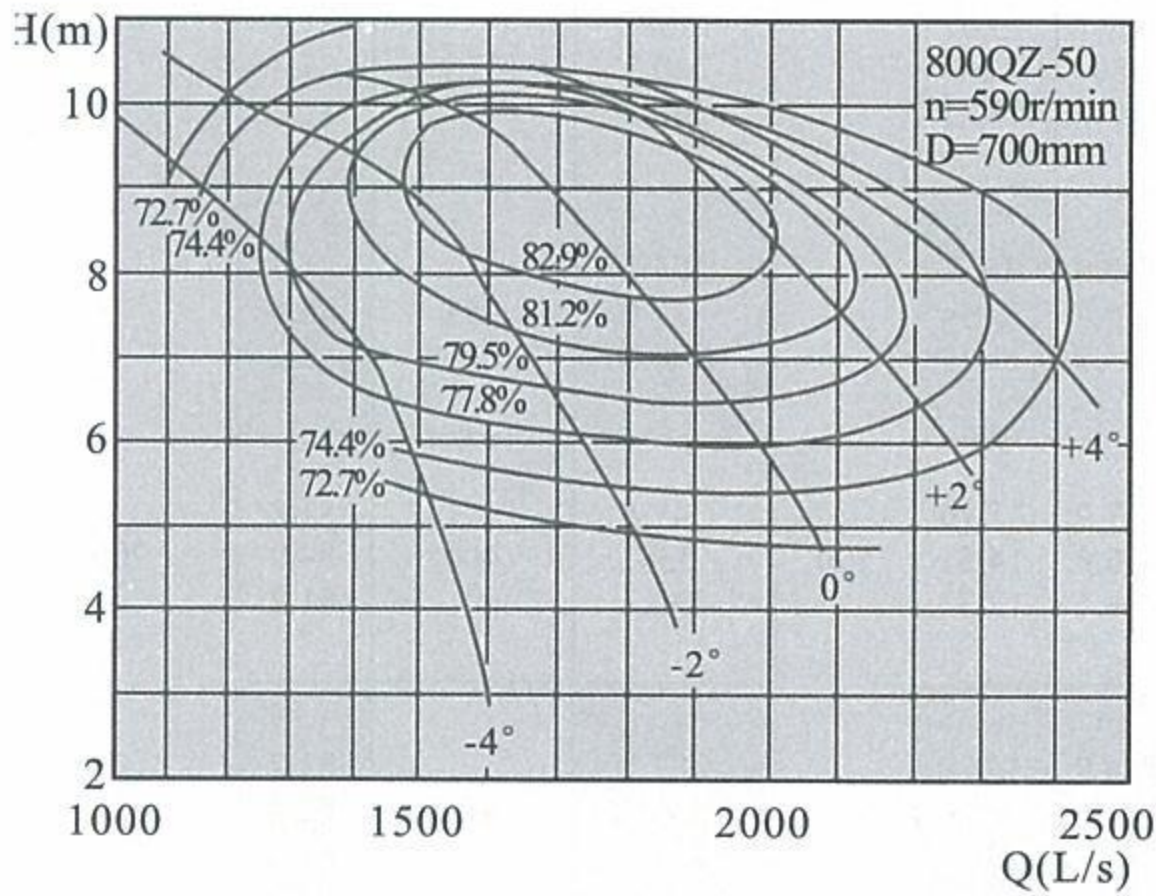

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	4534.2	1259.5	8.40	590	133.4	160	77.8	700
	4652.2	1292.3	8.38		132.5		80.2	
	5283.6	1467.7	6.47		119.7		77.8	
-2°	4831	1341.9	9.64		163	185	77.8	
	5452.4	1514.5	8.65		154.5		83.2	
	6276.9	1743.6	6.1		134.1		77.8	
0°	5343.1	1484.2	10.16		190.1	220	77.8	
	6066.4	1685.1	9.1		178.2		84.5	
	7181.1	1994.8	5.98		150.3		77.8	
+2°	6216.1	1726.7	10.19		221.7	250	77.8	
	6978.3	1938.4	9.01		203.5		84.2	
	7986.9	2218.6	6.48		181.3		77.8	
+4°	6885.6	1912.7	10.05	242.3	280	77.8		
	7666.8	2129.7	8.82	228.6		80.6		
	8301.4	2305.9	7.88	229		77.8		

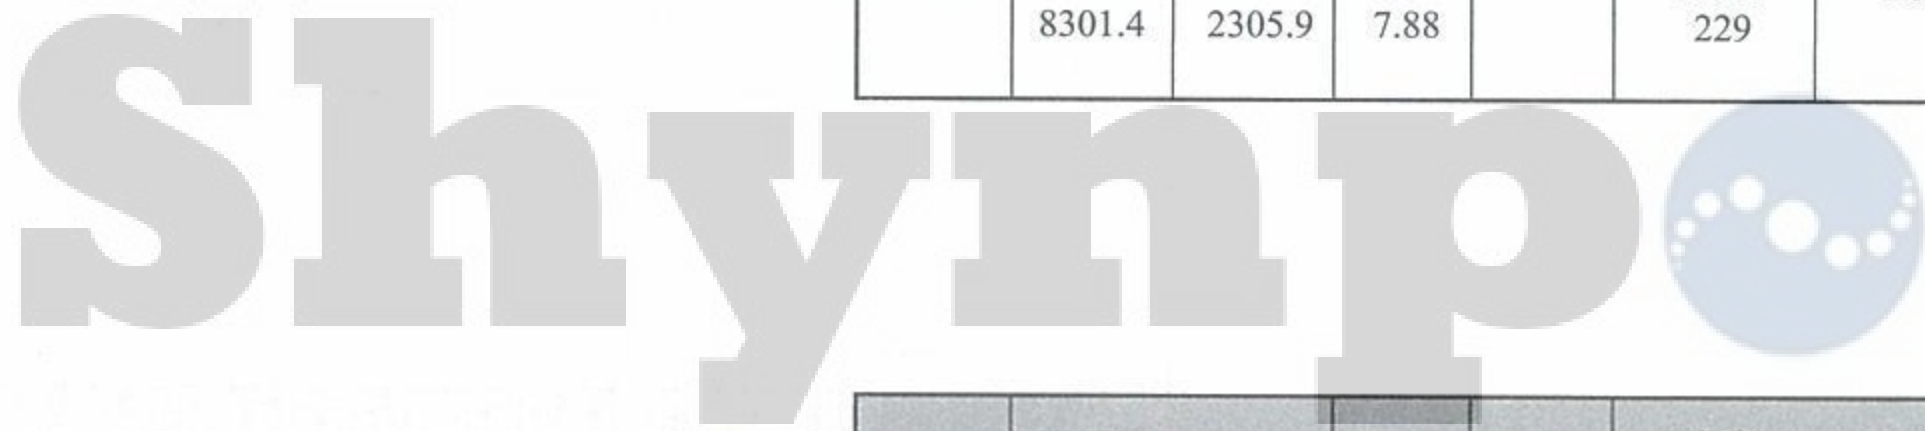


300QZ-75

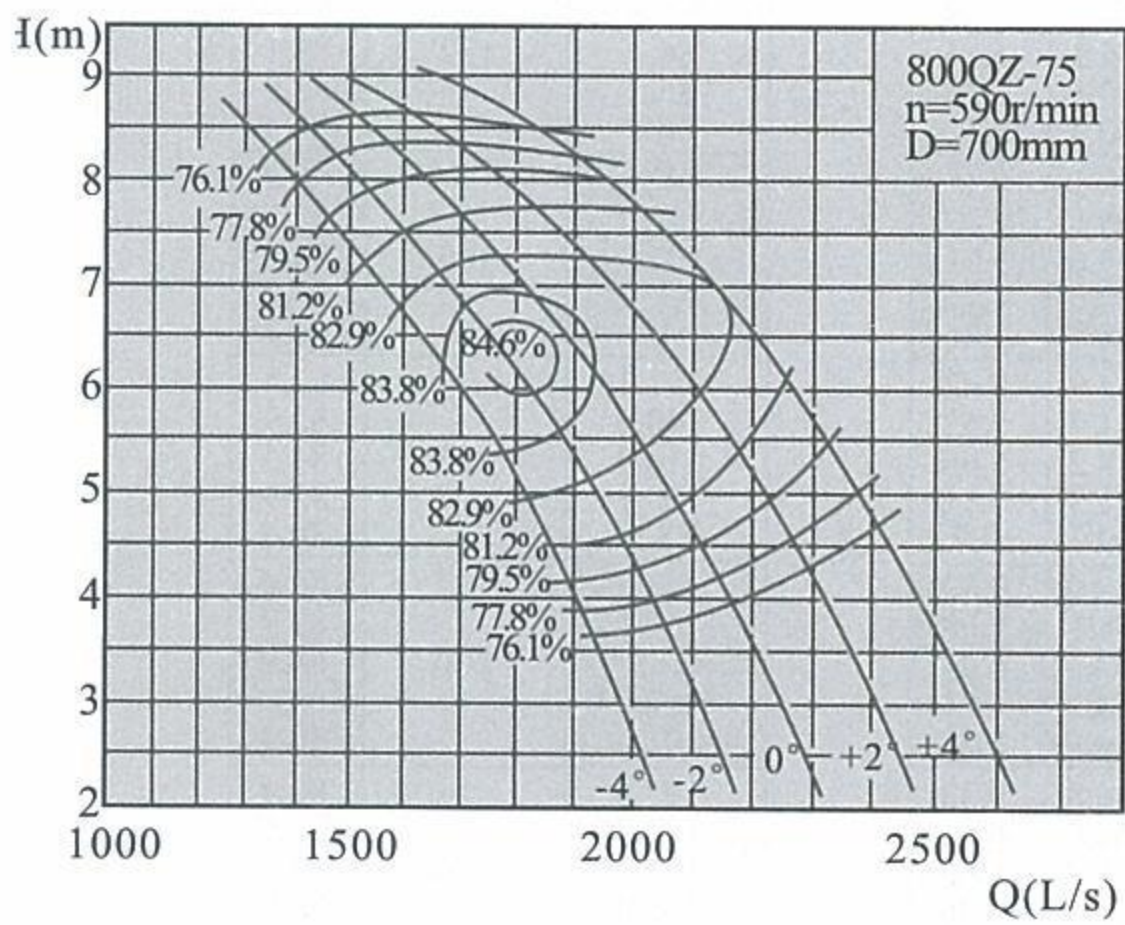

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	5540.6	1539	7.3	590	135.7	160	81.2	700
	6315.8	1754.4	5.71		116.7		84.3	
	6766.1	1879.5	4.53		102.9		81.2	
-2°	5727.6	1591	7.57		145.5	185	81.2	
	6593.1	1831.4	6.11		129.3		84.9	
	7166.4	1990.7	4.69		112.7		81.2	
0°	6162.3	1711.7	7.76		160.4	220	81.2	
	6902	1917.2	6.35		141.9		84.1	
	7520.7	2089.1	4.98		125.8		81.2	
+2°	6630.1	1841.7	7.83		174.2	250	81.2	
	7385.8	2051.6	6.48		156		83.6	
	7945.4	2207	5.55		148		81.2	
+4°	7324	2034.5	7.82	192.2	280	81.2		
	7728.2	2146.7	6.87	174.3		83		
	8140.9	2261.4	6.17	168.6		81.2		


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

300QZ-100

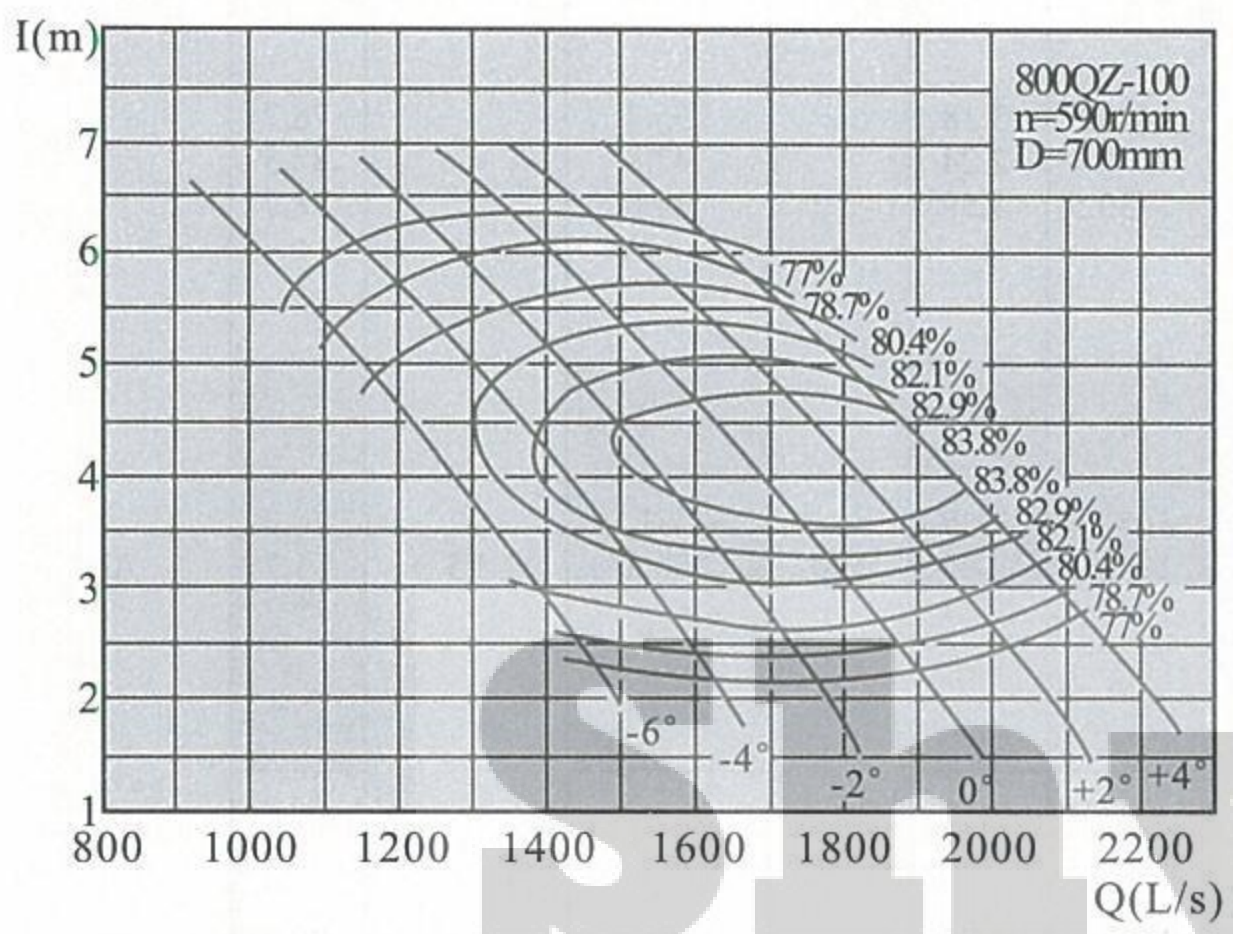


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	4270.5	1186.3	4.74	590	68.6	75	80.4	700
	4652.2	1292.3	3.63		56.1		82.1	
	5013.2	1392.6	2.93		49.8		80.4	
-4°	4533.6	1259.3	5.26		80.8	90	80.4	
	5210.4	1447.3	3.7		63.2		83	
	5690	1580.6	2.62		50.6		80.4	
-2°	4852.8	1348	5.51		90.6	110	80.4	
	5675.7	1576.6	3.79		70.1		83.5	
	6193.7	1720.5	2.65		55.6		80.4	
0°	5199.3	1444.2	5.63		99.3	132	80.4	
	6140.9	1705.8	3.79		75.8		83.8	
	6638.5	1844	2.69		60.5		80.4	
+2°	5676.8	1576.9	5.66	108.9	132	80.4		
	6513.1	1809.2	3.99	84.2		84.2		
	7030.6	1952.9	2.9	69.2		80.4		
+4°	6204.9	1723.6	5.46	114.9	132	80.4		
	6978.3	1938.4	4.01	90.8		84		
	7402.9	2056.4	3.17	79.6		80.4		

300QZ-135

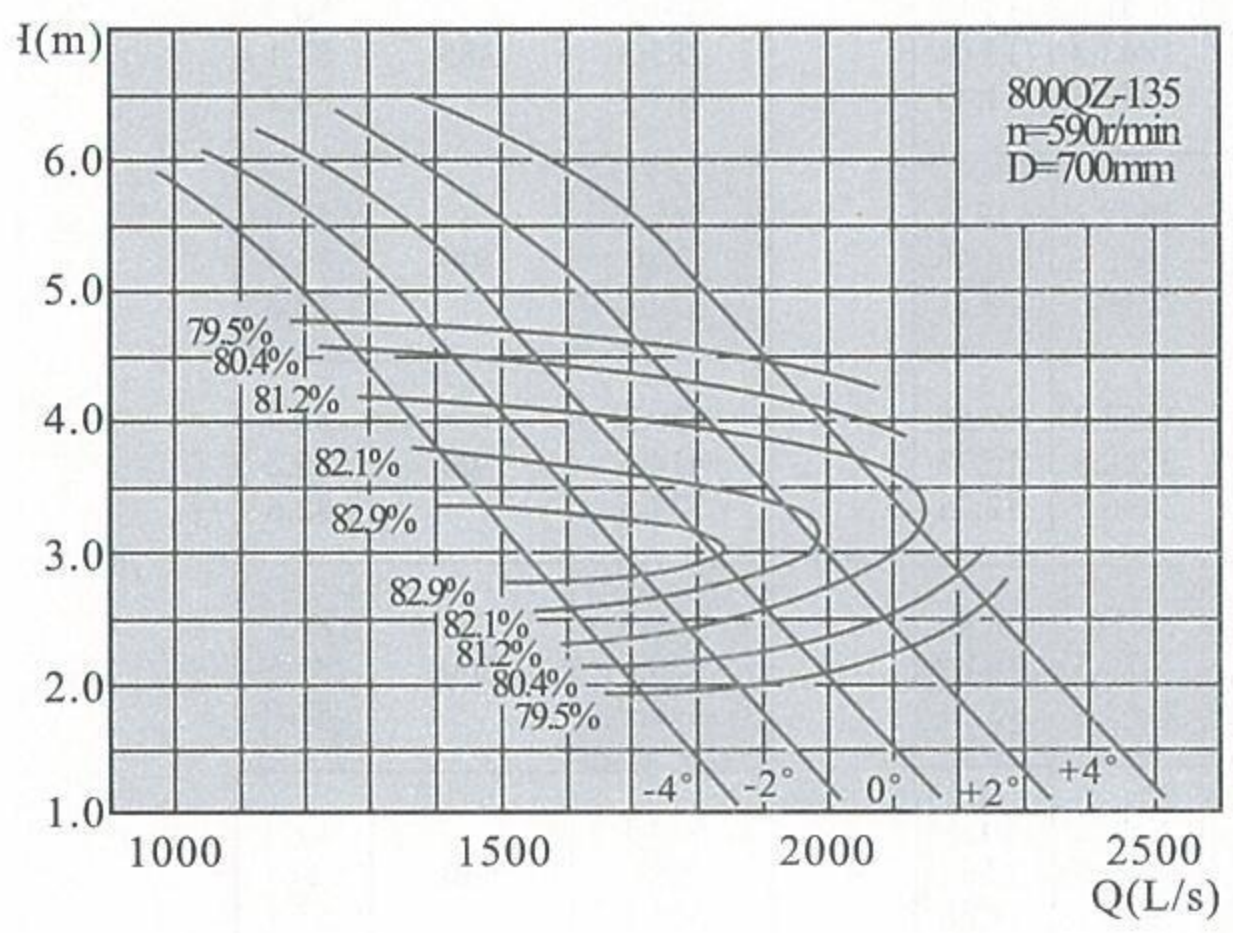

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	4468.1	1241.2	4.71	590	72	90	79.5	700
	5772.4	1603.5	2.6		48.8		83.6	
	6186.8	1718.6	1.87		39.6		79.5	
-2°	4984.2	1384.5	4.66		79.6	110	79.5	
	6206	1723.9	2.78		56.3		83.3	
	6720.7	1866.9	1.97		45.5		79.5	
0°	5503.3	1528.7	4.62		87	110	79.5	
	6617.3	1838.1	2.93		83.6		83	
	7186.7	1996.3	2.02		49.7		79.5	
+2°	6263.3	1739.8	4.36		93.6	132	79.5	
	7129	1980.3	3.04		71.7		82.3	
	7675.5	2132.1	2.23		58.6		79.5	
+4°	6897.7	1916	4.39	103.8	132	79.5		
	7621.4	2110	3.2	81.5		81.7		
	8110	2250	2.2	61.7		79.5		


800QZ-160

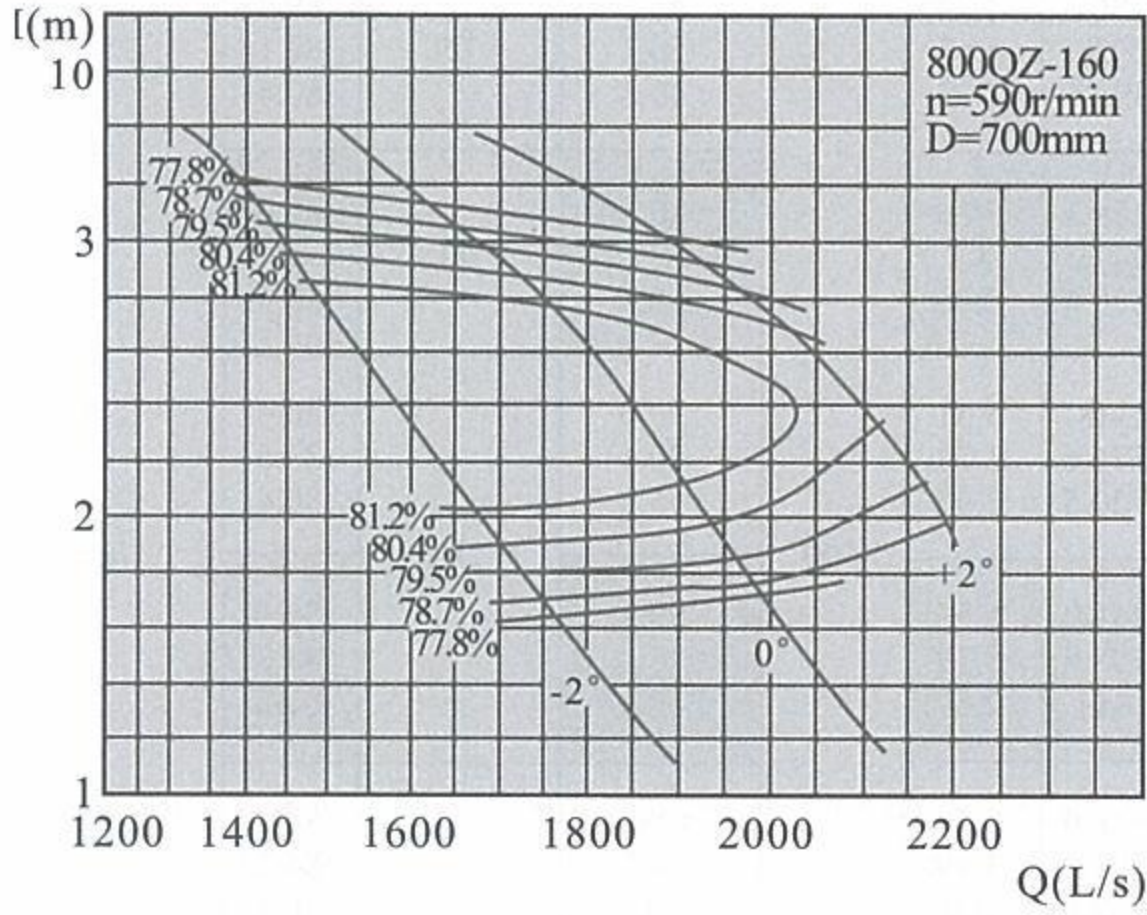

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	5051.9	1403.3	3.18	590	55.7	75	78.7	700
	5768.7	1602.4	2.24		42.8		82.5	
	6301.7	1750.5	1.59		34.6		78.7	
0°	5967.4	1657.6	3.05		63		78.7	
	6699.1	1860.9	2.25		50.4		81.7	
	7122.1	1978.4	1.64		40.5		78.7	
+2°	6930.5	1925.1	2.91		69.9		78.7	
	7480.7	2078	2.43		61.7		80.4	
	7892.2	2192.3	1.89		51.7		78.7	




900QH-35G

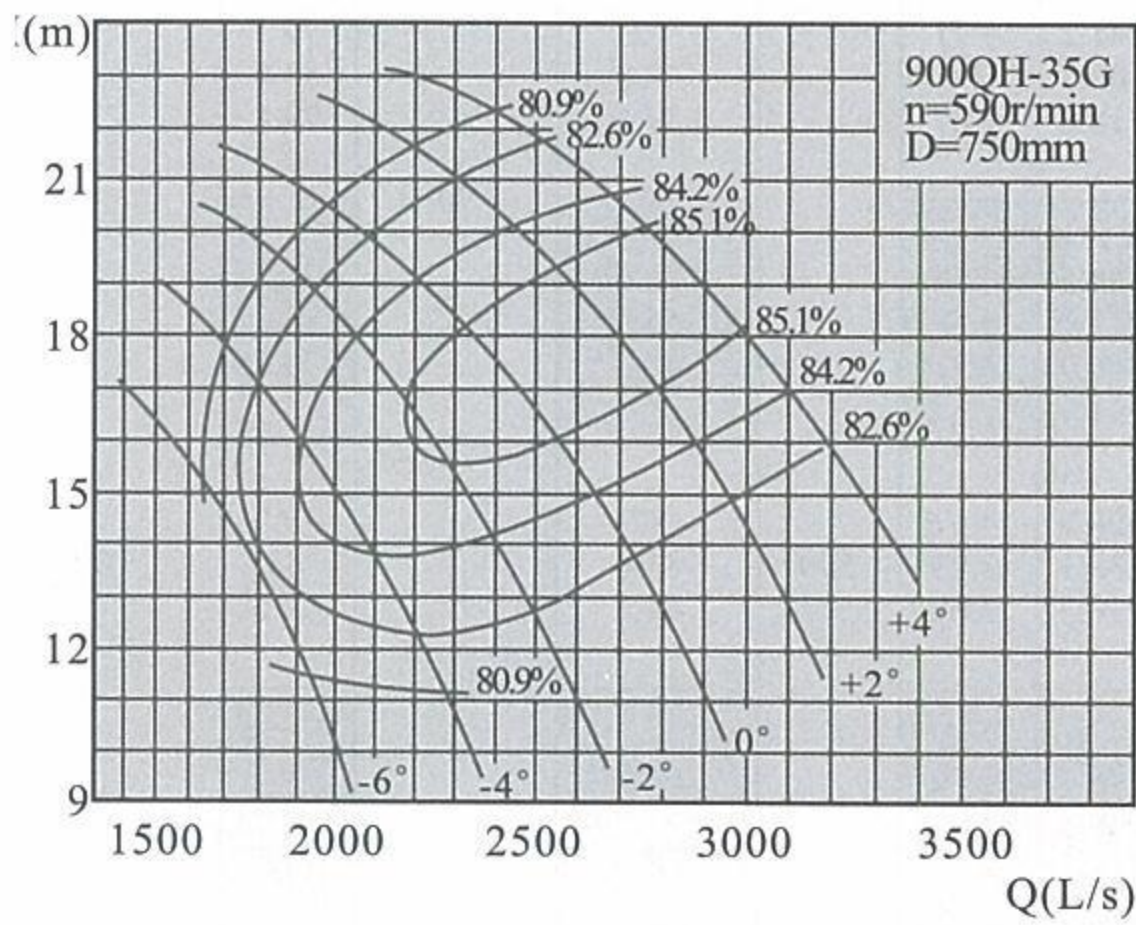

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-6°	5909.7	1641.6	15.16	590	301.7	355	80.9	750	
	6637.5	1843.8	13.04		287.3		82.1		
	6992.3	1942.3	11.43		269.3		80.9		
-4°	6113.4	1698.2	17.8		366.4		400		80.9
	7438.6	2066.3	14.49		348				84.4
	7983.3	2217.6	12.31		324.4				82.6
-2°	6669.5	1852.7	19.56		439.3		500		80.9
	8239.7	2288.8	15.73		414.6				85.2
	8988.1	2496.7	12.73		377.5				82.6
0°	7113.6	1976	20.49	490.8	560	80.9			
	8926.3	2479.5	16.89	480.6		85.5			
	9841.8	2733.8	13.71	445.3		82.6			
+2°	7894	2192.8	21.6	574.1	630	80.9			
	9612.9	2670.3	18.35	559		86			
	10713.8	2976.1	14.88	526.1		82.6			
+4°	8585.3	2384.8	22.26	643.5	710	80.9			
	10299.6	2861	19.14	628.8		85.4			
	11469.1	3185.9	16.01	605.9		82.6			


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

900QH-35D

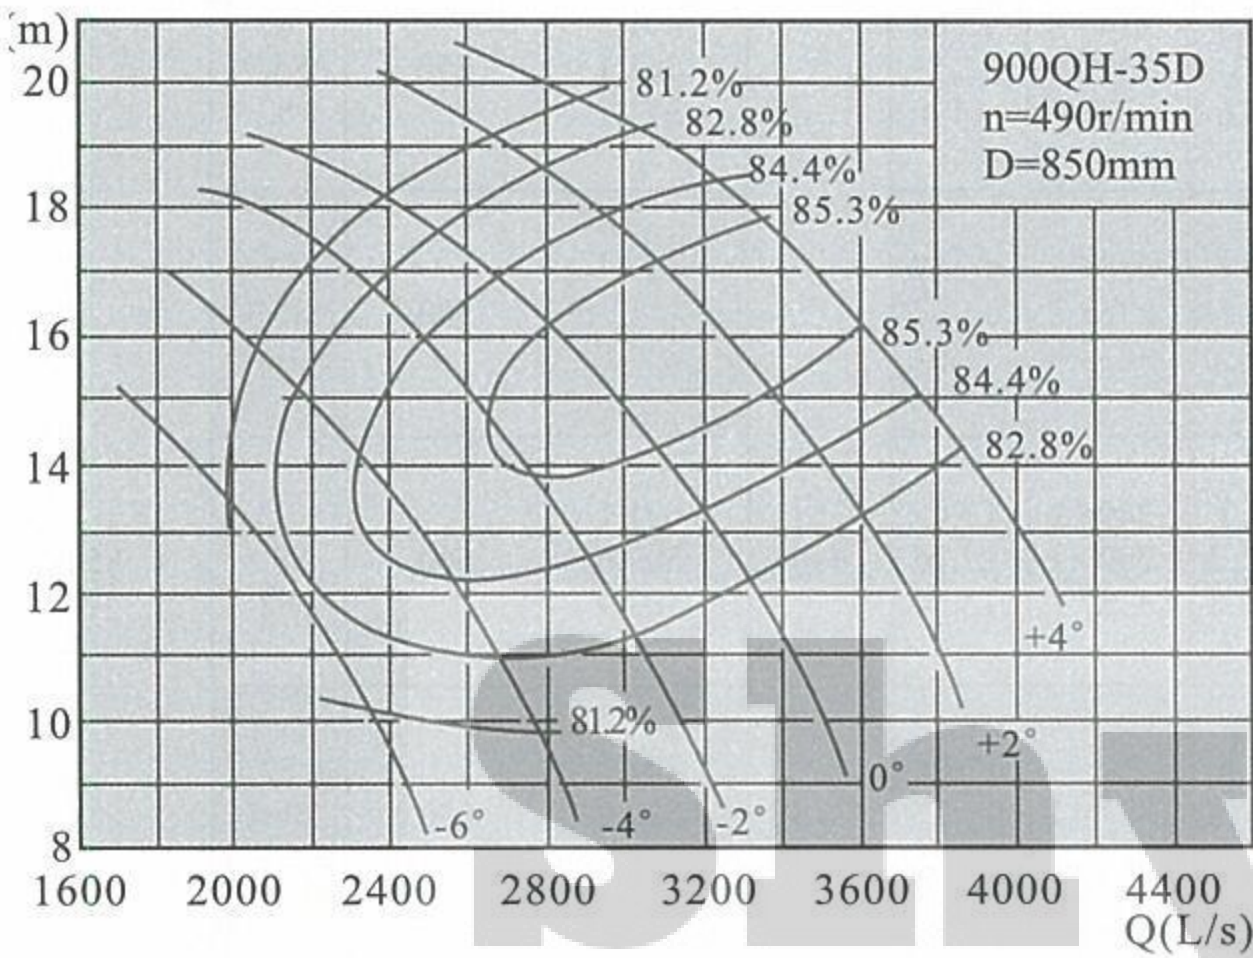


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-6°	7144.6	1984.6	13.43	490	322.2	355	81.2	850	
	8024.6	2229	11.55		306.8		82.3		
	8453.5	2348.2	10.13		287.5		81.2		
-4°	7390.9	2053	15.77		391.3	450	81.2		850
	8993	2498.1	12.83		371.9		84.6		
	9651.6	2681	10.91		346.5		82.8		
-2°	8063.3	2239.8	17.33		469.1	560	81.2		850
	9961.5	2767.1	13.93		443		85.4		
	10866.4	3018.4	11.28		403.3		82.8		
0°	8600.1	2388.9	18.15		524.1	630	81.2		850
	10791.7	2997.7	14.96		513.7		85.7		
	11898.5	3305.1	12.15		475.7		82.8		
+2°	9543.7	2651	19.13	613.1	710	81.2	850		
	11621.8	3228.3	16.25	597.5		86.2			
	12952.8	3598	13.18	562		82.8			
+4°	10379.4	2883.2	19.72	687.2	800	81.2	850		
	12451.9	3458.9	16.96	672		85.6			
	13865.9	3851.6	14.18	647.2		82.8			

900QH-40G

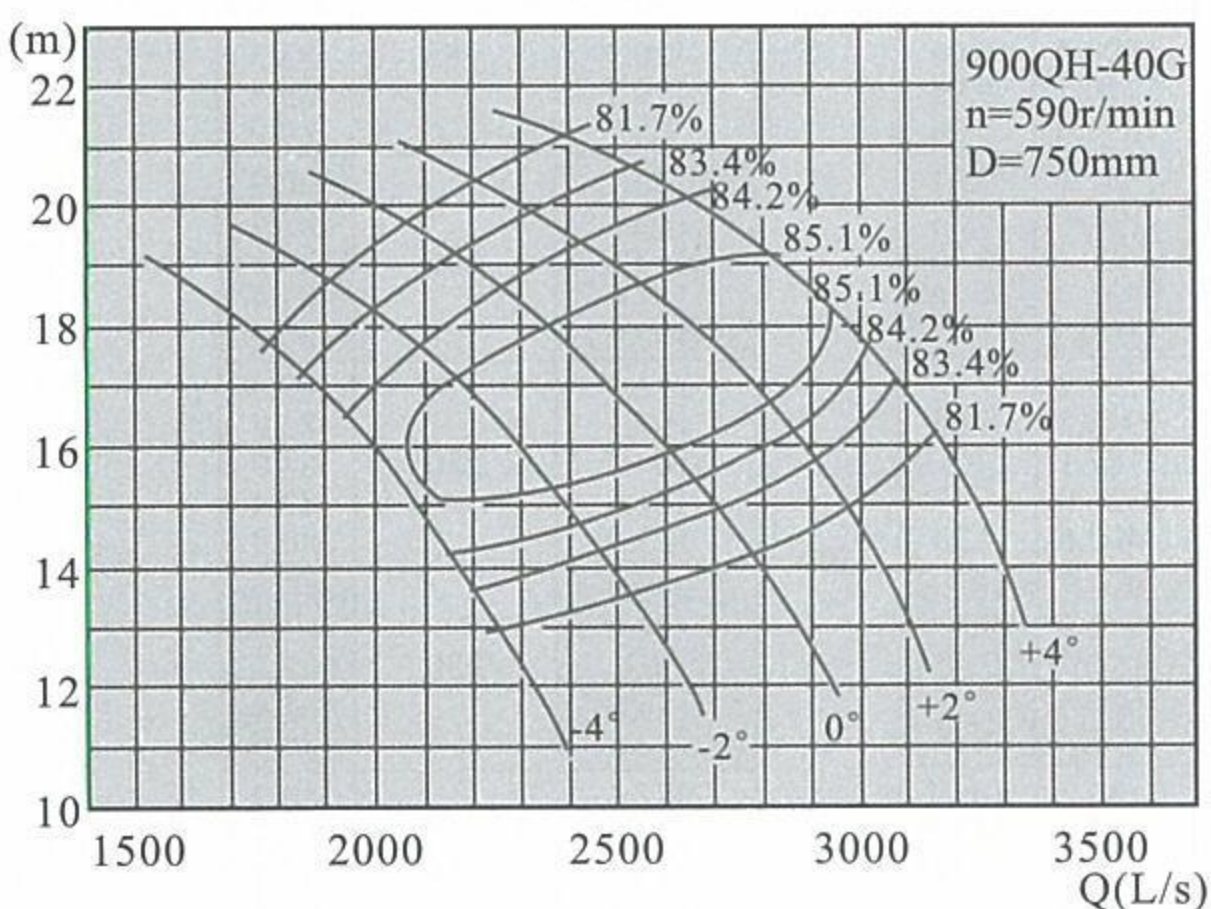


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	6392.6	1775.7	17.64	590	376	450	81.7	750	
	7438.6	2066.3	14.12		337.9		84.7		
	8111.5	2253.2	12.87		348.1		81.7		
-2°	6865.5	1907.1	18.71		428.2	500	81.7		750
	8239.7	2288.8	15.31		404.2		85.1		
	9096.4	2525.9	13.46		408.1		81.7		
0°	7429.7	2063.8	19.7		488	560	81.7		750
	8926.3	2479.5	16.66		475		85.3		
	9998.4	2777.3	14.16		471.8		81.7		
+2°	7903	2195.3	20.41		537.6	630	81.7		750
	9612.9	2670.3	17.8		542.8		85.9		
	10702.2	2972.8	14.92		532.3		81.7		
+4°	8597.2	2388.1	21.1	604.7	710	81.7	750		
	10799.6	2861	18.83	618.4		85.5			


900QH-40D

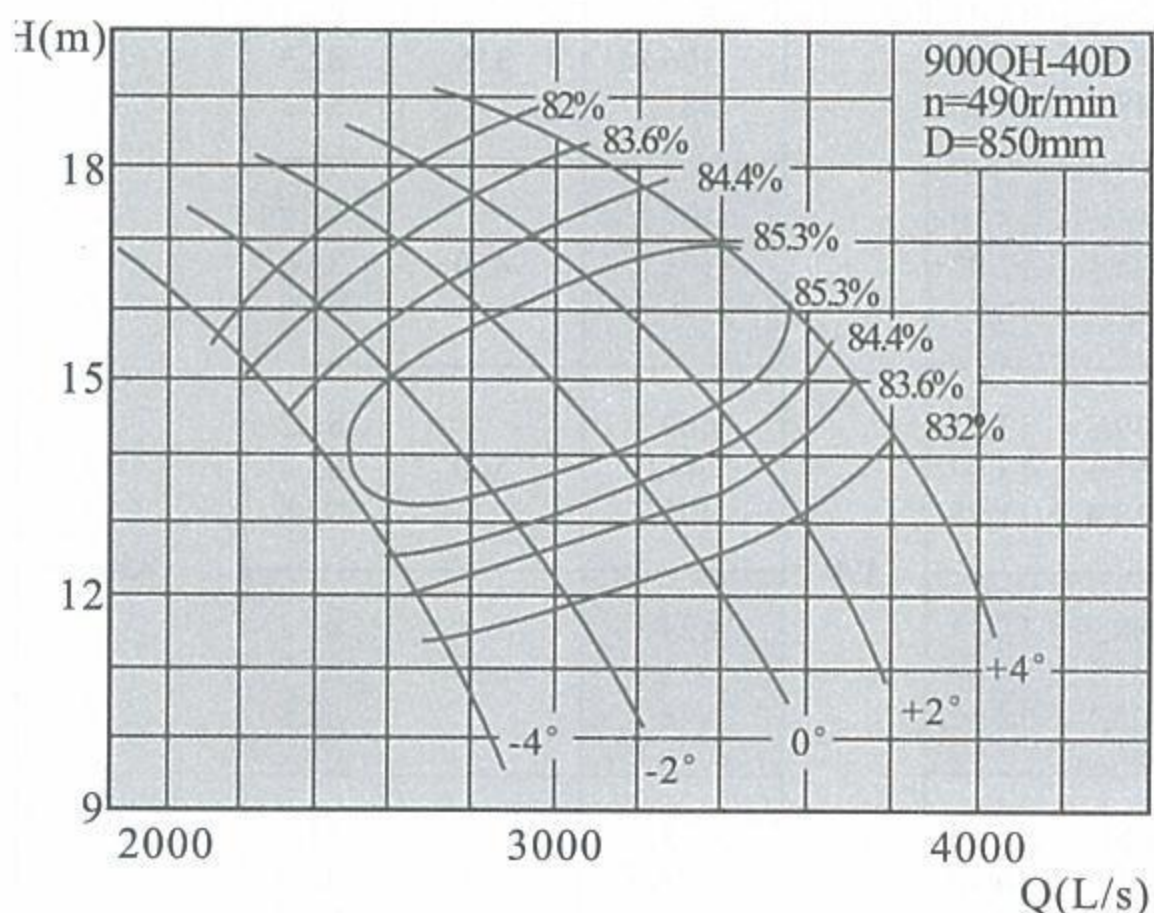

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	7728.5	2146.8	15.63	490	401.5	450	82	850
	8993	2498.1	12.51		361.1			
	9806.6	2724	11.4		371.7			
-2°	8300.2	2305.6	16.57		457.3	500	82	
	9961.5	2767.1	13.57		432			
	10993.7	3053.8	11.93		435.8			
0°	8982.3	2495.1	17.45		521.1	560	82	
	10791.7	2997.7	17.76		507.6			
	12087.8	3357.7	12.54		503.9			
+2°	9554.5	2654	18.08		574.1	630	82	
	11621.8	3228.3	15.77		580.1			
	12938.6	3594.1	13.22		568.5			
+4°	10393.8	2887.2	18.69	645.8	710	82		
	12451.9	3458.9	16.68	660.9				
	13723.7	3812.1	14.29	652				

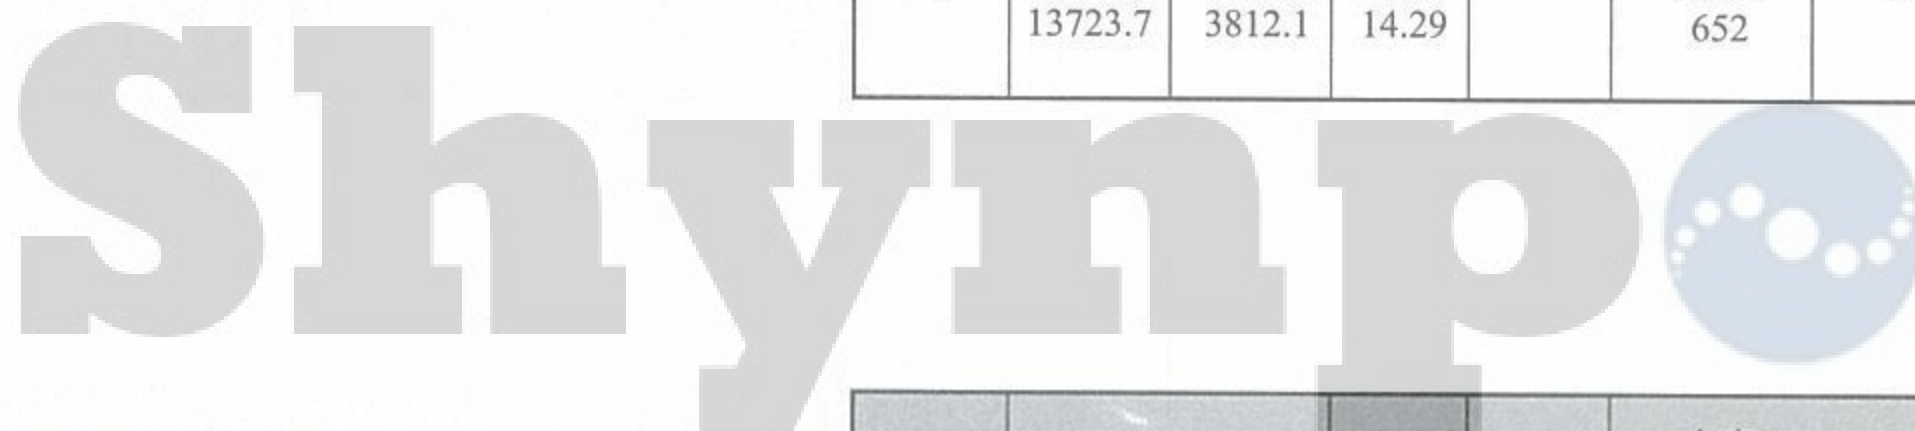


900QH-72G

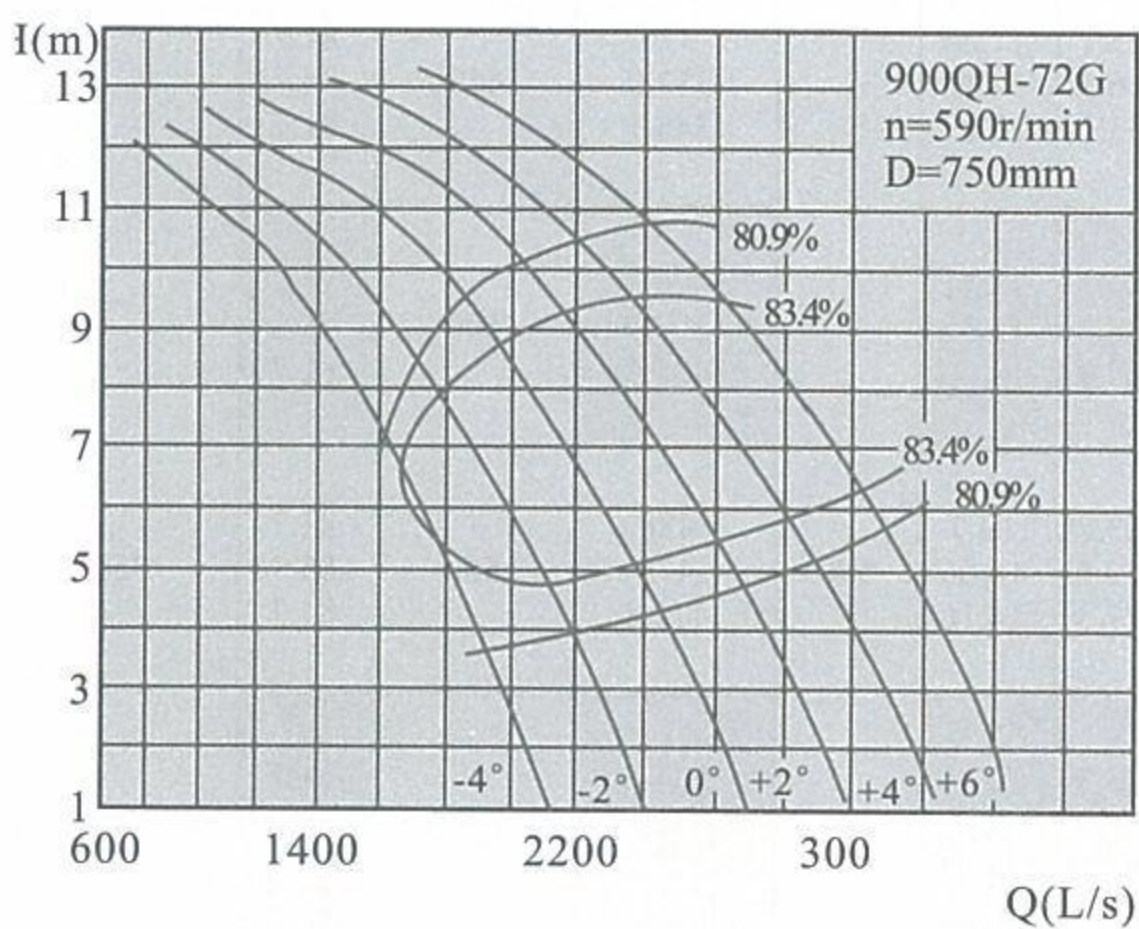

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	5195.6	1443.2	8.59	590	150.3	185	80.9	750
	5950.9	1653	6.52		126.7			
	6134	1703.9	6.04		120.9			
	6156.9	1710.2	5.95		119.7			
	6820.6	1894.6	4.04		92.7			
-2°	5699.1	1583.1	9.31		178.7	200	80.9	
	6202.6	1723	8.23		166.7			
	6843.5	1901	6.56		144.6			
	7530.1	2091.7	4.76		117.1			
	7804.8	2168	3.83		100.6			
0°	6477.3	1799.2	9.73		212.2	250	80.9	
	7003.7	1945.5	8.65		197.5			
	7873.4	2187.1	6.5		164.2			
	8377	2326.9	5.17		141.6			
	8674.5	2409.6	4.24		123.9			
+2°	7049.5	1958.2	10.36	245.9	280	80.9		
	7461.5	2072.6	9.62	234.6				
	8445.6	2346	7.45	201				
	9361.2	2600.3	5.17	158.2				
	9727.4	2702	4.35	142.4				
+4°	7690.3	2136.2	10.71	277.4	315	80.9		
	8239.7	2288.8	9.79	263.5				
	9246.7	2568.5	7.64	226.6				
	10070.7	2797.4	5.69	187.3				
	10528.4	2924.6	4.66	165.1				
+6°	8468.5	2352.4	10.87	309.9	355	80.9		
	9155.2	2543.1	9.52	284.8				
	9818.9	2727.5	8.42	266.4				
	10757.3	2988.1	6.42	225.5				
	10986.2	3051.7	5.79	214.4				


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

900QH-72D

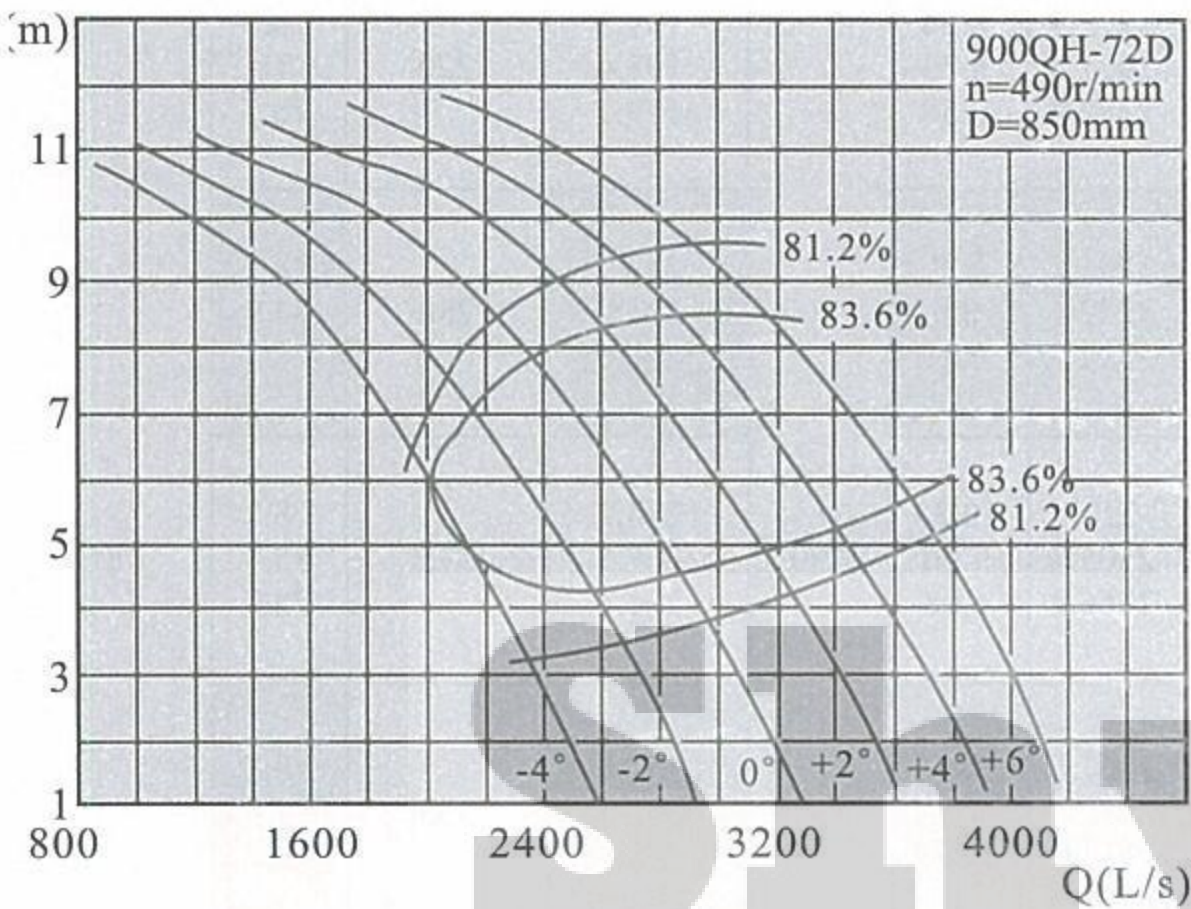


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	6281.3	1744.8	7.61	490	160.5	185	81.2	850
	7194.4	1998.5	5.78		135.4			
	7415.8	2059.9	5.35		129.2			
	7443.5	2067.6	5.27		127.9			
	8245.9	2290.5	3.58		99			
-2°	6890.1	1913.9	8.25		190.9	220	81.2	
	7498.8	2083	7.29		178.1			
	8273.6	2298.2	5.81		154.5			
	9103.7	2528.8	4.22		125.1			
	9435.8	2621.1	3.39		107.5			
0°	7830.9	2175.2	8.62		226.6	250	81.2	
	8467.3	2352	7.65		211			
	9518.8	2644.1	5.76		175.5			
	10127.6	2813.2	4.58		151.3			
	10487.6	2913.1	3.76		132.3			
+2°	8522.6	2367.4	9.18	262.6	315	81.2		
	9020.7	2505.8	8.53	250.6				
	10210.6	2836.3	6.6	214.8				
	11317.4	3143.7	4.58	169.1				
	11760.1	3266.7	3.85	152				
+4°	9297.4	2582.6	9.49	296.2	355	81.2		
	9961.5	2767.1	8.67	281.5				
	11179.1	3105.3	6.77	242.2				
	12175.2	3382	5.04	200.1				
	12728.6	3535.7	4.13	176.3				
+6°	10238.2	2844	9.63	330.9		81.2		
	11068.4	3074.5	8.43	304.2				
	11870.8	3297.5	7.46	284.6				
	13005.3	3612.6	5.68	240.9				
	13282	3689.5	5.13	228.9				

900QZ-50G

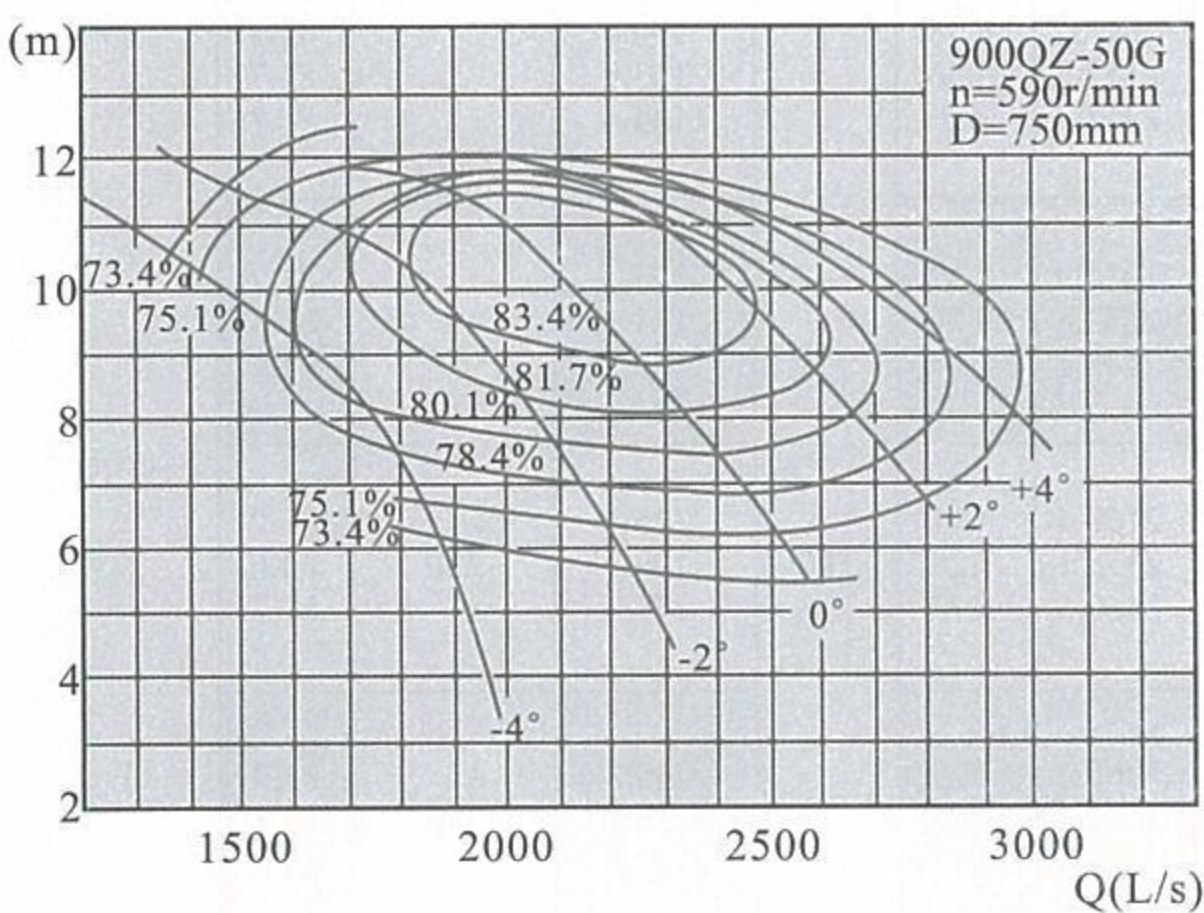

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	5576.9	1549.1	9.64	590	186.9	200	78.4	750
	5722	1589.4	9.62		185.8			
	6498.6	1805.2	7.43		167.8			
-2°	5941.9	1650.5	11.06		228.4	250	78.4	
	6706.2	1862.8	9.93		217			
	7720.3	2144.5	7.01		187.9			
0°	6571.8	1825.5	11.66		266.3	315	78.4	
	7461.5	2072.6	10.45		250.3			
	8832.5	2453.5	6.86		210.5			
+2°	7645.5	2123.7	11.69		310.6	355	78.4	
	8583	2384.2	10.35		285.9			
	9823.5	2728.8	7.44		253.9			
	8469	2352.5	11.54		339.5		78.4	


900QZ-50D

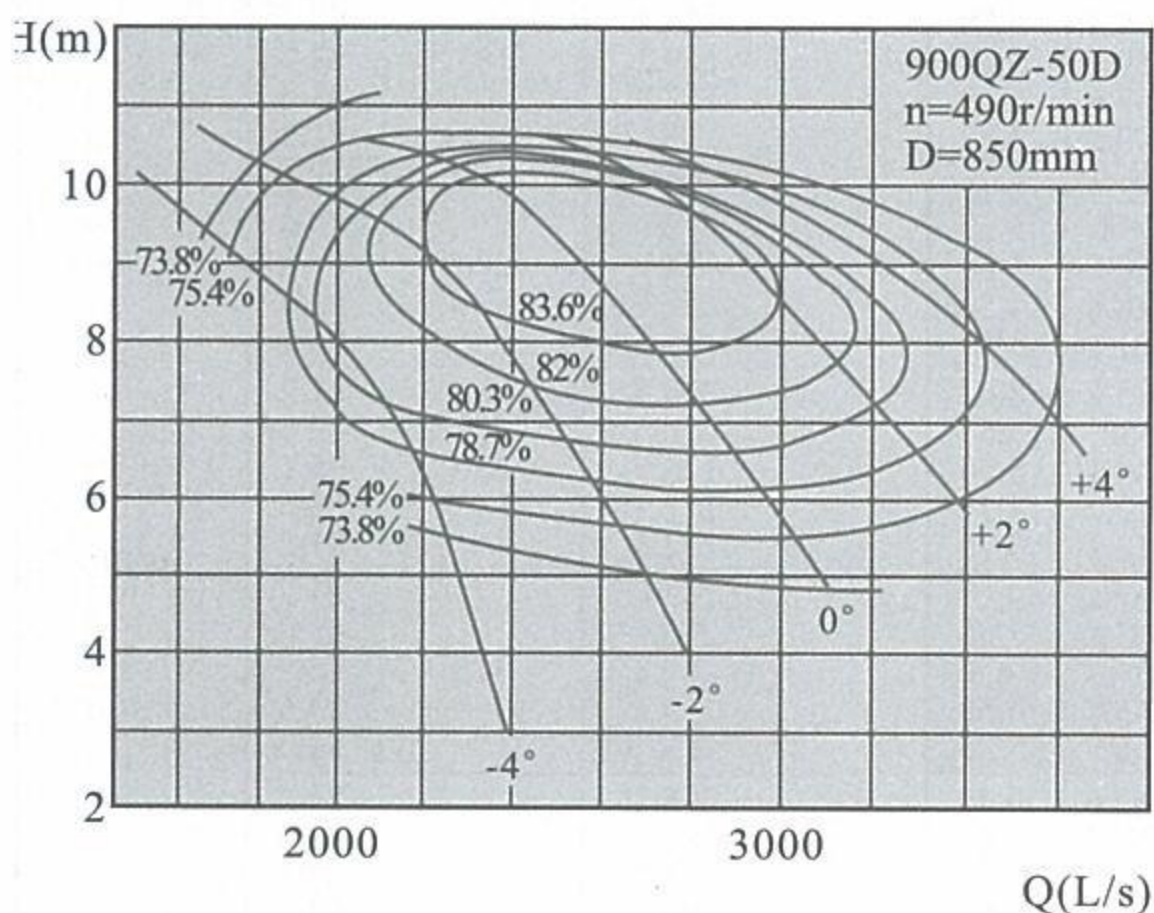

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	6742.3	1872.9	8.54	490	199.5	220	78.7	850
	6917.7	1921.6	8.53		198.4		81	
	7856.6	2182.4	6.58		179.1		78.7	
-2°	7183.6	1995.5	9.8		243.7	280	78.7	
	8107.6	2252.1	8.8		231.8		83.9	
	9333.7	2592.7	6.21		200.6		78.7	
0°	7945.2	2207	10.33		284.2	315	78.7	
	9020.7	2505.8	9.26		267.5		85.1	
	10678.2	2966.2	6.08		224.7		78.7	
+2°	9243.2	2567.6	10.36		331.5	355	78.7	
	10376.6	2882.4	9.17		305.5		84.8	
	11876.4	3299	6.59		271		78.7	
+4°	10238.8	2844.1	10.22	362.4	400	78.7		
	11400.4	3166.8	8.97	342.5		81.3		
	12344	3428.9	8.01	342.4		78.7		




900QZ-75G

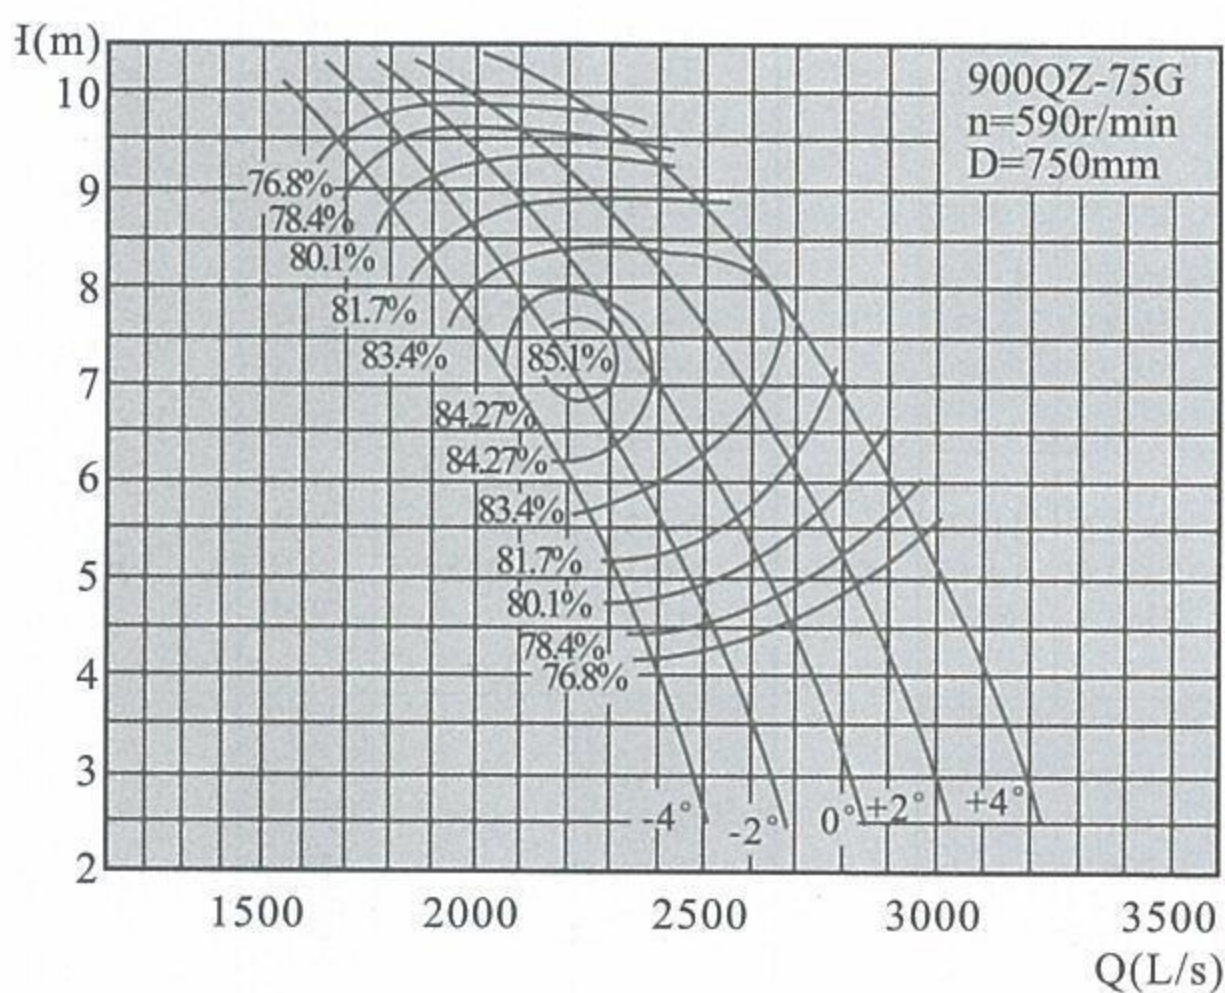

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	6814.7	1893	8.38	590	190.4	220	81.7	750
	7768.2	2157.8	6.56		163.9		84.7	
	8322.1	2311.7	5.2		144.4		81.7	
-2°	7044.7	1956.9	8.69		204.1	250	81.7	
	8109.2	2252.6	7.02		181.7		85.3	
	8814.4	2448.4	5.38		158.1		81.7	
0°	7579.3	2105.4	8.91		225.1	280	81.7	
	8489.1	2358.1	7.28		199.3		84.6	
	9250.2	2569.5	5.72		176.4		81.7	
+2°	8154.7	2265.2	8.99		244.4	315	81.7	
	9084.2	2523.4	7.44		219.1		84.1	
	9772.5	2714.6	6.37		207.6		81.7	
+4°	9008.2	2502.3	8.98	269.7	315	81.7		
	9505.4	2640.4	7.89	244.8		83.4		
	10013	2781.4	7.09	236.6		81.7		


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

900QZ-75D

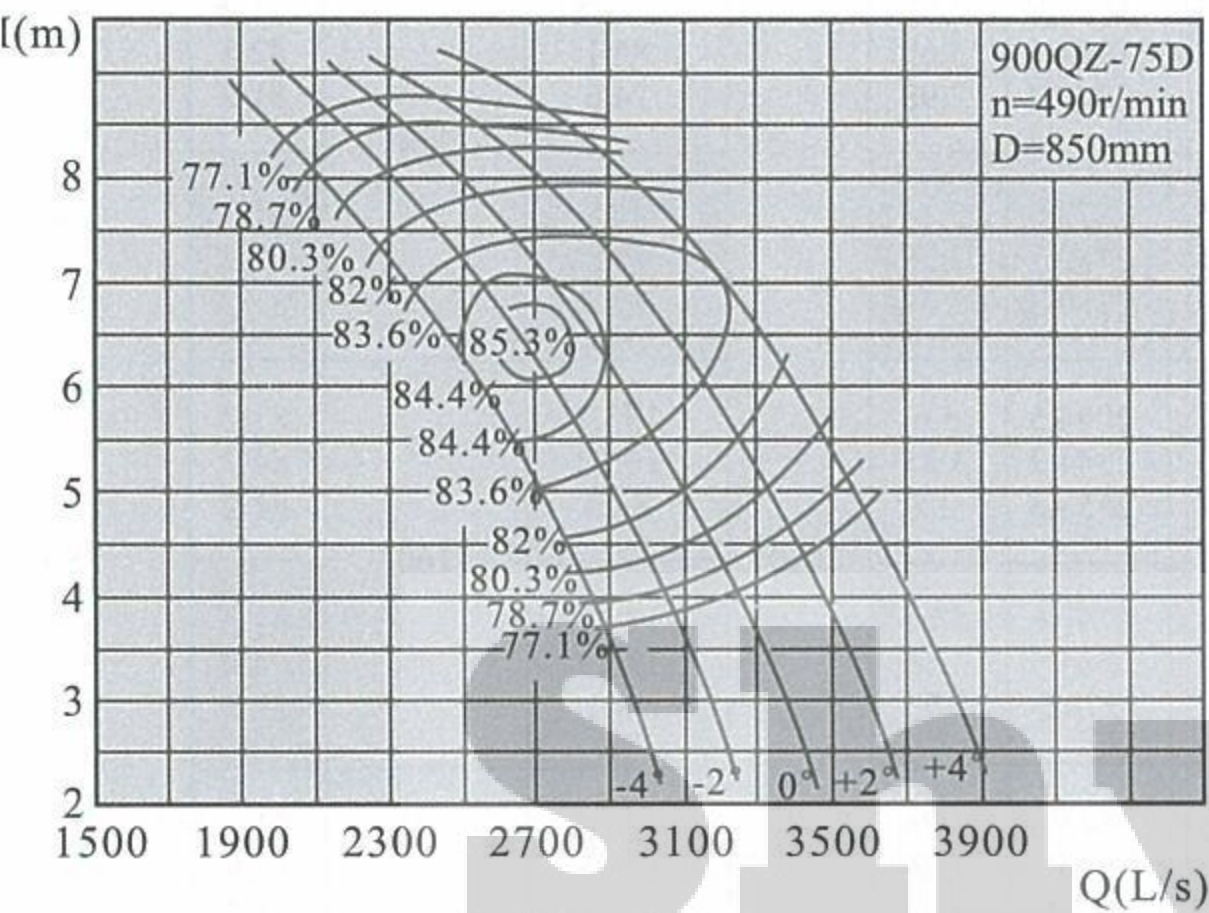


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	8238.7	2288.5	7.43	490	203.4	220	82	850
	9391.5	2608.8	5.81		175.2		84.9	
	10061.1	2794.8	4.61		154.2		82	
-2°	8516.8	2365.8	7.7		218	250	82	
	9803.8	2723.3	6.22		194.2		85.5	
	10656.3	2960.1	4.77		168.9		82	
0°	9163.2	2545.3	7.89		240.4	280	82	
	10263.1	2850.9	6.45		213		84.8	
	11183.2	3106.4	5.07		188.5		82	
+2°	9858.9	2738.6	7.97		261.1	280	82	
	10982.6	3050.7	6.59		234.1		84.3	
	11814.7	3281.8	5.65		221.8		82	
+4°	10890.7	3025.2	7.96	288.1	315	82		
	11491.7	3192.1	6.99	261.5		83.7		
	12105.5	3362.6	6.28	252.7		82		

900QZ-100G

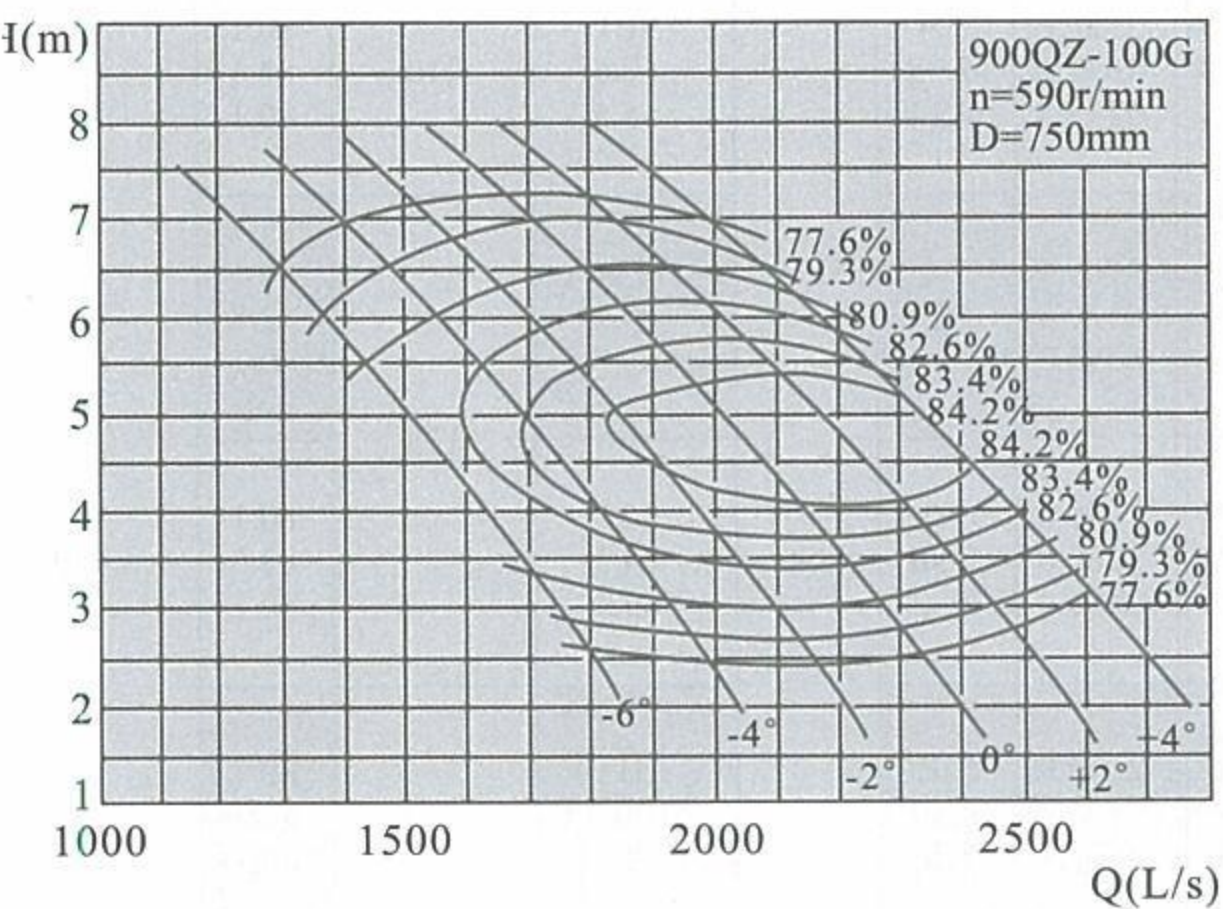


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	5252.6	1459	5.44	590	96.3	110	80.9	750
	5722	1589.4	4.17		78.7		82.6	
	6166	1712.8	3.36		69.8		80.9	
-4°	5576.2	1548.9	6.03		113.3	132	80.9	
	6408.6	1780.2	4.24		88.7		83.5	
	6998.4	1944	3.01		71		80.9	
-2°	5968.7	1658	6.32		127.1	160	80.9	
	6980.8	1939.1	4.35		98.4		84	
	7618	2116.1	3.04		78		80.9	
0°	6394.9	1776.4	6.47		139.3	160	80.9	
	7553	2098.1	4.36		106.4		84.2	
	8165	2268.1	3.08		84.8		80.9	
+2°	6982.2	1939.5	6.5	152.8	185	80.9		
	8010.8	2225.2	4.58	118.2		84.7		
	8647.3	2402	3.33	97		80.9		
	7631.8	2119.9	6.27	161.2		80.9		

900QZ-100D

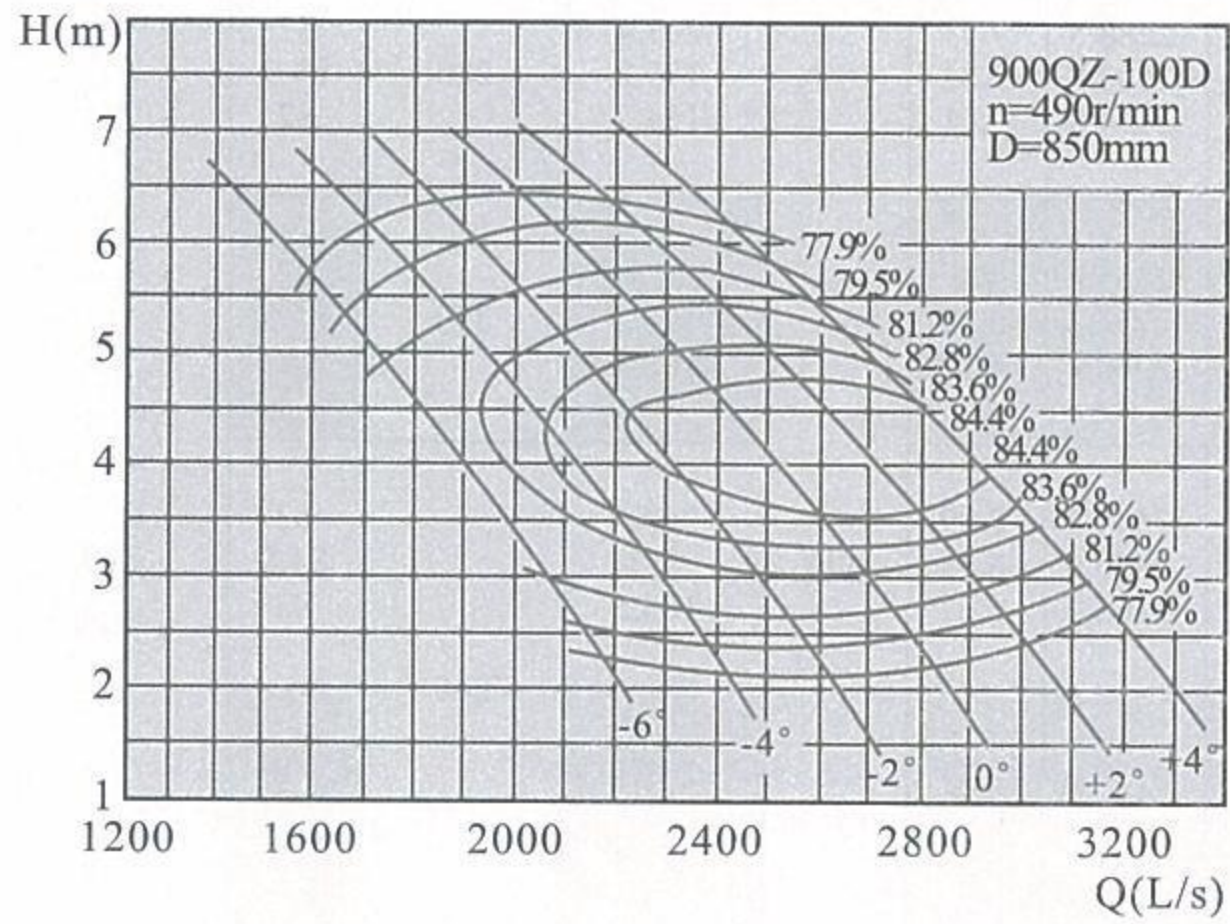

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-6°	6350.2	1763.9	4.82	490	102.8	132	81.2	850	
	6917.7	1921.6	3.69		84.1		82.8		
	7454.5	2070.7	2.98		74.6		81.2		
-4°	6741.5	1872.6	5.34		121	160	81.2		850
	7747.9	2152.2	3.76		94.8		83.7		
	8460.9	2350.3	2.67		75.8		81.2		
-2°	7216	2004.5	5.6		135.7	185	81.2		850
	8439.6	2344.3	3.85		105.2		84.2		
	9210	2558.3	2.7		83.3		81.2		
0°	7731.3	2147.6	5.73		148.7	132	81.2		850
	9131.4	2536.5	3.86		113.7		84.4		
	9871.3	2742	2.73		90.5		81.2		
+2°	8441.3	2344.8	5.76	163.2	185	81.2	850		
	9684.8	2690.2	4.06	126.3		84.8			
	10454.3	2904	2.95	103.6		81.2			
+4°	9226.6	2562.9	5.56	172.1	132	81.2	850		
	10376.6	2882.4	4.08	136.3		84.6			
	11008	3057.8	3.23	119.3		81.2			


900QZ-135G

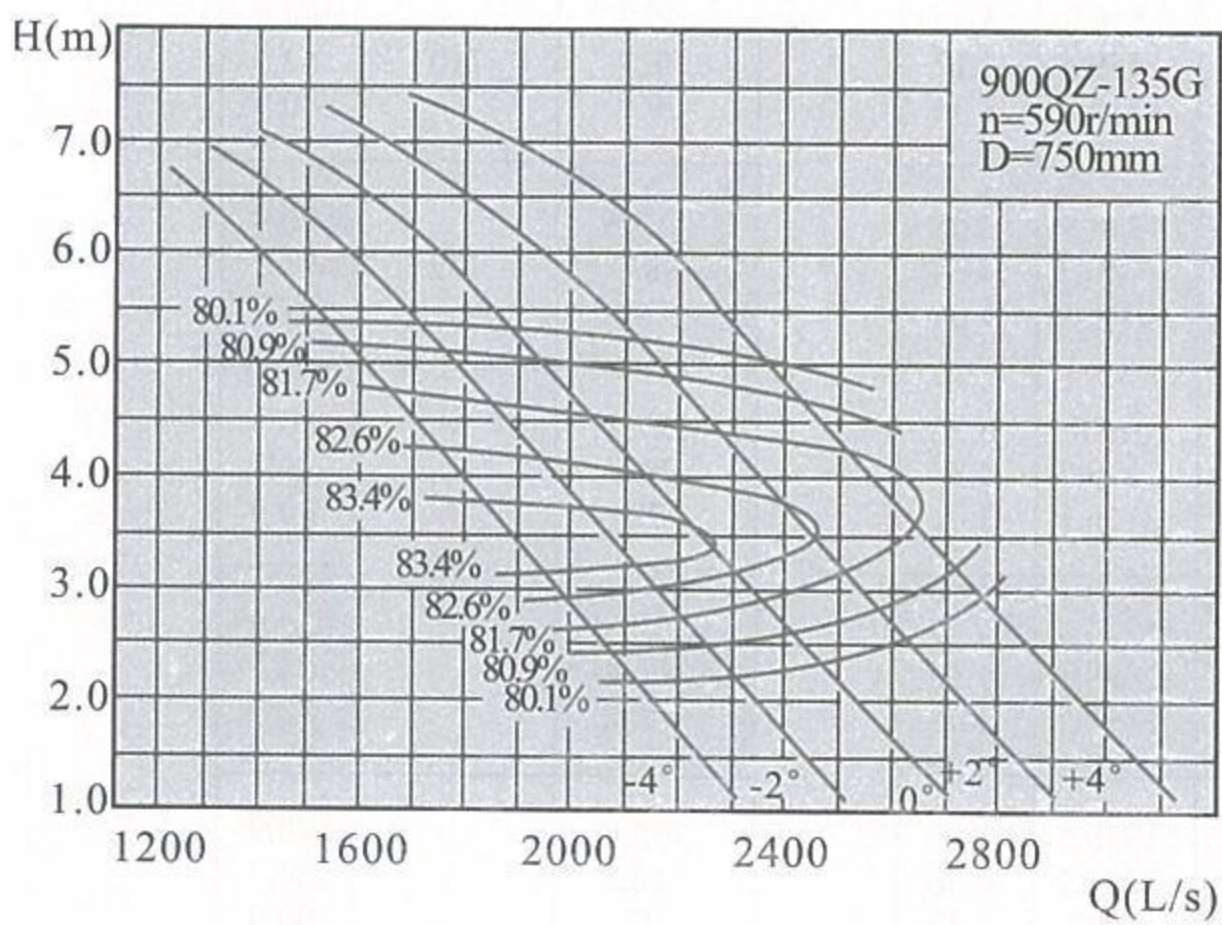

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	5495.6	1526.6	5.4	590	101	110	80.1	750	
	7099.8	1972.2	2.98		68.6		84.1		
	7609.5	2113.8	2.14		55.5		80.1		
-2°	6130.3	1702.9	5.35		111.6	132	80.1		750
	7633.1	2120.3	3.19		79.1		83.8		
	8266.2	2296.2	2.27		63.7		80.1		
0°	6768.9	1880.2	5.3		122	160	80.1		750
	8138.9	2260.8	3.36		89.3		83.5		
	8839.3	2455.4	2.32		69.7		80.1		
+2°	7703.6	2139.9	5.01		131.3	132	80.1		750
	8768.4	2435.7	3.49		100.6		82.8		
	9440.6	2622.4	2.56		82.1		80.1		
+4°	8483.9	2356.6	5.04	145.5	160	80.1	750		
	9386.3	2607.3	3.67	114.4		82.2			
	9940.9	2761.4	2.95	99.8		80.1			


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

900QZ-135D

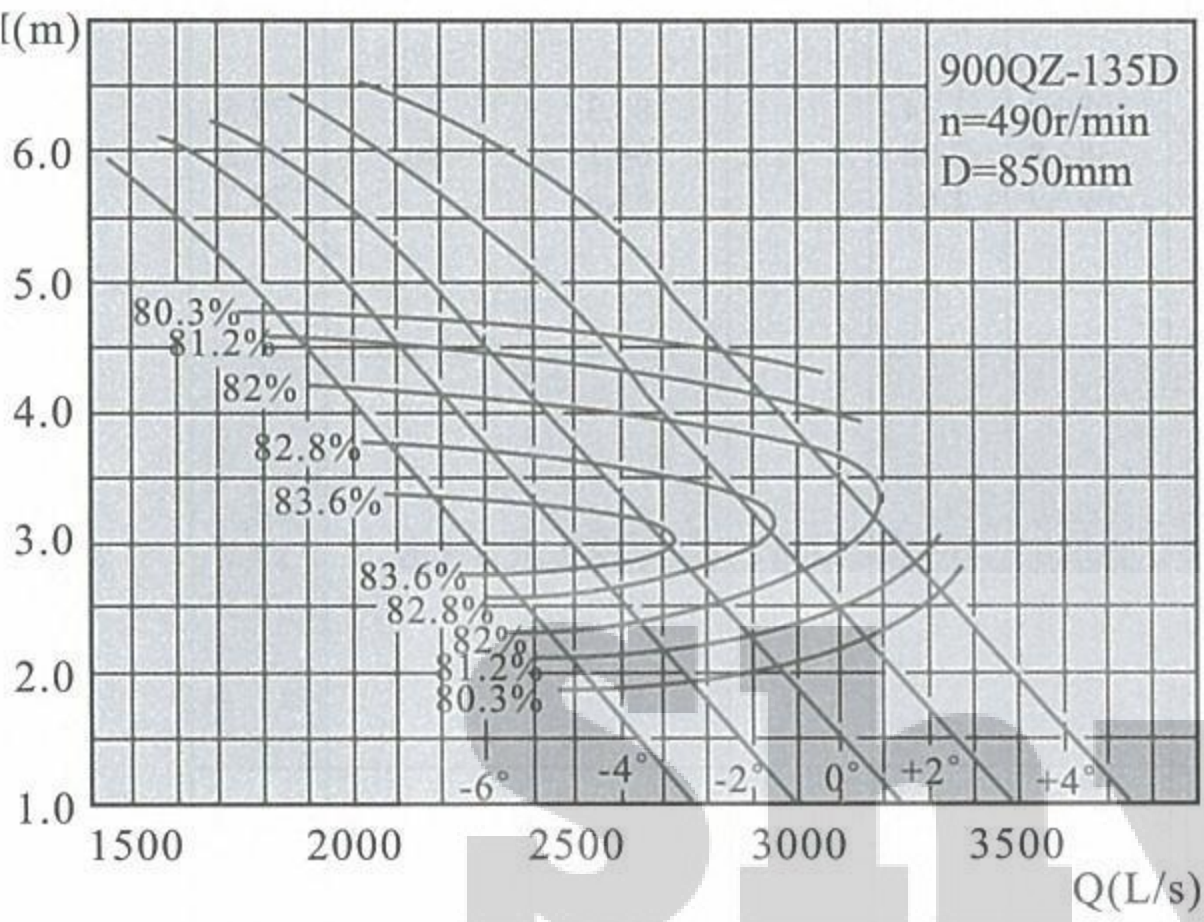


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	6644.1	1845.6	4.79	490	107.8	132	80.3	850
	8583.5	2384.3	2.64		73.3			
	9199.8	2555.5	1.9		59.2			
-2°	7411.4	2058.7	4.74		119.1	160	80.3	
	9228.3	2563.4	2.82		84.5		84	
	9993.6	2776	2.01		68.1		80.3	
0°	8183.4	2273.2	4.69		130.3	160	80.3	
	9839.8	2733.3	2.98		95.5		83.7	
	10686.5	2968.5	2.05		74.4		80.3	
+2°	9313.5	2587.1	4.44		140.2	185	80.3	
	10600.7	2944.6	3.09		107.5		83	
	11413.4	3170.4	2.26		87.7		80.3	
+4°	10256.8	2849.1	4.46	155.3	185	80.3		
	11347.8	3152.2	3.25	122.2		82.4		
	12018.3	3338.4	2.61	106.5		80.3		

900QZ-160G

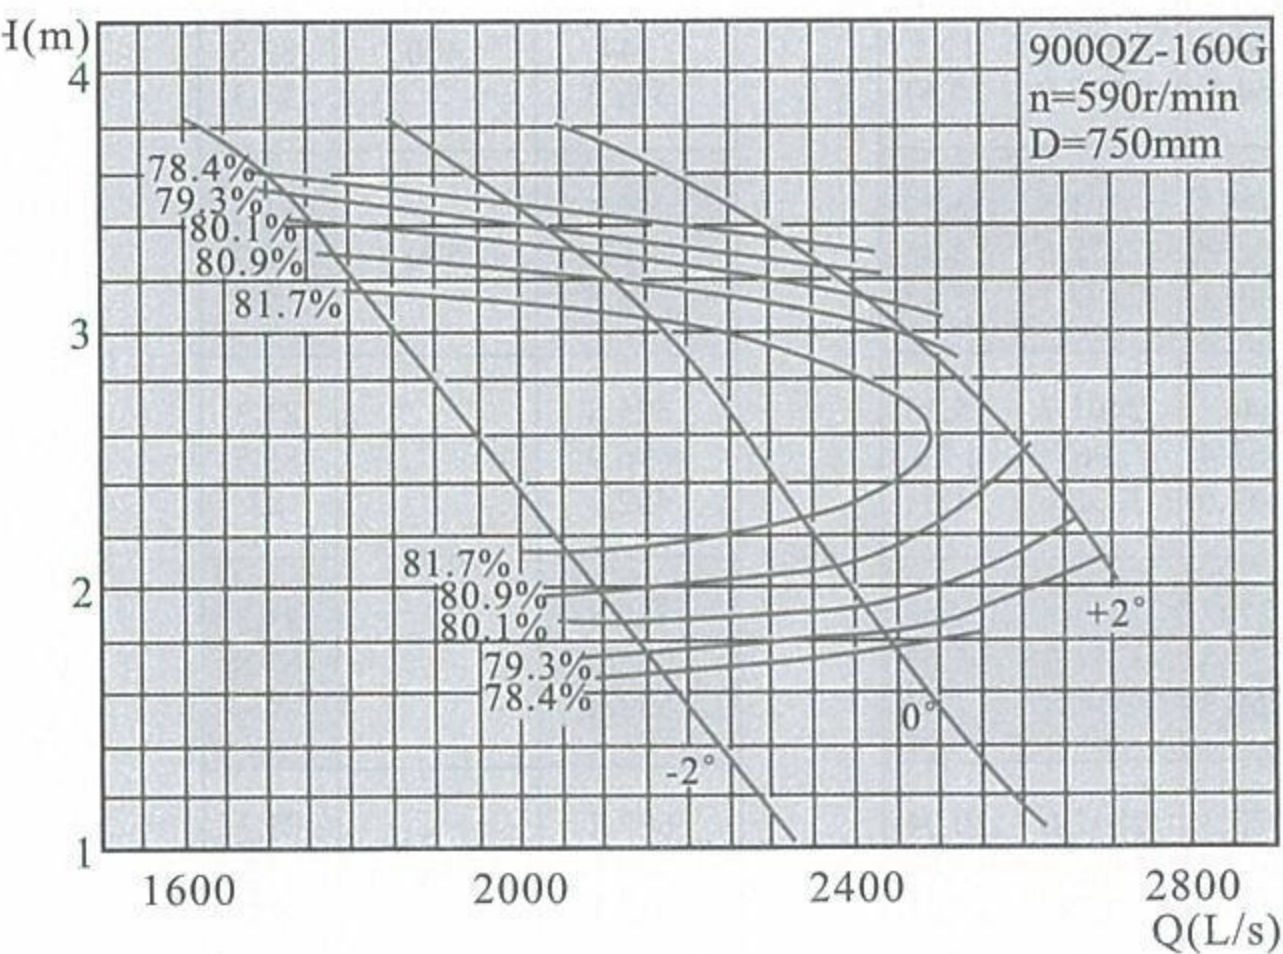


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	6213.6	1726	3.65	590	78	90	79.3	750
	7095.3	1970.9	2.58		60		83	
	7750.8	2153	1.82		48.5		79.2	
0°	7339.7	2038.8	3.5		88.3	110	79.3	
	8239.7	2288.8	2.59		70.7		82.2	
	8759.9	2433.3	1.88		56.7		79.3	
+2°	8524.2	2367.8	3.34		98	110	79.3	
	9200.9	2555.8	2.79		86.6		80.9	
	9707	2696.4	2.17		72.5		79.3	

900QZ-160D

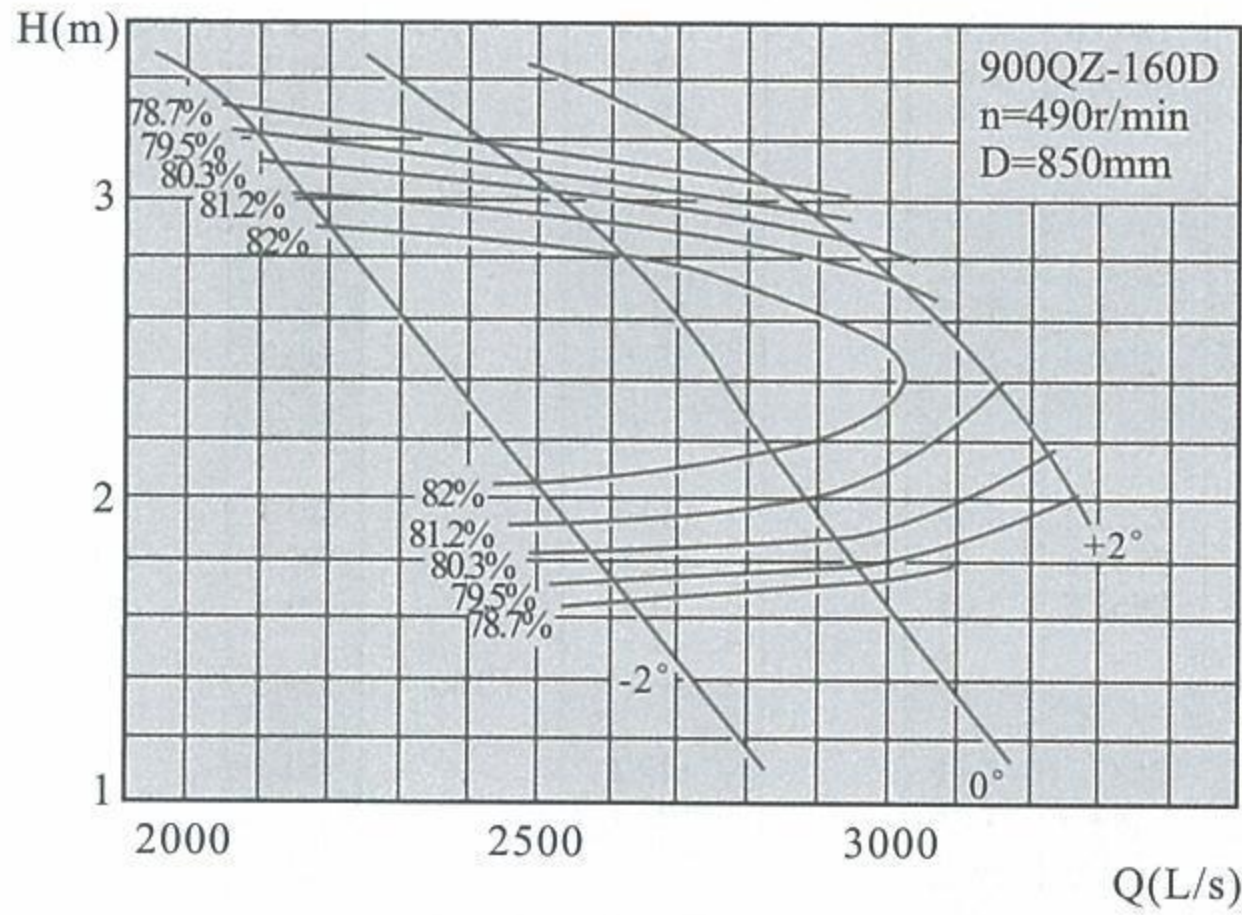

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-2°	7512.1	2086.7	3.24	490	83.3	90	79.5	850	
	8578	2382.8	2.28		64.1		83.2		
	9370.5	2602.9	1.61		51.8		79.5		
0°	8873.5	2464.9	3.1		94.2	110	79.5		850
	9961.5	2767.1	2.29		75.5		82.4		
	10590.5	2941.8	1.67		60.5		79.5		
+2°	10305.5	2862.6	2.96		104.6	132	79.5		850
	11123.7	3089.9	2.48		92.4		81.2		
	11735.5	3259.9	1.93		77.4		79.5		


1000QZ-35

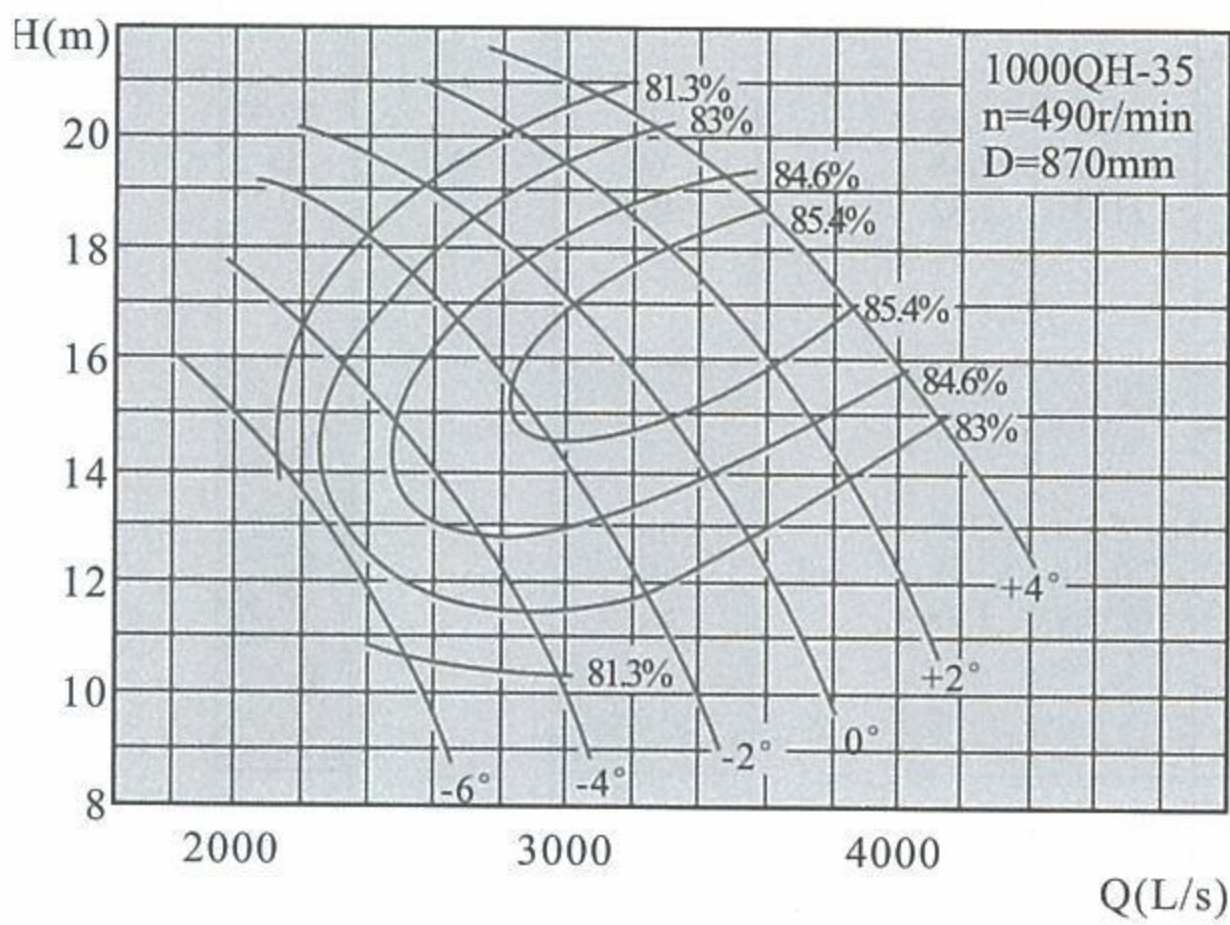

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-6°	7660.9	2128	14.07	490	361.1	400	81.3	870	
	8604.4	2390.1	12.1		344		82.5		
	9064.3	2517.9	10.61		322.3		81.3		
-4°	7925	2201.4	16.52		438.6	500	81.3		870
	9642.9	2678.6	13.45		417		84.7		
	10349.1	2874.7	11.43		388.5		83		
-2°	8646	2401.7	18.15		525.8	630	81.3		870
	10681.4	2967	14.6		496.9		85.5		
	11651.6	3236.6	11.81		452.1		83		
0°	9221.6	2561.6	19.02		587.5	800	81.3		870
	11571.5	3214.3	15.67		576.1		85.8		
	12758.3	3544	12.73		533.3		83		
+2°	10233.3	2842.6	20.04		687.2	800	81.3		870
	12461.6	3461.6	17.03		670.1		86.3		
	13888.8	3858	13.81		630.1		83		
+4°	11129.4	3091.5	20.66		770.3	900	81.3		870
	13351.7	3708.8	17.77		753.7		85.8		
	14867.9	4130	14.86		725.6		83		


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1000QH-40

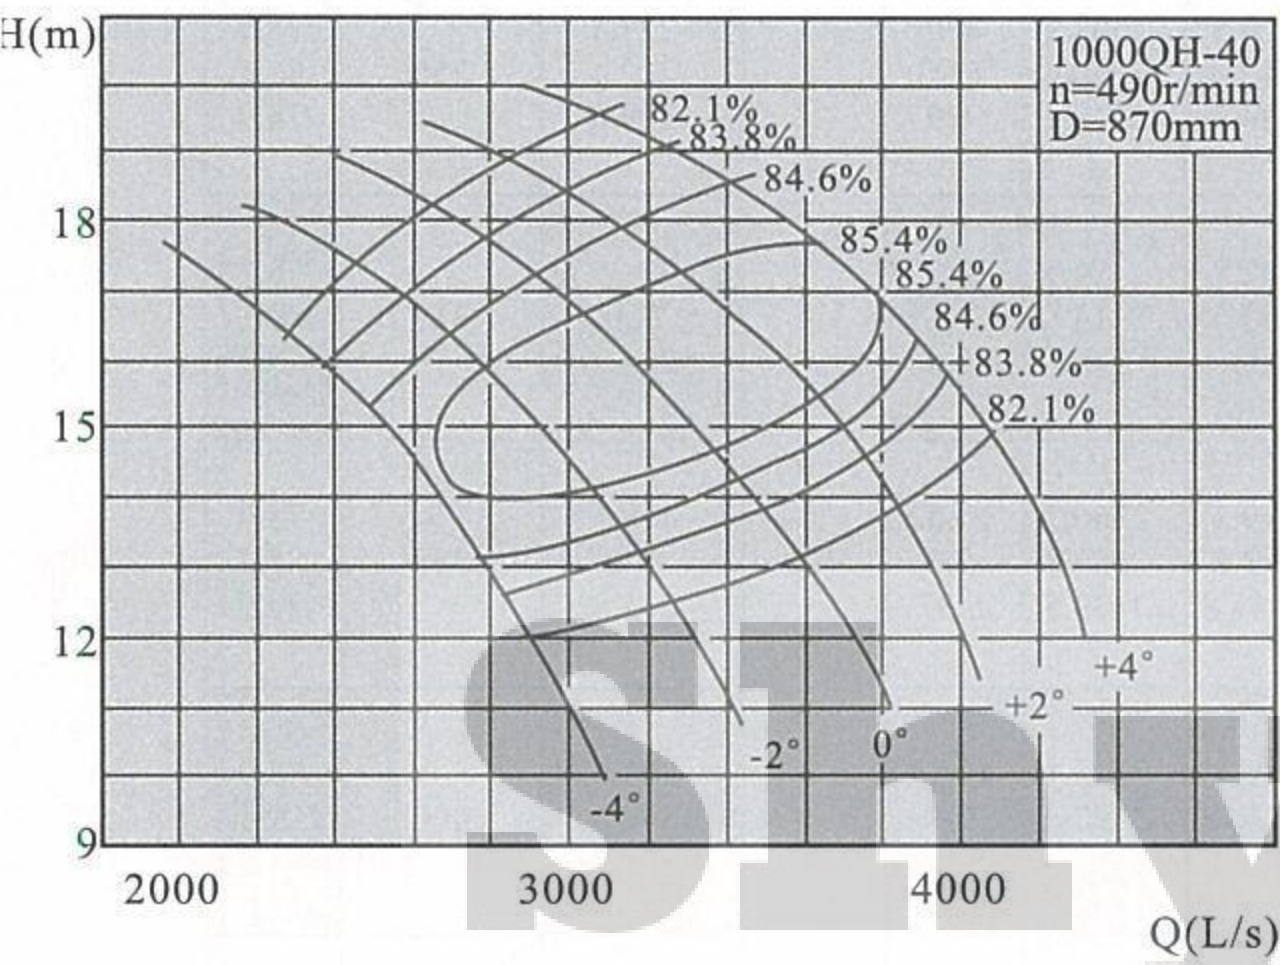


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	8287	2301.9	16.37	490	450.1	500	82.1	870
	9642.9	2678.6	13.11		404.9			
	10515.2	2920.9	11.95		416.7			
-2°	8900	2472.2	17.36		512.6	560	82.1	
	10681.4	2967	14.21		484.5			
	11788.1	3274.5	12.49		488.6			
0°	9631.3	2675.4	18.29		584.2	630	82.1	
	11571.5	3214.3	15.46		569.3			
	12961.3	3600.3	13.14		564.9			
+2°	10244.9	2845.8	18.94		643.6	710	82.1	
	12461.6	3461.6	16.52		650.7			
	13873.6	3853.8	13.85		637.4			
+4°	11144.8	3095.8	19.58	724	800	82.1		
	13351.7	3708.8	17.48	741.2				
	14715.4	4087.6	14.97	730.9				

1000QH-72

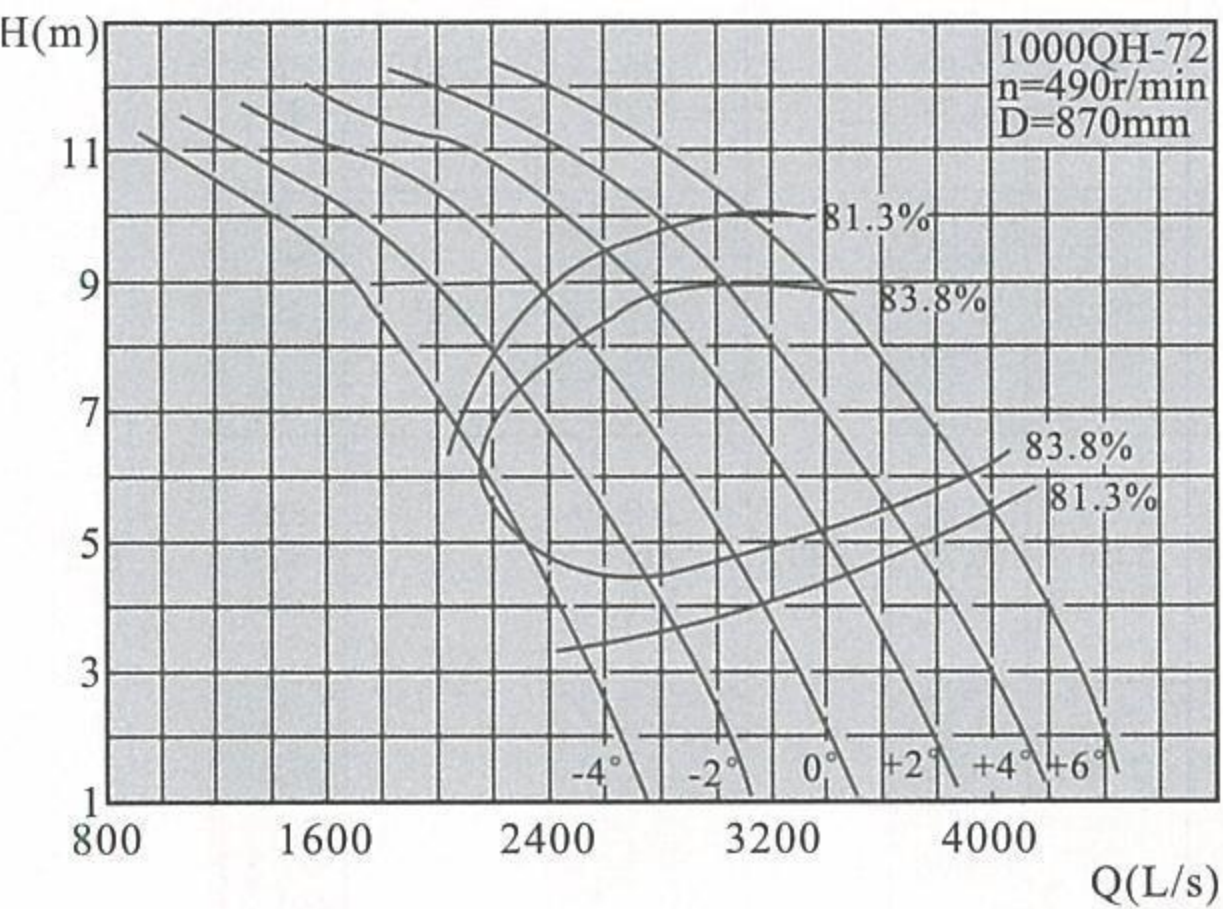


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	转速n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	6735.2	1870.9	7.97	490	179.9	200	81.3	870
	7714.3	2142.9	6.05		151.8			
	7951.7	2208.8	5.61		144.9			
	7981.4	2217	5.52		143.4			
	8841.8	2456.1	3.75		111			
-2°	7387.9	2052.2	8.64		213.9	250	81.3	
	8040.7	2233.5	7.64		199.7			
	8871.5	2464.3	6.09		173.3			
	9761.6	2711.6	4.42		140.3			
	10117.6	2810.5	3.55		120.5			
0°	8396.7	2332.4	9.03		254	280	81.3	
	9079.2	2522	8.01		236.6			
	10206.6	2835.2	6.03		196.8			
	10859.4	3016.5	4.8		169.6			
	11245.1	3123.6	3.94		148.3			
+2°	9138.5	2538.5	9.61	294.3	315	81.3		
	9672.6	2686.8	8.93	281				
	10948.4	3041.2	6.91	240.9				
	12135.2	3370.9	4.8	189.6				
	12610	3502.8	4.03	170.4				
+4°	9969.3	2769.2	9.94	332	400	81.3		
	10681.4	2967	9.09	315.7				
	11986.9	3329.7	7.09	271.6				
	13055	3626.4	5.28	224.3				
	13648.4	3791.2	4.32	197.6				
+6°	10978.1	3049.5	10.08	370.9	400	81.3		
	11868.2	3296.7	8.84	341.1				


1000QZ-50

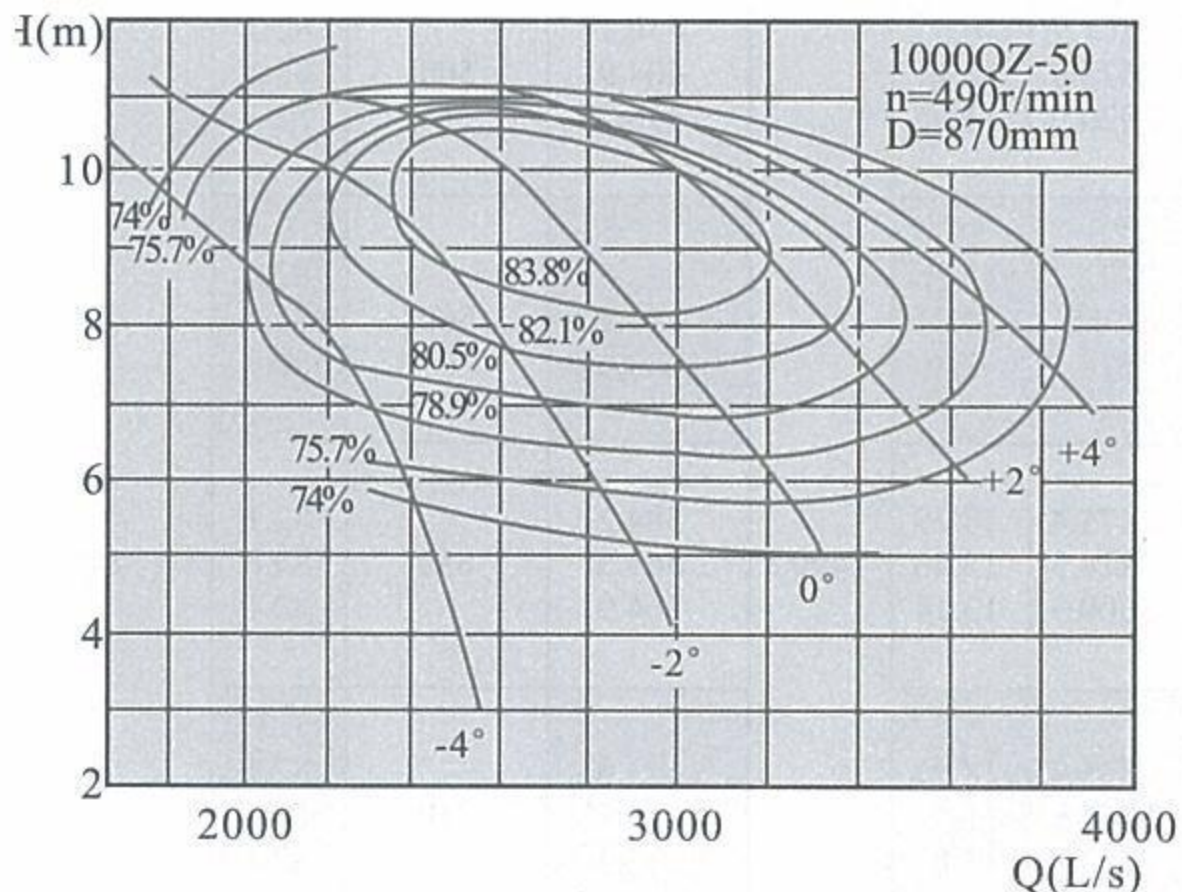

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	转速 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	7229.5	2008.2	8.95	490	223.5	250	78.9	870
	7417.6	2060.4	8.93		222.4		81.2	
	8424.3	2340.1	6.9		200.6		78.9	
-2°	7702.8	2139.7	10.27		273.1	315	78.9	
	8693.5	2414.8	9.22		260		84	
	10008.1	2780	6.5		224.7		78.9	
0°	8519.3	2366.5	10.82		318.5	355	78.9	
	9672.6	2686.8	9.7		300		85.2	
	11449.8	3180.5	6.37		251.8		78.9	
+2°	9911.1	2753.1	10.85		371.5	400	78.9	
	11126.4	3090.7	9.6		342.6		85	
	12734.6	3537.4	6.91		303.7		78.9	
+4°	10978.7	3049.6	10.71	406	450	78.9		
	12224.2	3395.6	9.39	383.9		81.5		
	13236	3676.7	8.39	383.7		78.9		

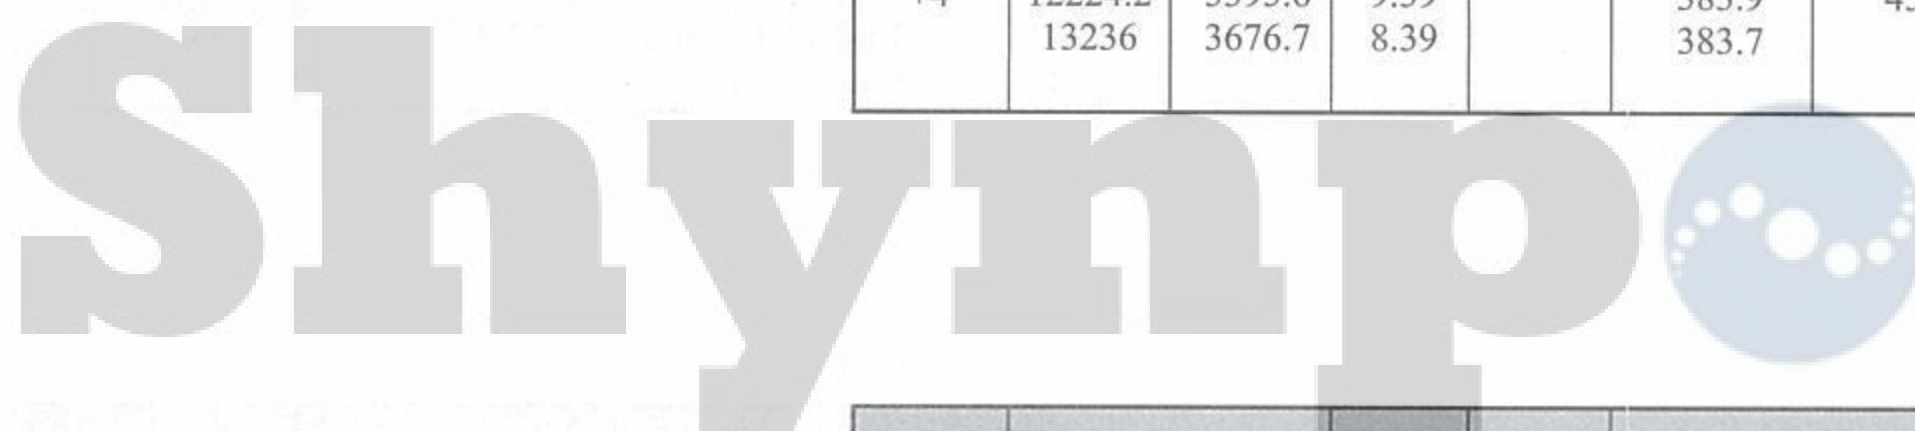


1000QZ-75

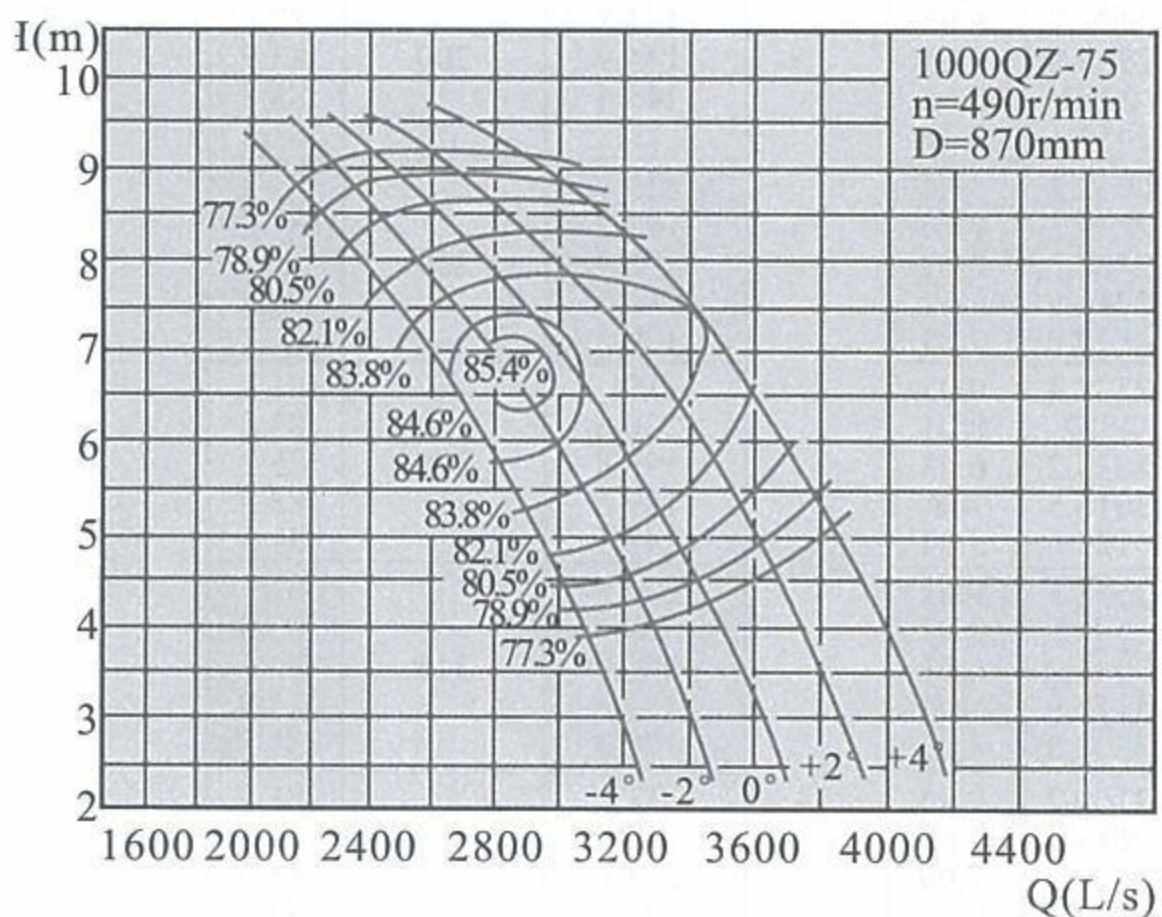

叶片安装角度 Angle	流量 Q Capacity		扬程 H Head (m)	转速 n Speed (r/min)	功率 Power(kw)		效率 η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	8834.1	2453.9	7.78	490	228	250	82.1	870
	10070.2	2797.3	6.09		196.4		85.1	
	10788.2	2996.7	4.83		172.9		82.1	
-2°	9132.3	2536.7	8.07		244.4	280	82.1	
	10512.3	2920.1	6.51		217.8		85.6	
	11426.4	3174	4.99		189.3		82.1	
0°	9825.4	2729.3	8.27		269.5	315	82.1	
	11004.8	3056.9	6.76		238.8		84.9	
	11991.3	3330.9	5.31		211.3		82.1	
+2°	10571.3	2936.5	8.35		292.7	355	82.1	
	11776.2	3271.2	6.91		262.5		84.4	
	12668.4	3519	5.92		248.6		82.1	
+4°	11677.7	3243.8	8.34	322.9	355	82.1		
	12322.1	3422.8	7.32	293.2		83.8		
	12980.2	3605.6	6.58	283.3		82.1		


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1000QZ-100

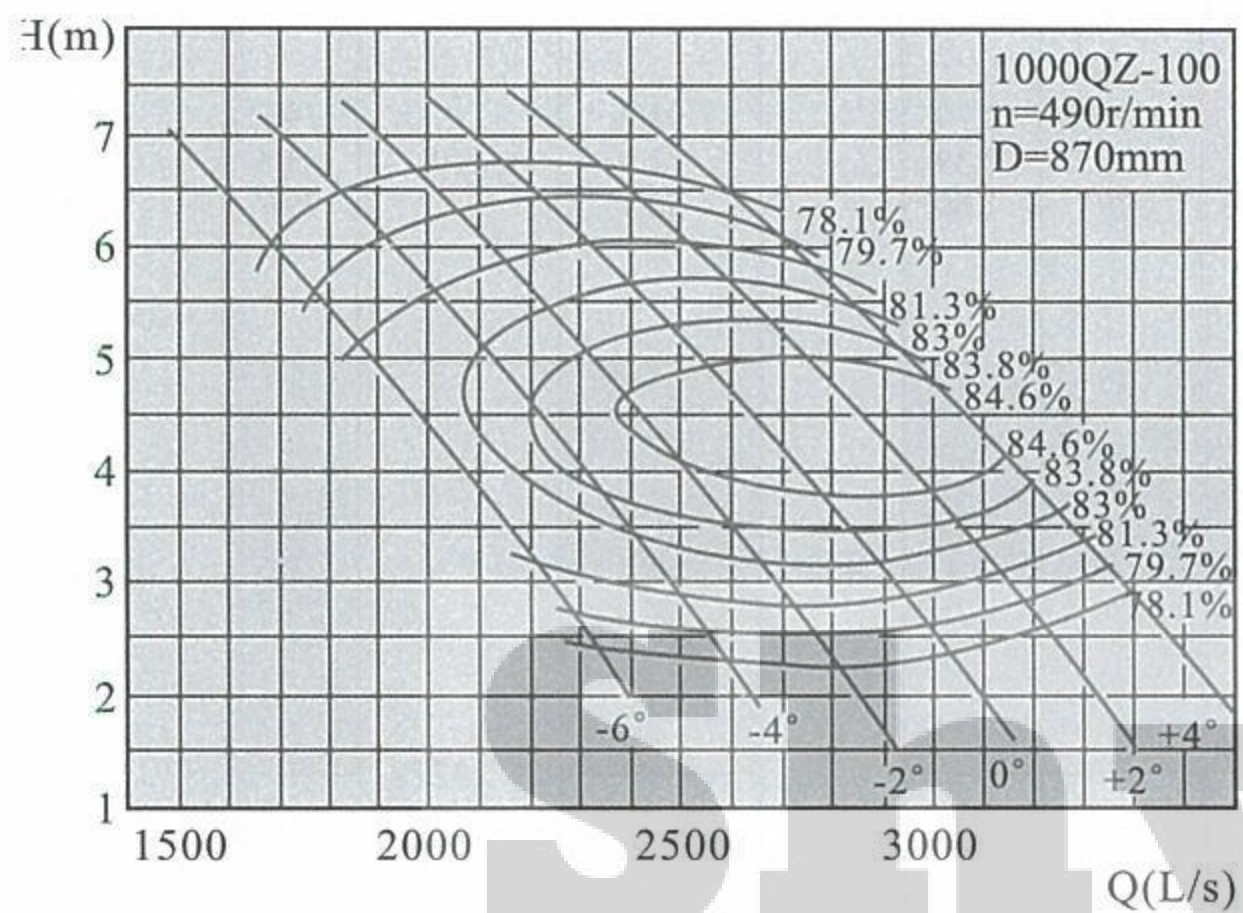


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-6°	6809.1	1891.4	5.05	490	115.2	132	81.3	870	
	7417.6	2060.4	3.87		94.3		83		
	7993.2	2220.3	3.12		83.6		81.3		
-4°	7228.6	2007.9	5.6		135.6	160	81.3		
	8307.7	2307.7	3.94		106.3		83.9		
	9072.3	2520.1	2.79		84.9		81.3		
-2°	7737.5	2149.3	5.87		152.1	185	81.3		
	9049.5	2513.7	4.03		117.9		84.3		
	9875.5	2743.2	2.82		93.4		81.3		
0°	8289.9	2302.8	6		166.7		185		81.3
	9791.3	2719.8	4.04		127.5				84.6
	10584.6	2940.2	2.86		101.5				81.3
+2°	9051.3	2514.2	6.03	182.9	200	81.3			
	10384.7	2884.6	4.25	141.7		85			
	11209.8	3113.8	3.09	116.1		81.3			
+4°	9893.3	2748.1	5.82	192.9	220	81.3			
	11126.4	3090.7	4.27	152.9		84.7			
	11803.5	3278.8	3.38	133.7		81.3			

1000QZ-135

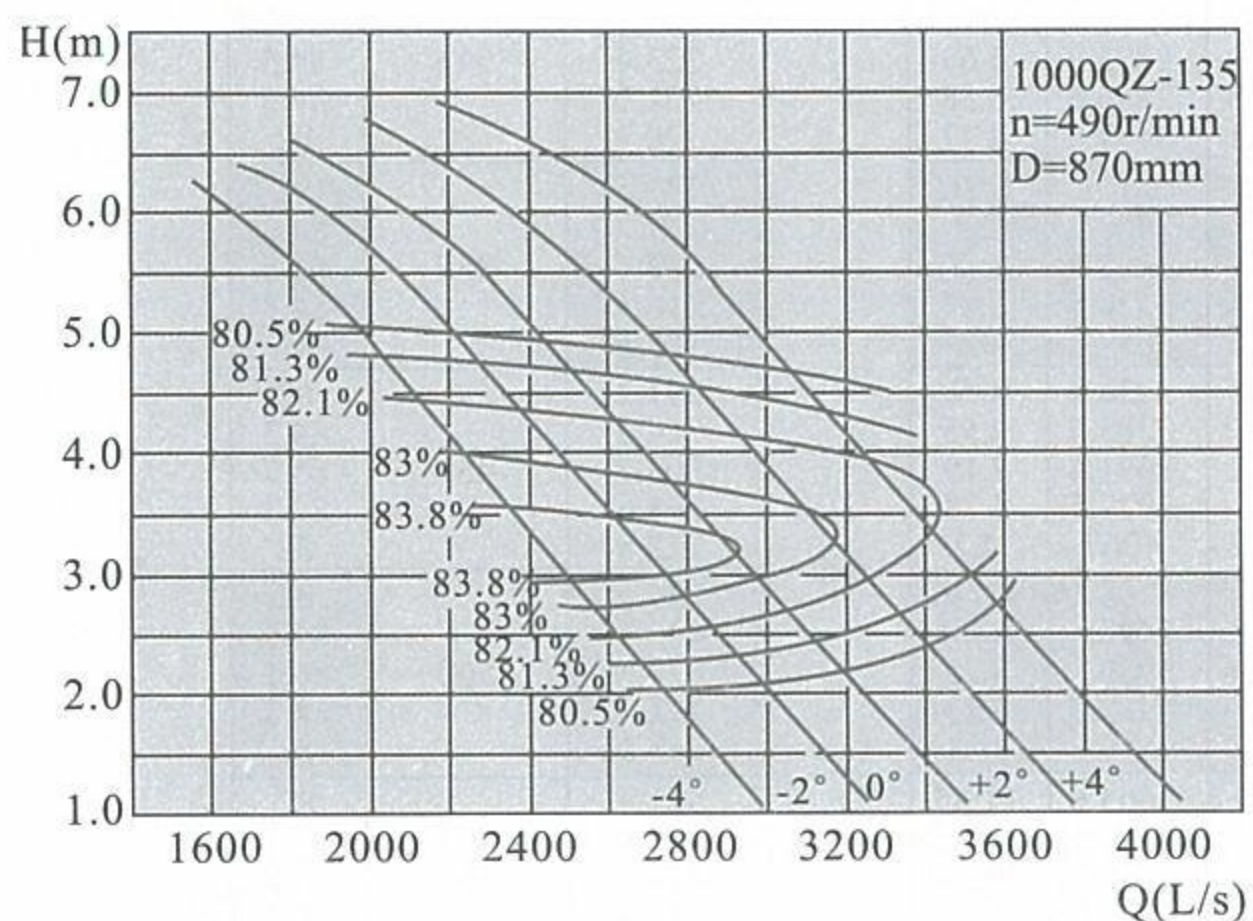


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	7124.2	1978.9	5.01	490	120.9	132	80.5	870
	9203.8	2556.6	2.77		82.2		84.4	
	9864.5	2740.2	1.99		66.4		80.5	
-2°	7946.9	2207.5	4.97		133.5	160	80.5	
	9895.1	2748.6	2.96		94.8		84.2	
	10715.8	2976.6	2.1		76.3		80.5	
0°	8774.7	2437.4	4.92		146	185	80.5	
	10550.8	2930.8	3.12		107		83.8	
	11458.7	3183	2.15		83.4		80.5	
+2°	9986.5	2774	4.65		157.1	185	80.5	
	11366.8	3157.4	3.24		120.5		83.2	
	12238.2	3399.5	2.37		98.2		80.5	
+4°	10998	3055	4.68	174.1	220	80.5		
	12177.6	3338.8	3.41	137		83.7		
	12998.5	3580.9	2.41	100.5		80.5		

1000QZ-160

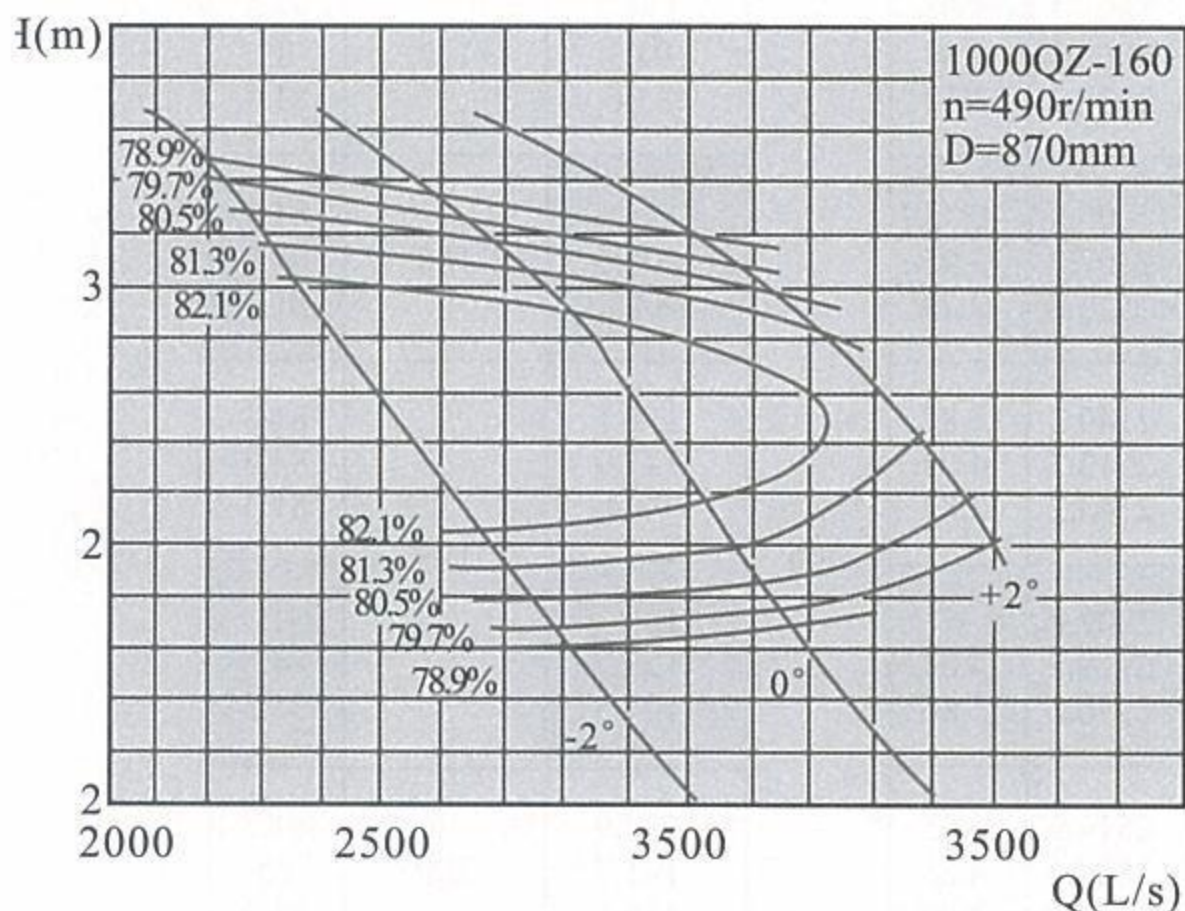

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-2°	8054.9	2237.5	3.39	490	93.4	110	79.7	870	
	9197.8	2555	2.39		71.9		83.4		
	10047.6	2791	1.69		58.1		79.7		
0°	9514.7	2643	3.25		105.6	132	79.7		870
	10681.4	2967	2.4		84.7		82.6		
	11355.8	3154.4	1.75		67.9		79.7		
+2°	11050.2	3069.5	3.1		117.2	132	79.7		870
	11927.5	3313.2	2.59		103.6		81.3		
	12583.5	3495.4	2.02		86.8		79.7		


1200QH-72

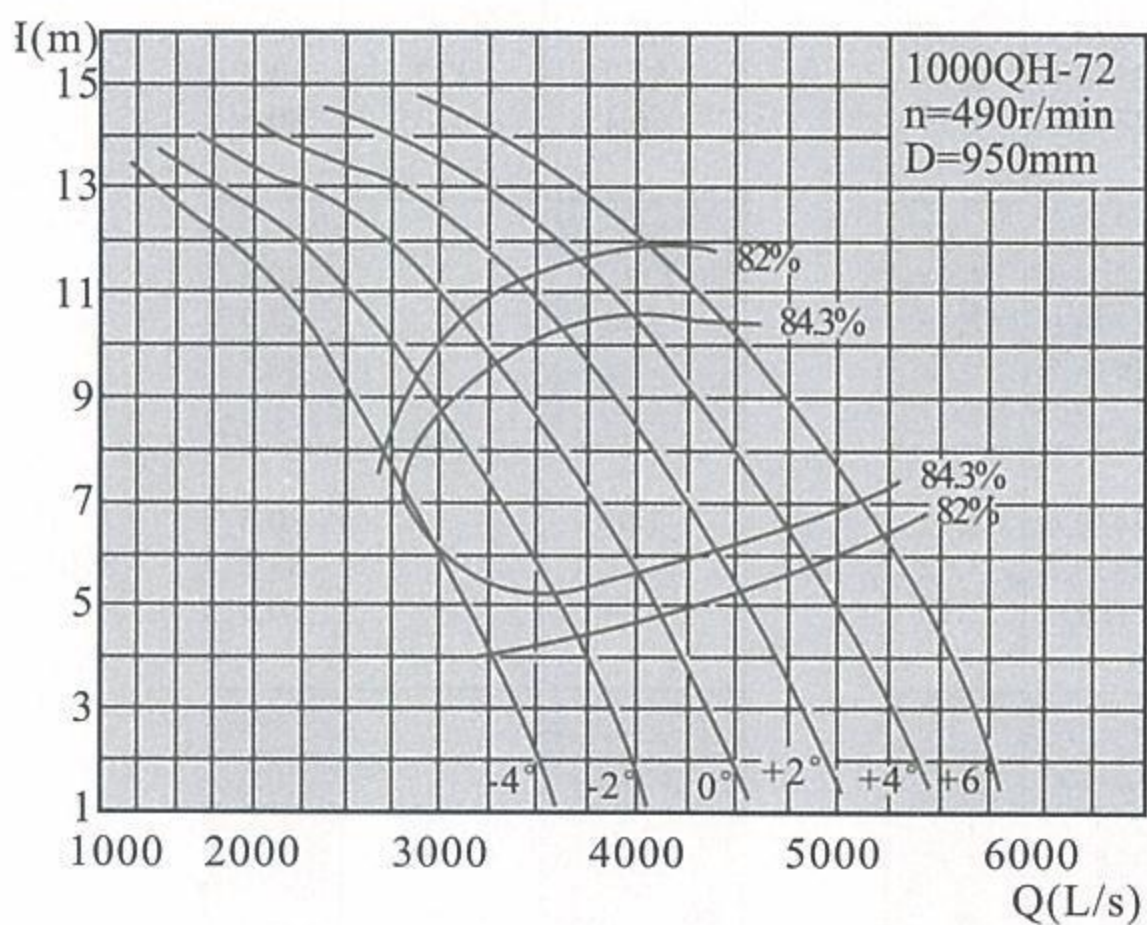

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	8769.3	2435.9	9.5	490	277	315	82	950	
	10044.1	2790	7.21		234.1		84.3		
	10353.1	2875.9	6.69		223.4		84.5		
	10391.8	2886.6	6.58		221.1		84.3		
	11512.1	3197.8	4.47		170.9		82		
-2°	9619.2	2672	10.31		329.5	355	82		950
	10469	2908.1	9.1		308		84.3		
	11550.7	3208.5	7.26		267.4		85.5		
	12709.6	3530.5	5.27		216.3		84.3		
	13173.2	3659.2	4.24		185.5		82		
0°	10932.6	3036.8	10.76		391.2	450	82		950
	11821.1	3283.6	9.55		364.8		84.3		
	13289.1	3691.4	7.19		303.7		85.7		
	14139	3927.5	5.73		261.6		84.3		
	14641.2	4067	4.7		228.5		82		
+2°	11898.4	3305.1	11.46	453.4	500	82	950		
	12593.8	3498.3	10.65	433.4		84.3			
	14254.9	3959.7	8.25	371.8		86.1			
	15800.1	4388.9	5.73	292.3		84.3			
	16418.2	4560.5	4.81	262.5		82			
+4°	12980.1	3605.6	11.85	511.4	560	82	950		
	13907.2	3863.1	10.83	486.8		84.3			
	15607	4335.3	8.45	419.1		85.8			
	16997.37	4721.6	6.3	345.9		84.3			
	17770.3	4936.2	5.15	304.4		82			
+6°	14293.5	3970.4	12.02	571.3	630	82	950		
	15452.5	4292.4	10.54	526		84.3			
	16572.8	4603.5	9.32	492.5		85.5			
	18156.6	5043.5	7.1	416.5		84.3			
	18543	5150.8	6.41	395.3		82			


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

200QZ-50

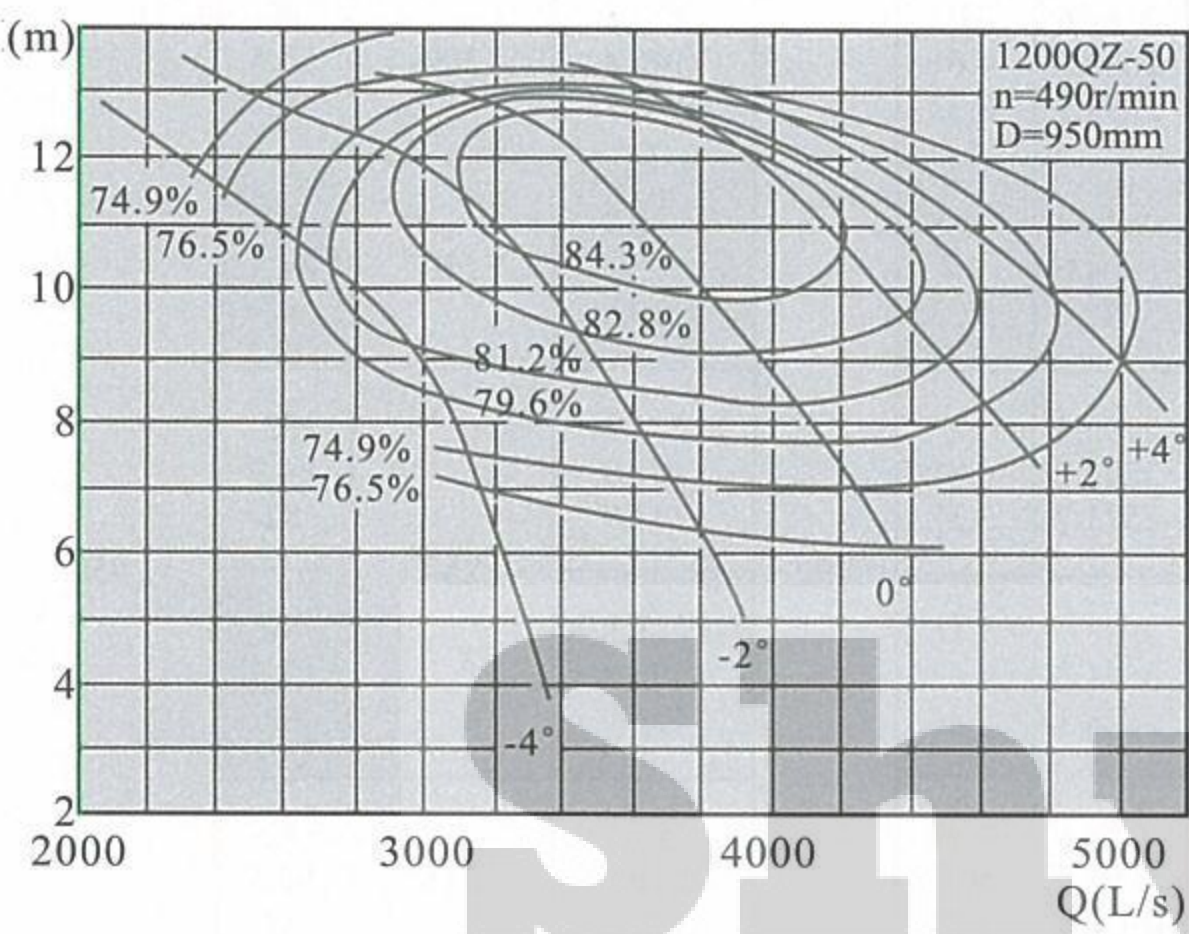


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)			
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power					
-4°	9412.9	2614.7	10.67	490	343.8	400	79.6	950			
	9657.8	2682.7	10.65		342.5		81.8				
	10968.5	3046.8	8.22		308.6		79.6				
-2°	10029	2785.8	12.24		420.1	450	79.6		950		
	11318.9	3144.1	10.99		401		84.6				
	13030.7	3619.6	7.75		345.7		79.6				
0°	11092.2	3081.2	12.91		489.9	560	79.6			950	
	12593.8	3498.3	11.57		462.9		85.7				
	14907.8	4141	7.59		387.3		79.6				
+2°	12904.3	3584.5	12.94		571.4	630	79.6				950
	14486.7	4024.1	11.45		528.7		85.5				
	16580.5	4605.7	8.23		467.2		79.6				
+4°	14294.3	3970.6	12.77	624.6	710	79.6	950				
	15916	4421.1	11.2	591.4		82.1					
	17233.4	4787	10.01	590.2		79.6					

200QZ-75

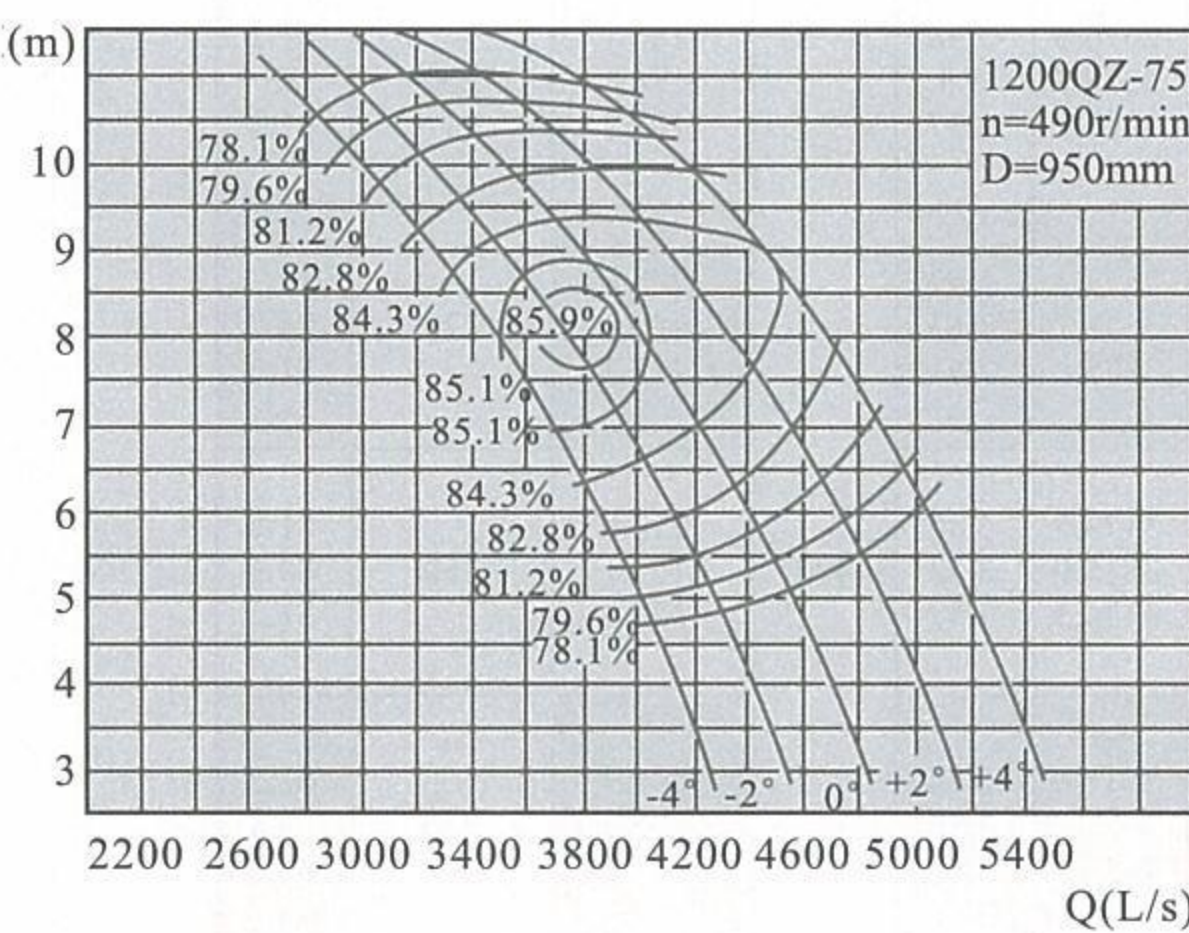


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)			
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power					
-4°	11502	3195	9.28	490	351.3	400	82.8	950			
	13111.4	3642.1	7.26		303.1		85.6				
	14046.3	3901.7	5.76		266.4		82.8				
-2°	11890.3	3302.9	9.62		376.6	450	82.8		950		
	13687	3801.9	7.76		336.2		86.1				
	14877.2	4132.6	5.95		291.7		82.8				
0°	12792.7	3553.5	9.86		415.3	500	82.8			950	
	14328.3	3980.1	8.06		368.5		85.4				
	15612.8	4336.9	6.33		325.5		82.8				
+2°	13763.9	3823.3	9.95		451	500	82.8				950
	15332.7	4259.1	8.2		405		84.9				
	16494.3	4581.8	7.05		383.1		82.8				
+4°	15204.4	4223.5	9.94	497.6	---	82.8	950				
	---	---	---	---		---					
	---	---	---	---		---					


200QZ-100

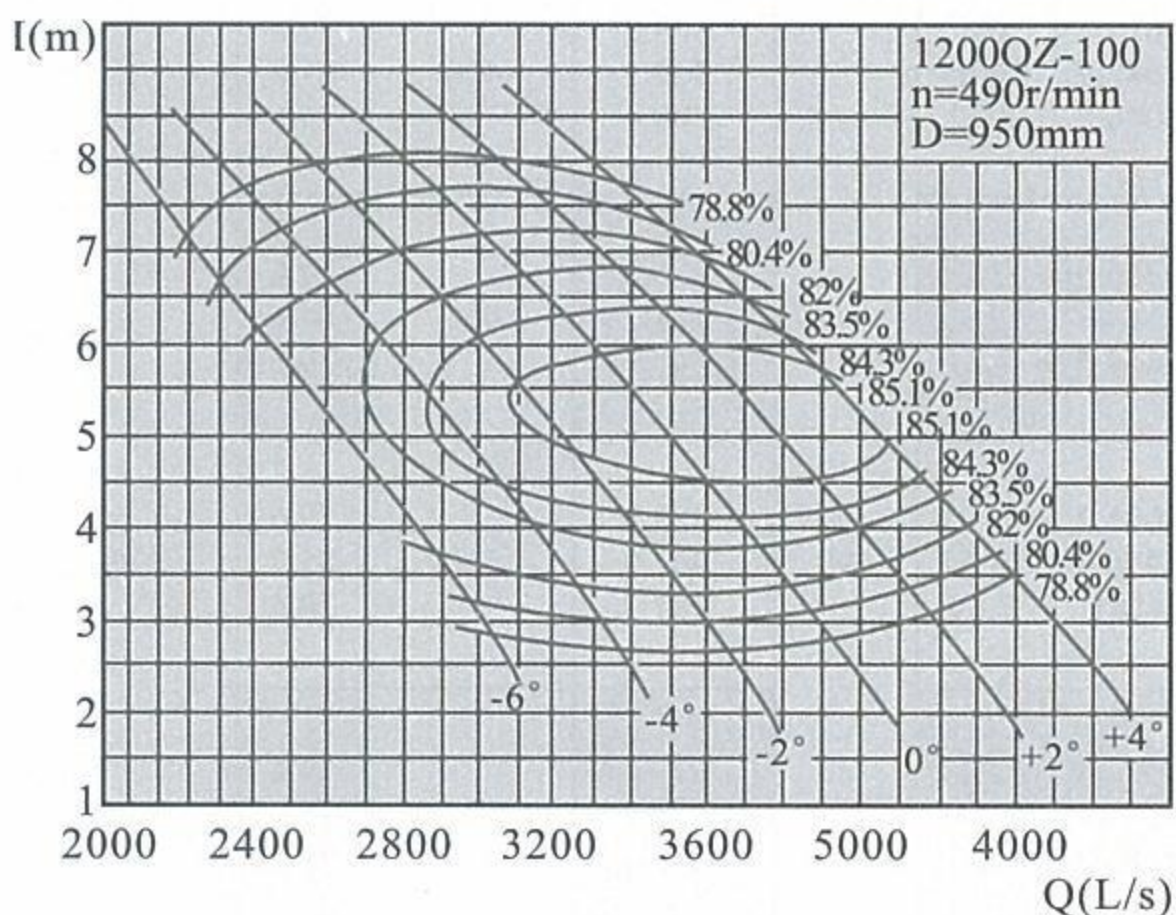

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)			
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power					
-6°	8865.5	2462.6	6.02	490	177.5	200	82	950			
	9657.8	2682.7	4.61		145.4		83.5				
	10407.2	2890.9	3.72		128.7		82				
-4°	9411.7	2614.4	6.68		208.9	250	82		950		
	10816.7	3004.6	4.7		164		84.4				
	11812.2	3281.2	3.33		130.8		82				
-2°	10074.2	2798.4	7		234.3	280	82			950	
	11782.5	3272.9	4.81		181.9		84.9				
	12858	3571.7	3.37		143.9		82				
0°	10793.5	2998.2	7.16		256.8	280	82				950
	12748.3	3541.2	4.82		196.8		85.1				
	13781.3	3828.1	3.41		156.3		82				
+2°	11784.8	3273.6	7.19	281.7	315	82	950				
	13520.9	3755.8	5.07	218.6		85.5					
	14595.2	4054.2	3.69	178.9		82					
+4°	12881.2	3578.1	6.94	297.1	355	82		950			
	14486.7	4024.1	5.1	235.9		85.3					
	15368.2	4269	4.03	205.9		82					

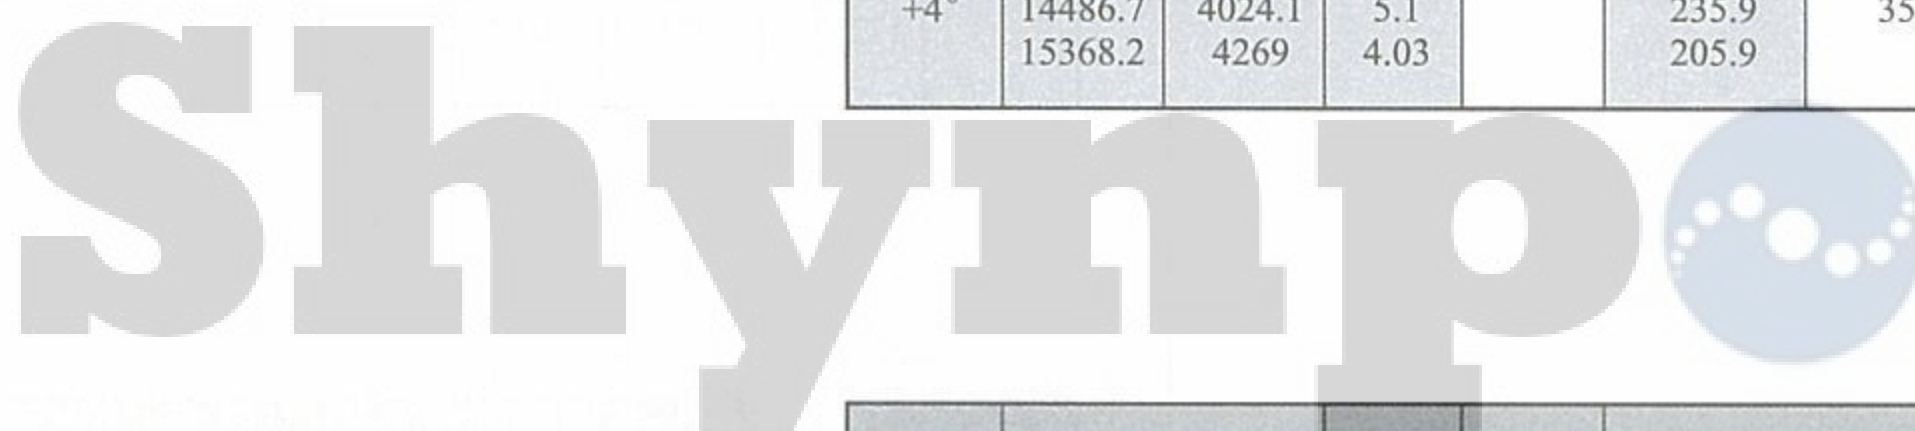


200QZ-135

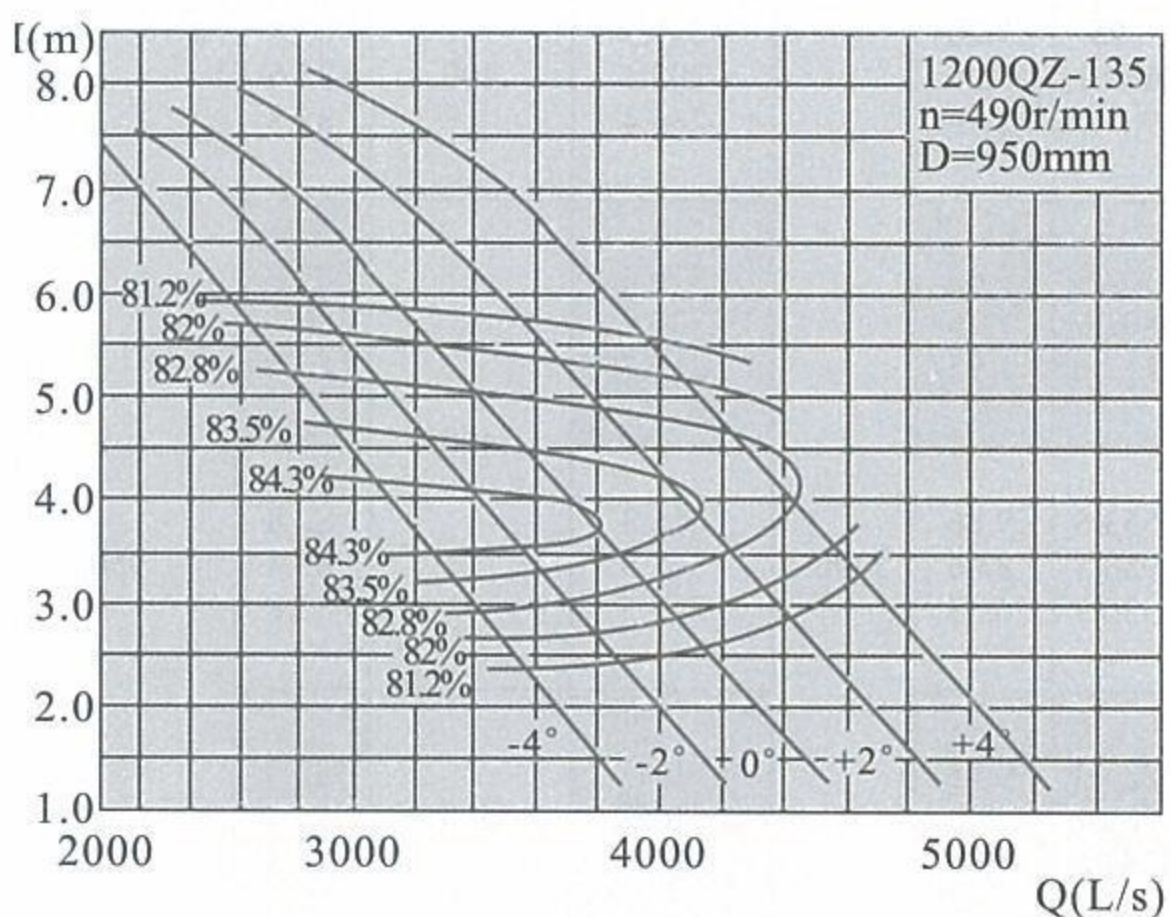

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)			
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power					
-4°	9275.7	2576.6	5.98	490	186.1	200	81.2	950			
	11983.4	3328.7	3.3		126.8		85				
	12843.7	3567.7	2.37		102.2		81.2				
-2°	10347	2874.2	5.92		205.6	220	81.2		950		
	12883.5	3578.7	3.53		146.2		84.7				
	13952	3875.6	2.51		117.4		81.2				
0°	11424.8	3173.5	5.86		224.8	250	81.2			950	
	13737.2	3815.9	3.72		165.1		84.4				
	14919.4	4144.3	2.57		128.4		81.2				
+2°	13002.5	3611.8	5.54		241.9	280	81.2				950
	14799.6	4111	3.86		185.8		83.8				
	15934.2	4426.2	2.83		151.3		81.2				
+4°	14319.4	3977.6	5.58	268	315	81.2	950				
	15842.6	4400.7	4.07	211.1		83.1					
	16778.7	4660.7	3.26	183.8		81.2					


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

200QZ-160

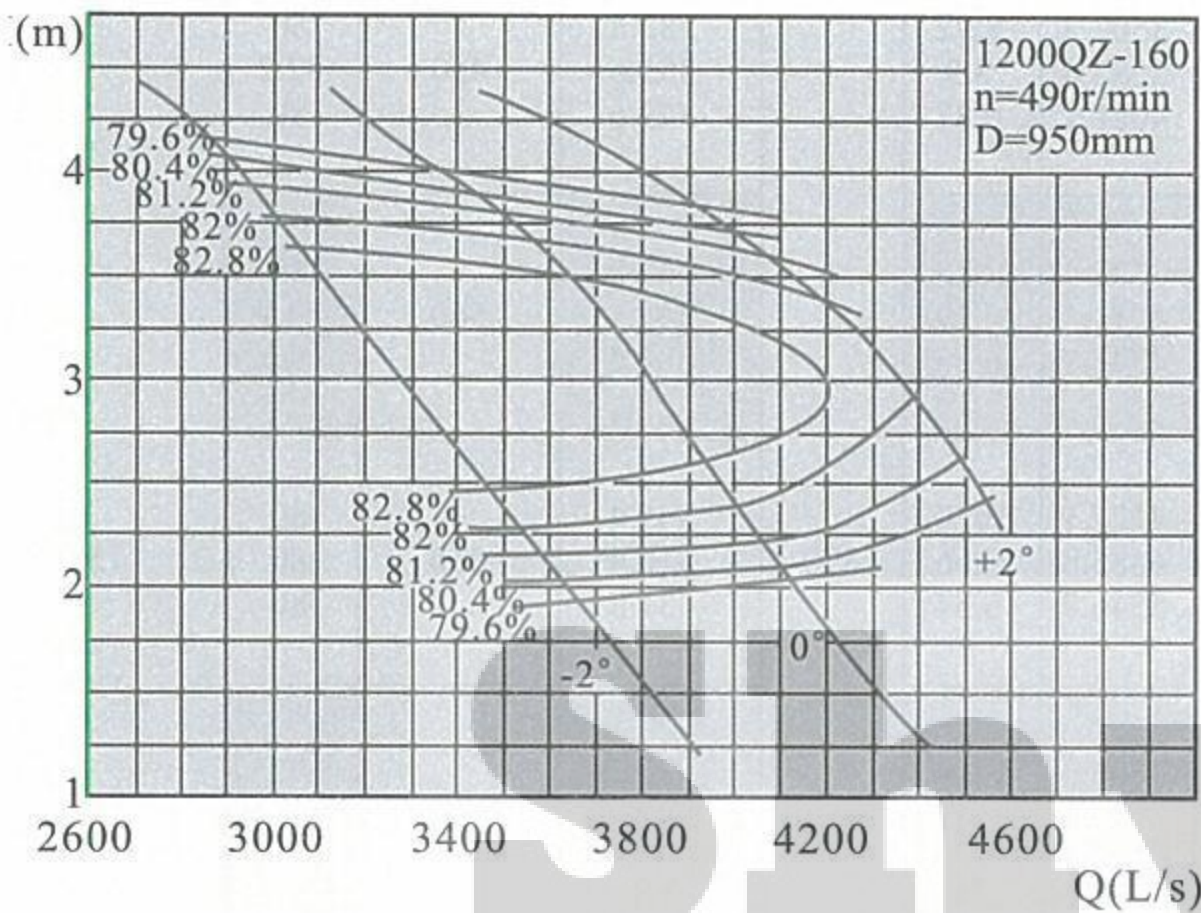


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-2°	10487.6	2913.2	4.04	490	143.7	160	80.4	950	
	11975.7	3326.6	2.85		110.9		83.9		
	13082.1	3633.9	2.02		89.3		80.4		
0°	12388.2	3441.2	3.87		162.5	185	80.4		950
	13907.2	3863.1	2.86		130.5		83.2		
	14785.3	4107	2.08		104.4		80.4		
+2°	14387.4	3996.5	3.7		180.3	200	80.4		950
	15529.7	4313.8	3.09		159.6		82		
	16383.9	4551.1	2.4		133.5		80.4		

300QH-72

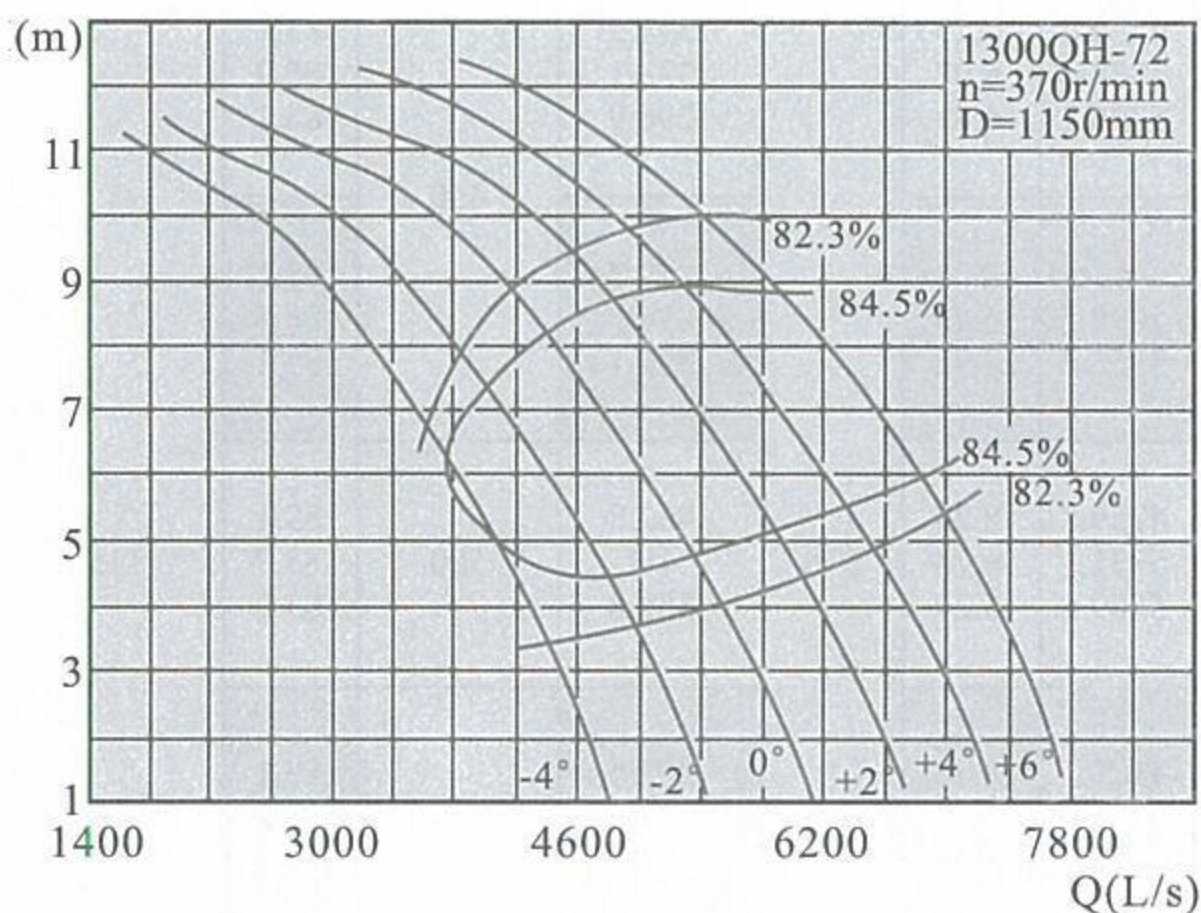


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	11746	3262.8	7.94	370	308.7	355	82.3	1150	
	13453.6	3737.1	6.03		261.1		84.6		
	13867.6	3852.1	5.59		249.1		84.8		
	13919.3	3866.5	5.5		246.5		84.6		
	15419.9	4283.3	3.73		190.4		82.3		
-2°	12884.4	3579	8.61		367.2	400	82.3		1150
	14022.8	3895.2	7.61		343.4		84.6		
	15471.7	4297.7	6.07		298.2		85.8		
	17024	4728.9	4.4		241.2		84.6		
	17644.9	4901.4	3.54		206.7		82.3		
0°	10932.6	3036.8	10.76		435.9	500	82		1150
	11821.1	3283.6	9.55		406.8		84.6		
	13289.1	3691.4	7.19		338.8		86		
	14139	3927.5	5.73		291.7		84.6		
	14641.2	4067	4.7		254.6		82.3		
+2°	15937.4	4427	9.58	505.1	560	82.3	1150		
	16868.8	4685.8	8.9	483.2		84.6			
	19093.8	5303.8	6.89	414.8		86.4			
	21163.6	5878.8	4.78	325.9		84.6			
	21991.5	6108.8	4.02	292.5		82.3			
+4°	17386.2	4829.5	9.9	569.8	630	82.3	1150		
	18628.1	5174.5	9.05	542.8		84.6			
	20904.9	5806.9	7.06	467.5		86			
	22767.7	6324.4	5.26	385.7		84.6			
	23802.6	6611.8	4.31	339.2		82.3			
	19145.5	5318.2	10.05	636.5		82.3	1150		
	20697.9	5749.4	8.8	586.5		84.6			


300QZ-50

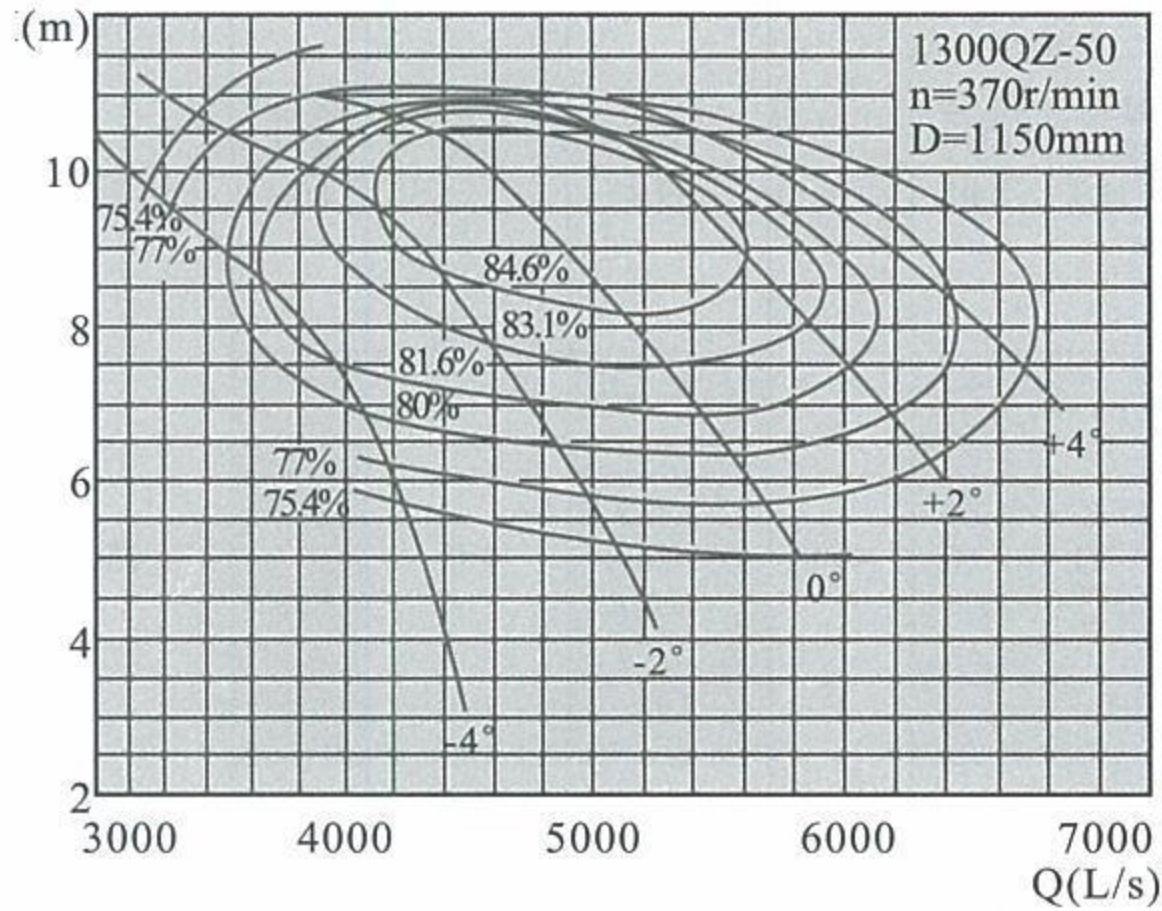

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	12608.1	3502.3	8.92	370	382.8	450	80	1150
	12936.2	3593.4	8.9		381.6		82.2	
	14691.9	4081.1	6.87		343.6		80	
-2°	13433.4	3731.5	10.23		467.8	560	80	
	15161.2	4211.4	9.19		447.1		84.9	
	17454	4848.3	6.48		384.9		80	
0°	14857.5	4127.1	10.78		545.4	630	80	
	16868.8	4685.8	9.66		516.4		86	
	19968.3	5546.7	6.34		431.3		80	
+2°	17284.8	4801.3	10.81		636.2	710	80	
	19404.3	5390.1	9.57		589.7		85.8	
	22208.8	6169.1	6.88		520.2		80	
+4°	19146.6	5318.5	10.67		695.4	800	80	
	21318.8	5921.9	9.36		659		82.5	
	23083.3	6412	8.36		657.2		80	

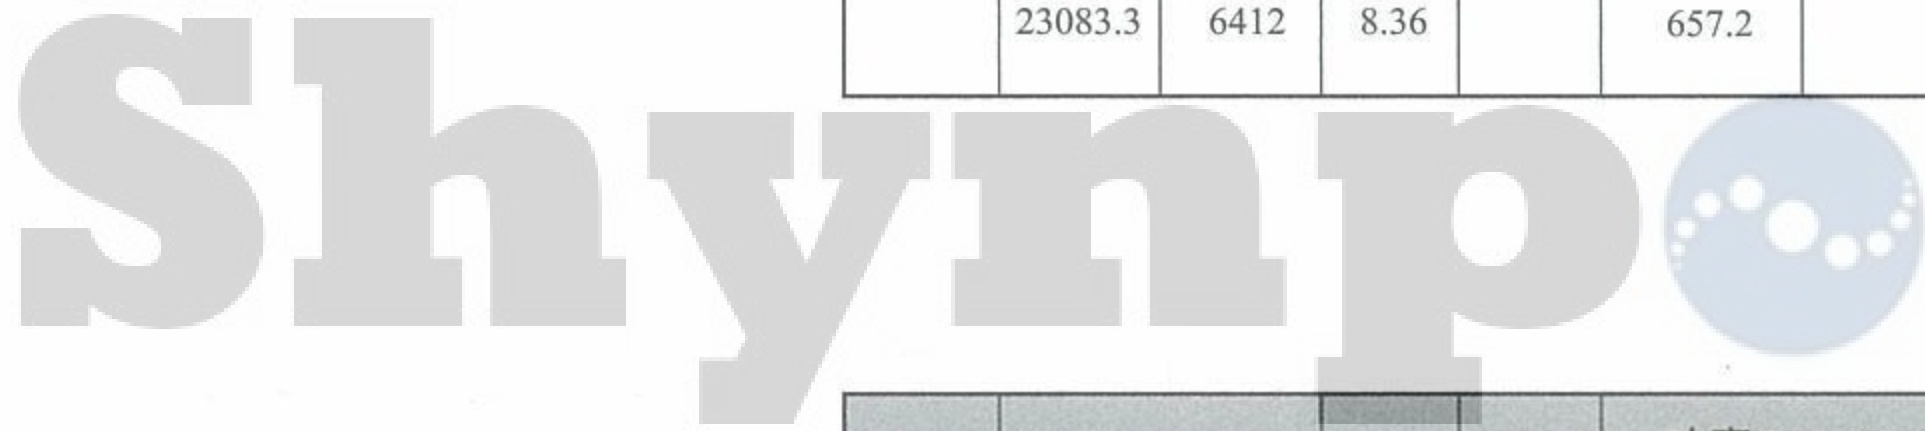


300QZ-75

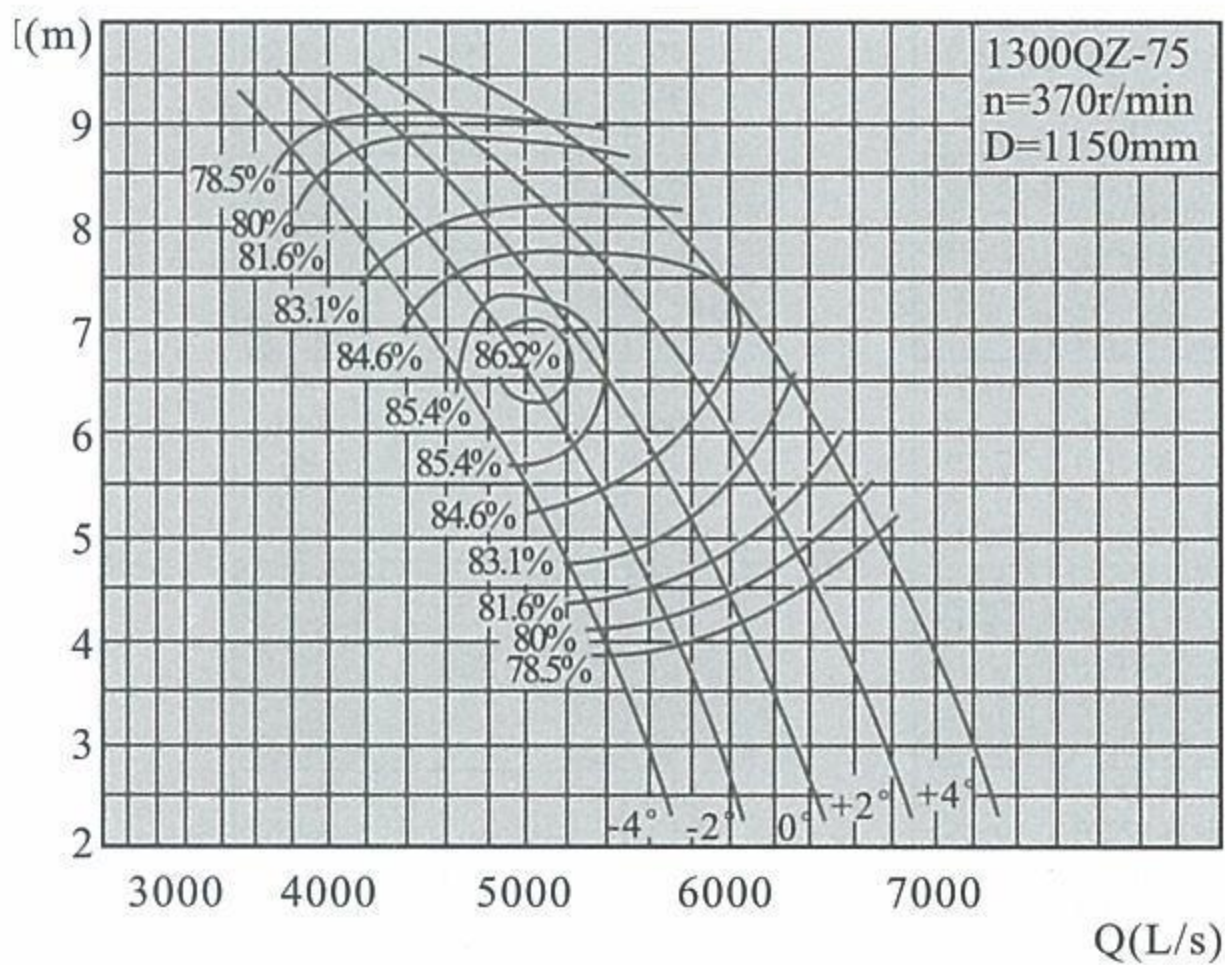

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率 Power(kw)		效率η Eff. (%)	叶轮外径 D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	15406.5	4279.6	7.75	370	391.5	450	83.1	1150
	17562.2	4878.4	6.07		338.1		85.9	
	18814.4	5226.2	4.81		296.9		83.1	
-2°	15926.5	4424	8.04		419.7	560	83.1	
	18333.2	5092.5	6.49		375		86.4	
	19927.4	5535.4	4.98		325.1		83.1	
0°	17135.3	4759.8	8.24		462.8	500	83.1	
	19192.1	5331.1	6.74		411		85.7	
	20912.6	5809.1	5.29		362.8		83.1	
+2°	18436.1	5121.1	8.31		502.6	560	83.1	
	20537.5	5704.9	6.88		451.6		85.2	
	22093.4	6137.1	5.89		427		83.1	
+4°	20365.7	5657.1	8.31		554.6	630	83.1	
	21489.6	5969.3	7.29		504.2		84.7	
	22637.3	6288.1	6.55		486.5		83.1	


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

1300QZ-100

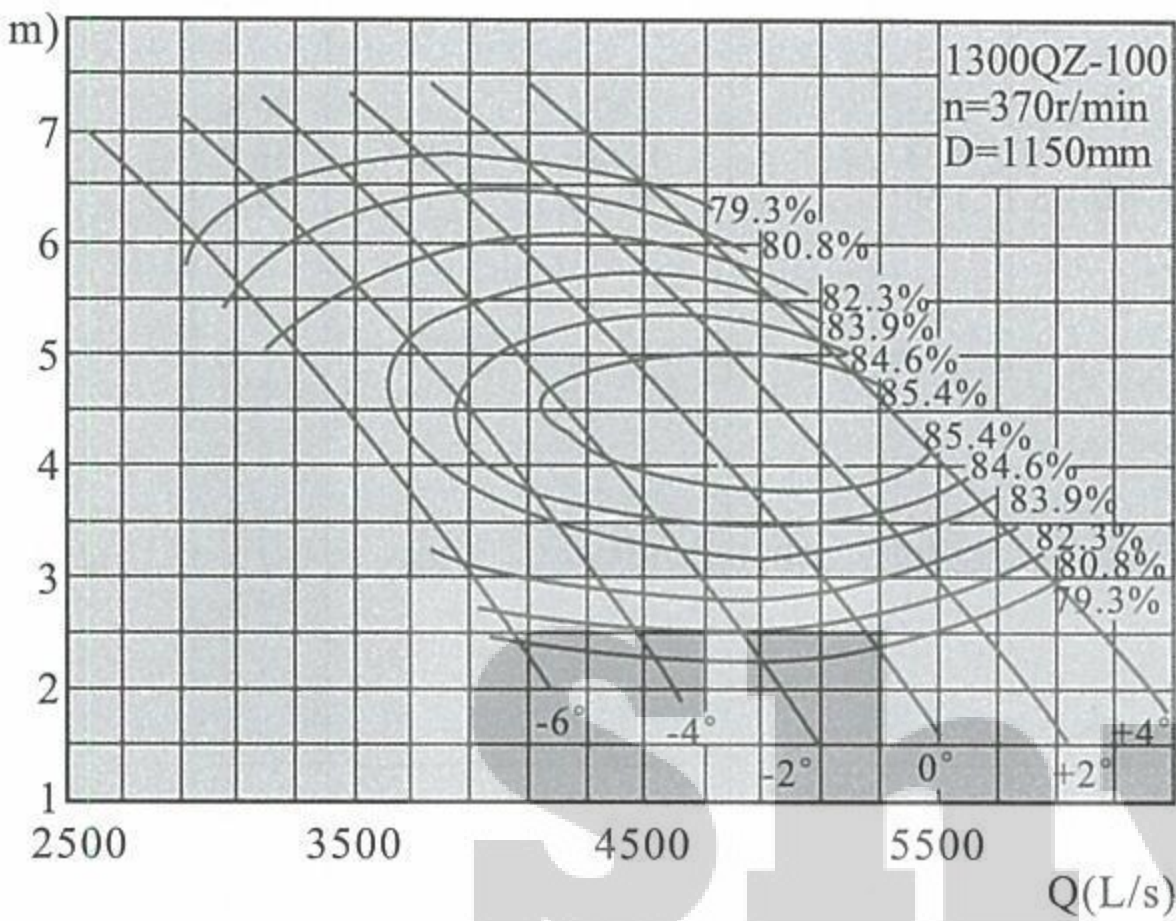


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)			
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power					
-6°	11874.9	3298.6	5.03	370	197.8	220	82.3	1150			
	12936.2	3593.4	3.86		162.1		83.9				
	13940	3872.2	3.11		143.5		82.3				
-4°	12606.6	3501.8	5.58		232.7	250	82.3		1150		
	14488.5	4024.6	3.92		182.8		84.7				
	15822	4395	2.78		145.8		82.3				
-2°	13494	3748.3	5.85		261.1	280	82.3			1150	
	15782.1	4383.9	4.02		202.9		85.2				
	17222.7	4784.1	2.81		160.3		82.3				
0°	14457.5	4016	5.98		286.1	315	82.3				1150
	17075.8	4743.3	4.03		219.4		85.4				
	18459.4	5127.6	2.85		174.2		82.3				
+2°	15785.2	4384.8	6.01	313.9	355	82.3	1150				
	18110.6	5030.7	4.24	243.8		85.8					
	19549.7	5430.5	3.08	199.3		82.3					
+4°	17253.8	4792.7	5.8	331.1	355	82.3		1150			
	19404.3	5390.1	4.26	263.1		85.6					
	20585.1	5718.1	3.37	229.4		82.3					

1300QZ-135

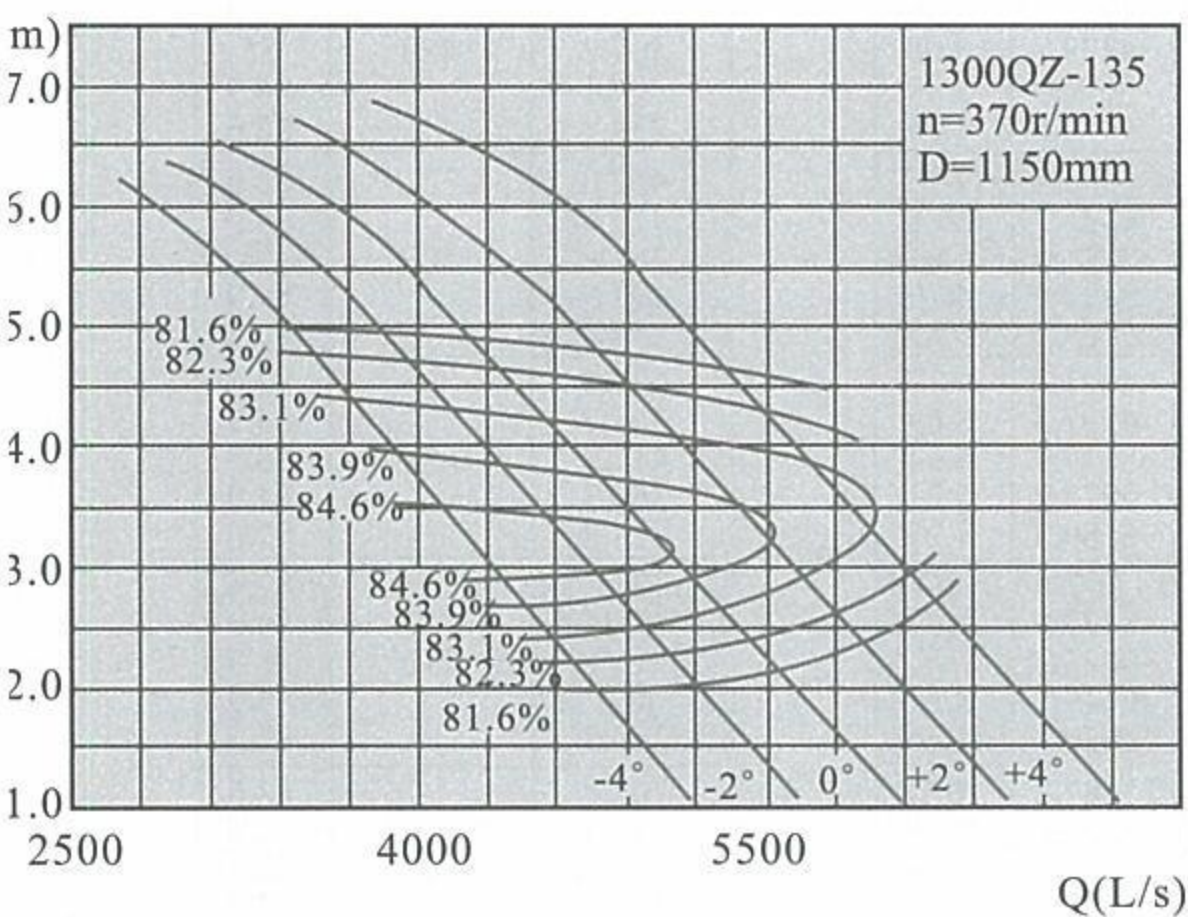


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)			
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power					
-4°	12424.4	3451.2	4.99	370	207.3	250	81.6	1150			
	16051.2	4458.7	2.76		141.4		85.3				
	17203.6	4778.8	1.98		113.8		81.6				
-2°	13859.3	3849.8	4.95		229	280	81.6		1150		
	17256.9	4793.6	2.95		163		85				
	18688.1	5191.1	2.1		130.8		81.6				
0°	15303	4250.8	4.9		250.4	315	81.6			1150	
	18400.4	5111.2	3.11		184.1		84.7				
	19983.8	5551.1	2.14		143.1		81.6				
+2°	17416.2	4837.8	4.63		269.4	355	81.6				1150
	19823.4	5506.5	3.22		207.1		84.1				
	21343.1	5928.7	2.36		168.5		81.6				
+4°	19180.2	5327.8	4.66	298.5	355	81.6	1150				
	21220.5	5884.6	3.4	225.2		83.7					
	22220.5	6284.6	2.4	175.2		81.6					


1300QZ-160

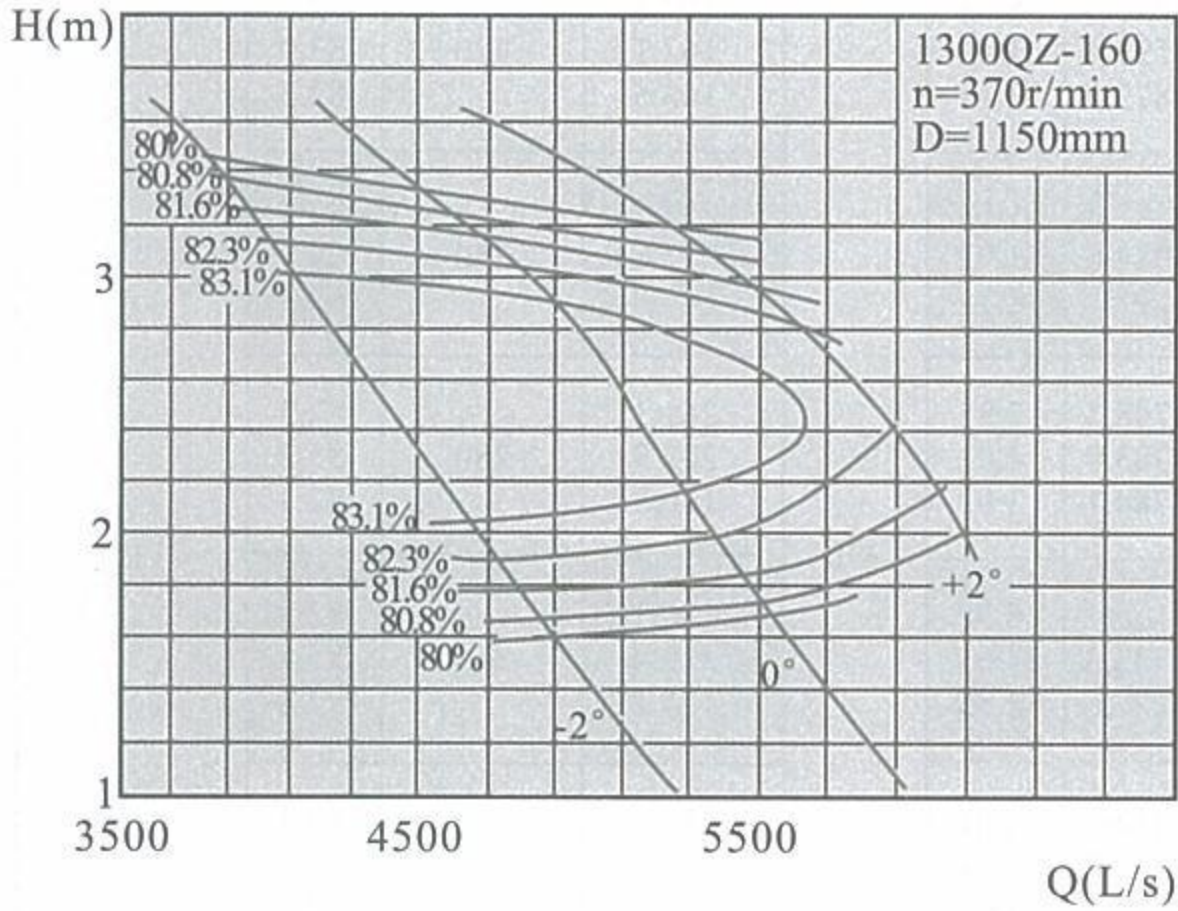

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	14047.7	3902.1	3.38	370	160	185	80.8	1150
	16040.9	4455.8	2.38		123.6			
	17522.8	4867.5	1.68		99.5			
0°	16593.5	4609.3	3.23		181	200	80.8	
	18628.1	5174.5	2.39		145.4			
	19804.3	5501.2	1.74		116.3			
+2°	19271.3	5353.1	3.09		200.8	220	80.8	
	20801.4	5778.2	2.58		177.8			
	21945.4	6096	2.01		148.7			

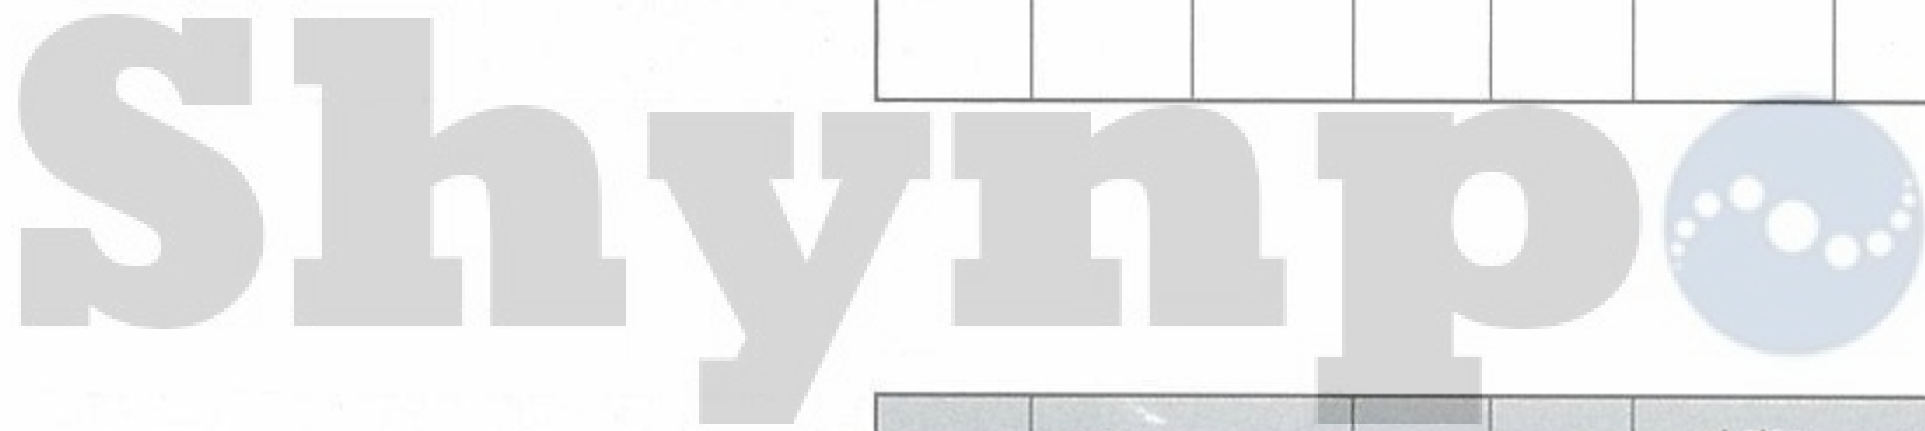


1400QH-72

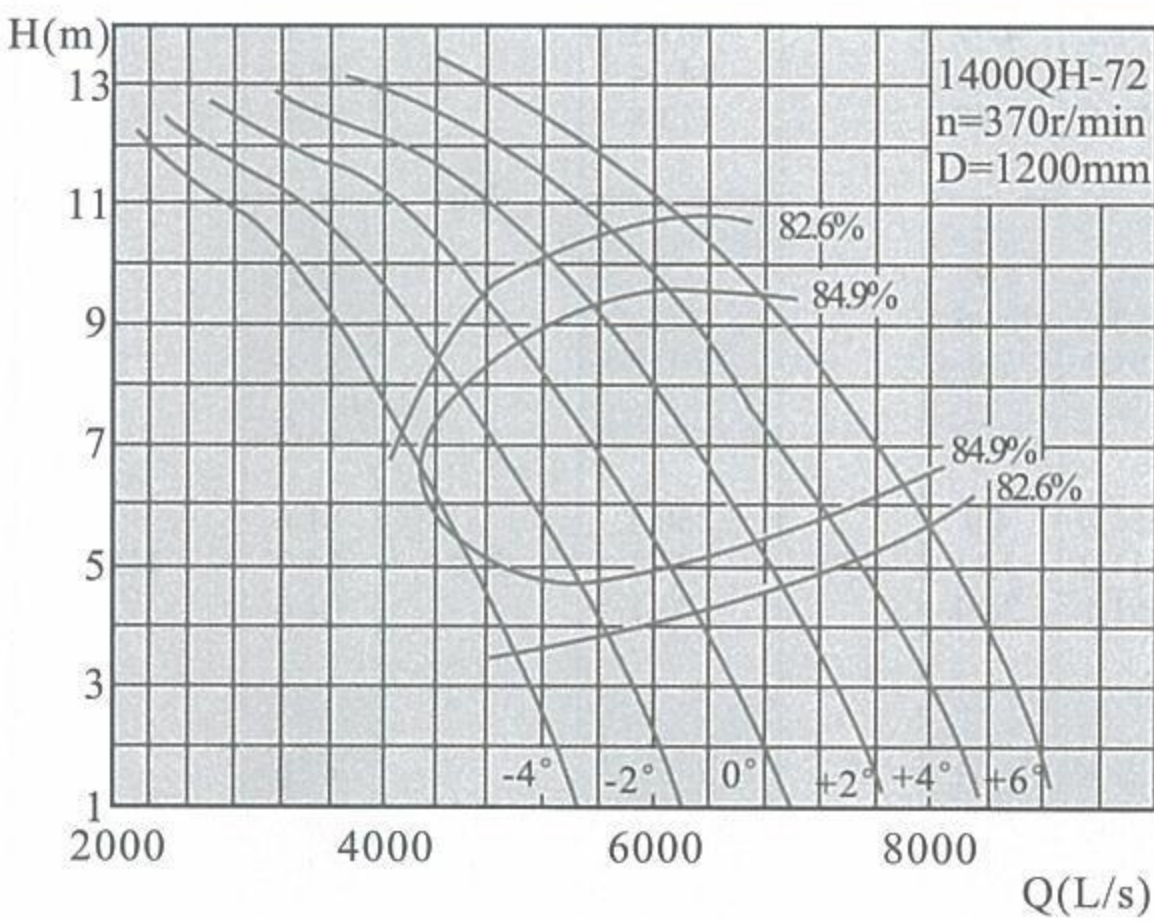

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	13345.7	3707.1	8.65	370	380.5	450	82.6	1200
	15285.8	4246.1	6.56		322			
	15756.2	4379.7	6.08		307.2			
	15815	4393	5.99		304.1			
	17519.9	4866.6	4.06		234.7			
-2°	14639.1	4066.4	9.38		452.6	500	82.6	
	15932.6	4425.7	8.28		423.5			
	17578.7	4883	6.61		367.9			
	19342.5	5372.9	4.79		297.5			
	20048	5568.9	3.85		254.8			
0°	16638.1	4621.7	9.79		537.3	630	82.6	
	17990.3	4997.3	8.69		501.7			
	20224.4	5617.9	6.54		417.9			
	21517.8	5977.2	5.21		359.7			
	22282.1	6189.5	4.27		313.8			
+2°	18107.8	5030	10.43	622.7	710	82.6		
	19166.1	5323.9	9.69	596				
	21694.1	6026.2	7.5	511.8				
	24045.8	6679.4	5.21	402				
	24986.5	6940.7	4.38	360.5				
+4°	19754	5487.2	10.78	702.4	800	82.6		
	21165	5879.2	9.86	669.5				
	23751.9	6597.7	7.69	576.8				
	25868.4	7185.7	5.73	475.7				
	27044.2	7512.3	4.69	418.1				
+6°	21752.9	6042.5	10.94	784.6	900	82.6		
	23516.7	6532.4	9.58	723.4				
	25221.6	7006	8.48	677.7				
	27632.1	7675.6	6.46	572.8				
	28220	7838.9	5.83	542.9				


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

400QZ-75

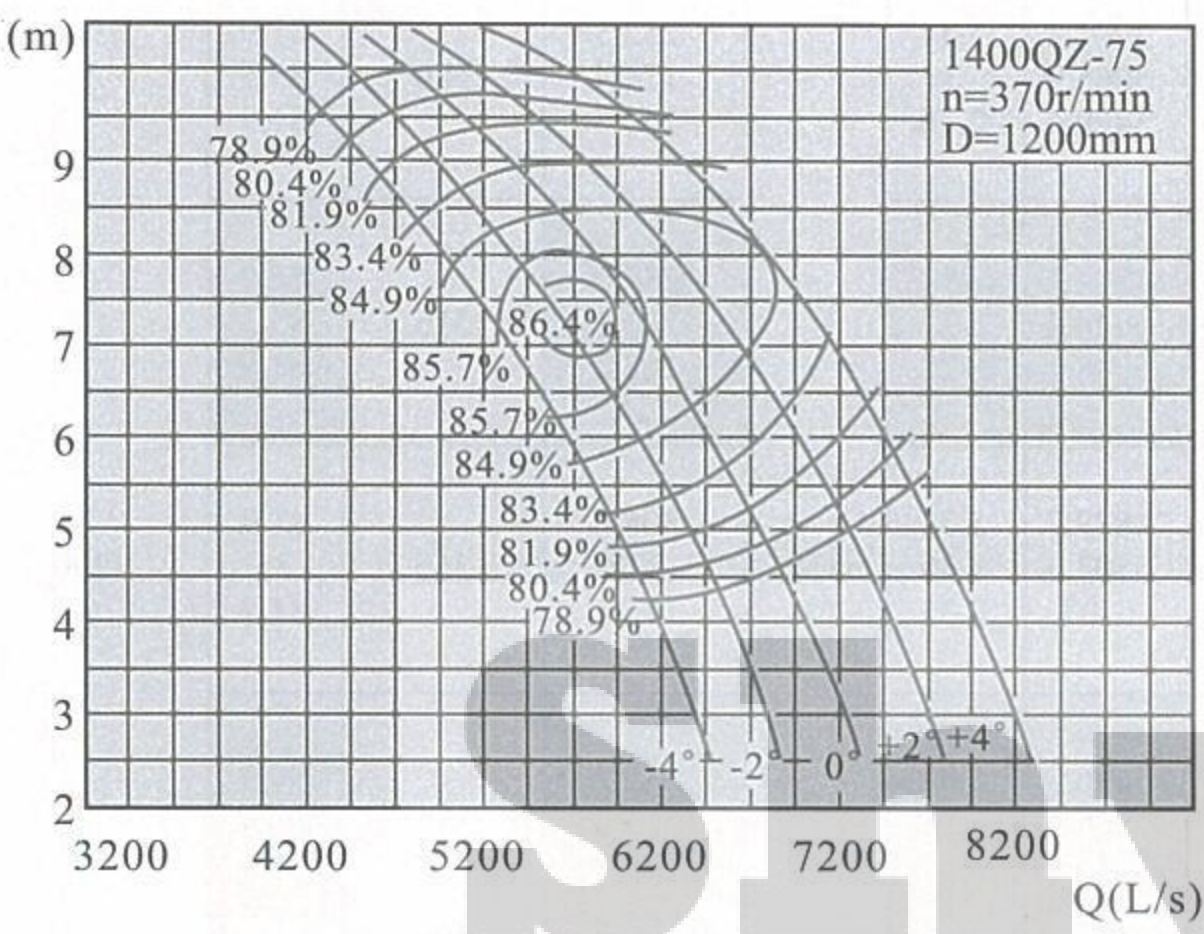


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-4°	17504.6	4862.4	8.44	370	482.7	560	83.4	1200	
	19953.9	5542.8	6.61		417.1				
	21376.7	5938	5.24		366				
-2°	18095.5	5026.5	8.75		517.4		83.4		
	20829.9	5786.1	7.06		462.7		86.6		
	22641.3	6289.2	5.42		400.8		83.4		
0°	19468.9	5408	8.97		570.6	630	83.4		
	21805.8	6057.2	7.33		507		86		
	23760.7	6600.2	5.76		447.3		83.4		
+2°	20946.9	5818.6	9.05		619.7		710		83.4
	23334.4	6481.8	7.49		557.1				85.5
	25102.3	6972.9	6.42		526.4				83.4
+4°	23139.2	6427.6	9.04	683.7	800	83.4			
	24416.2	6782.3	7.94	621.9		84.9			
	25720.2	7144.5	7.14	599.8		83.4			

400QZ-100

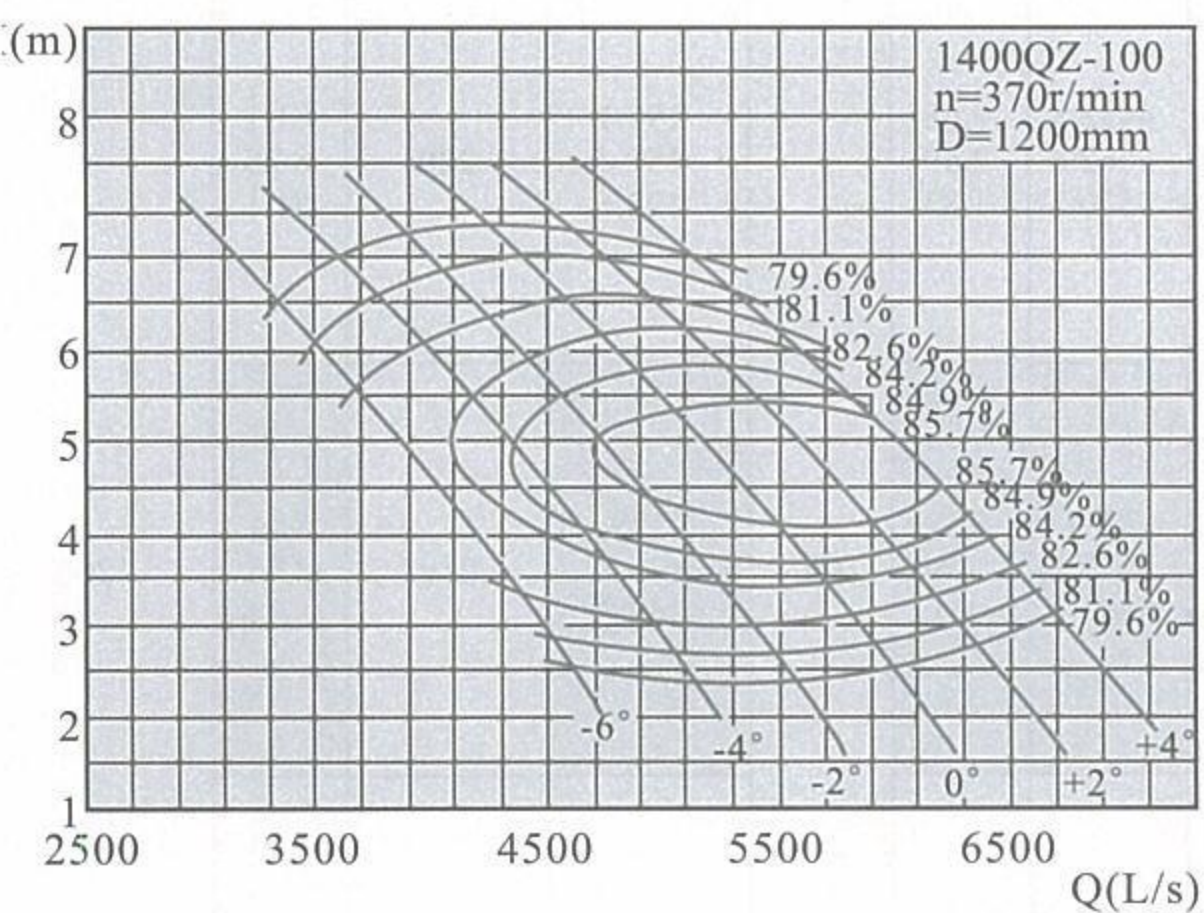

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)	
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power			
-6°	13492.1	3747.8	5.48	370	243.8	280	82.6	1200	
	14697.9	4082.8	4.2		199.8		84.2		
	15838.5	4399.6	3.39		176.8		82.6		
-4°	14323.4	3978.7	6.07		286.9		315		82.6
	16461.7	4572.7	4.27		225.5				85
	17976.7	4993.5	3.03		179.7				82.6
-2°	15331.7	4258.8	6.37		321.8	355			82.6
	17931.5	4981	4.38		250.3				85.4
	19568.2	5435.6	3.06		197.6				82.6
0°	16426.4	4562.9	6.51		352.7		400		82.6
	19401.3	5389.2	4.39		270.7				85.7
	20973.4	5825.9	3.1		214.7				82.6
+2°	17935	4981.9	6.54	386.9	450	82.6			
	20577.1	5715.9	4.62	300.8		86			
	22212.1	6170	3.35	245.7		82.6			
	19603.5	5445.4	6.31	408.1		82.6			


1400QZ-135

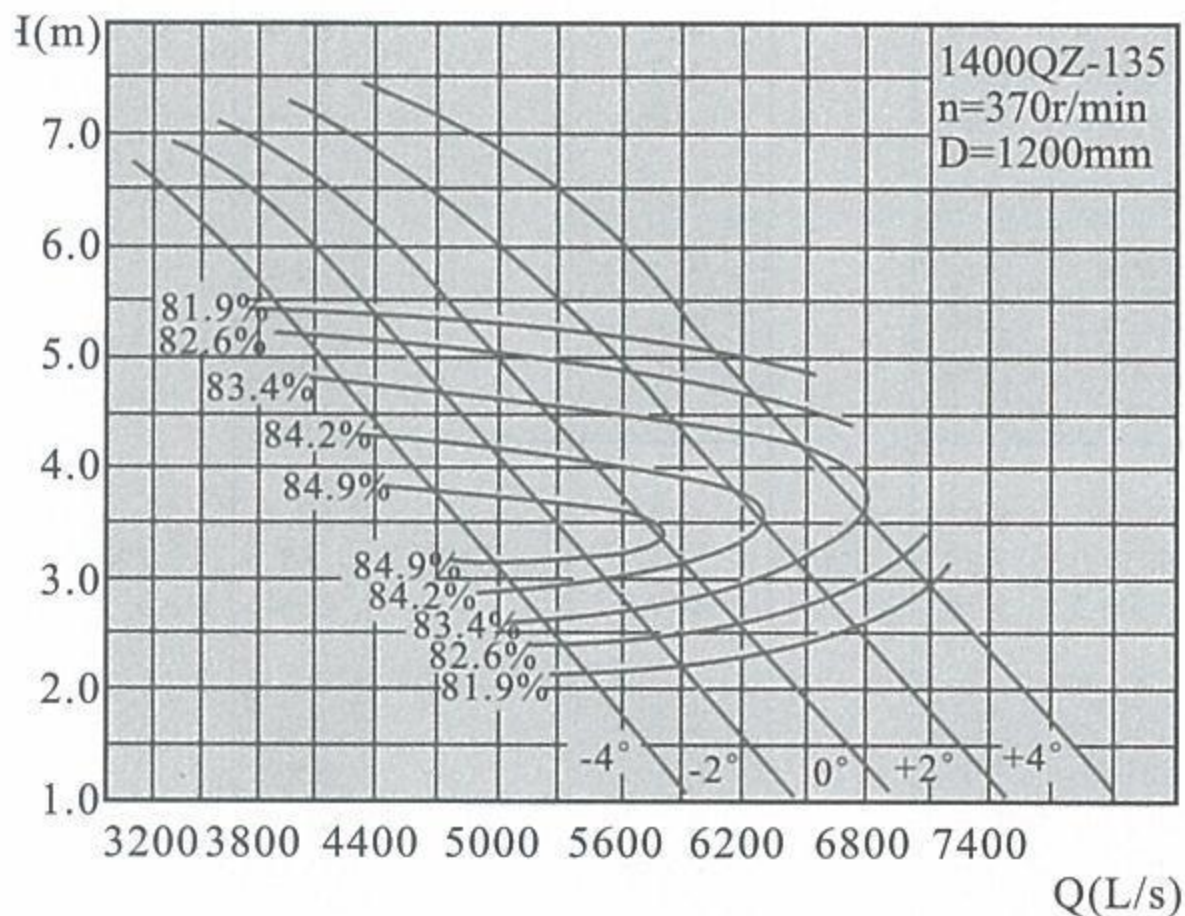

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转 n Speed (r/min)	功率Power(kw)		效率 η Eff. (%)	叶轮外径 ϕ Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	14116.5	3921.2	5.44	370	255.5	280	81.9	1200
	18237.2	5065.9	3		174.4		85.5	
	19546.5	5429.6	2.16		140.3		81.9	
-2°	15746.8	4374.1	5.39		282.2	315	81.9	
	19607	5446.4	3.21		201.1		85.3	
	21233.2	5898.1	2.28		161.2		81.9	
0°	17387.1	4829.7	5.33		308.6	355	81.9	
	20906.3	5807.3	3.39		227		85	
	22705.4	6307	2.33		176.3		81.9	
+2°	19788.1	5496.7	5.04		332	400	81.9	
	22523.1	6256.4	3.51		255.4		84.4	
	24249.8	6736.1	2.57		207.7		81.9	
+4°	21792.3	6053.4	5.07	367.9	400	81.9		
	24110.5	6697.4	3.7	290.1		83.8		
	25535	7093.1	2.97	252.3		81.9		




1400QZ-160

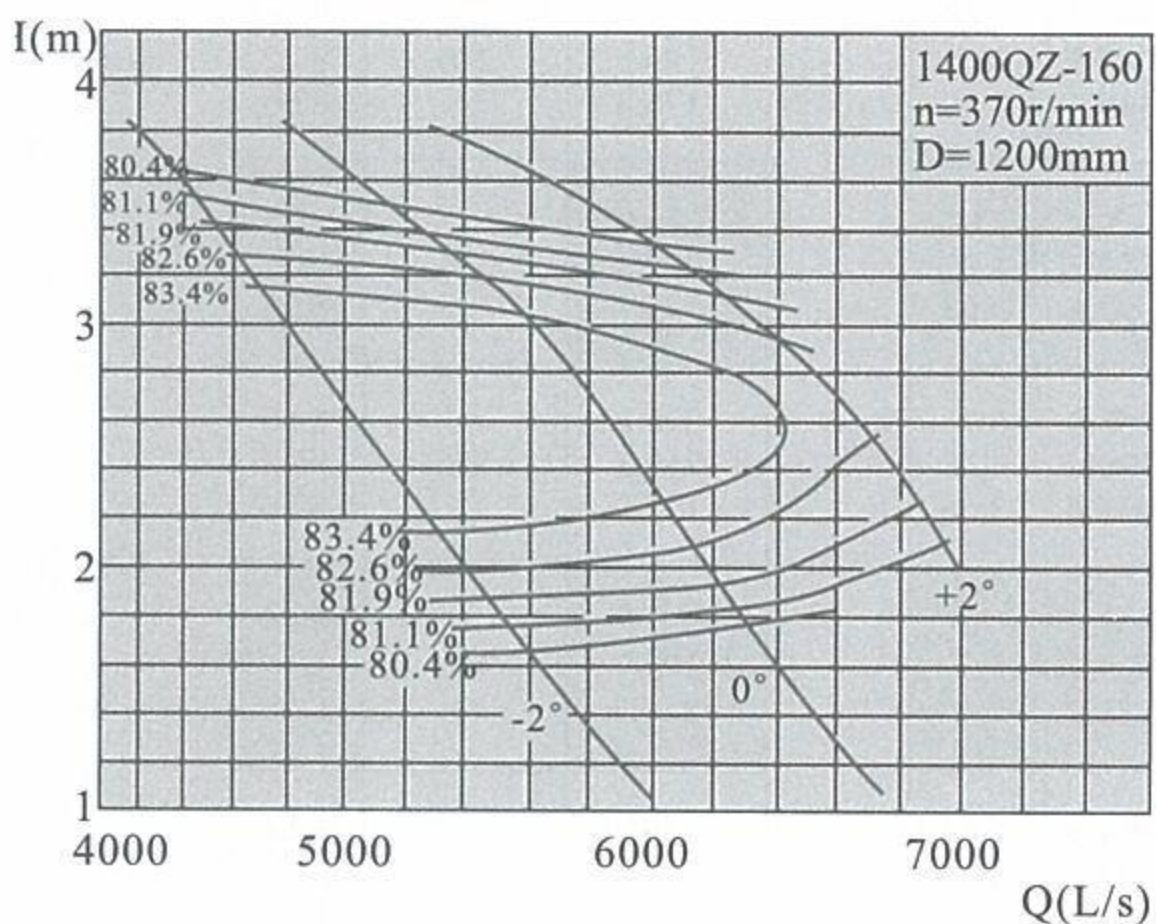

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转 n Speed (r/min)	功率Power(kw)		效率 η Eff. (%)	叶轮外径 ϕ Outer diameter of impeller (mm)
	(m ³ /h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	15960.8	4433.5	3.68	370	197.1	220	81.1	1200
	18225.4	5062.6	2.59		152.4		84.5	
	19909.2	5530.3	1.83		122.6		81.1	
0°	18853.3	5237	3.52		223	250	81.1	
	21165	5879.2	2.6		179.3		83.8	
	22501.4	6250.4	1.9		143.3		81.1	
+2°	21895.8	6082.2	3.37		247.5	280	81.1	
	23634.3	6565.1	2.81		219.2		82.6	
	24934.2	6926.2	2.19		183.2		81.1	


QZ、QH型潜水轴流泵、混流泵性能曲线图与性能参数表 CURVE AND SPECIFICATION

600QZ-75

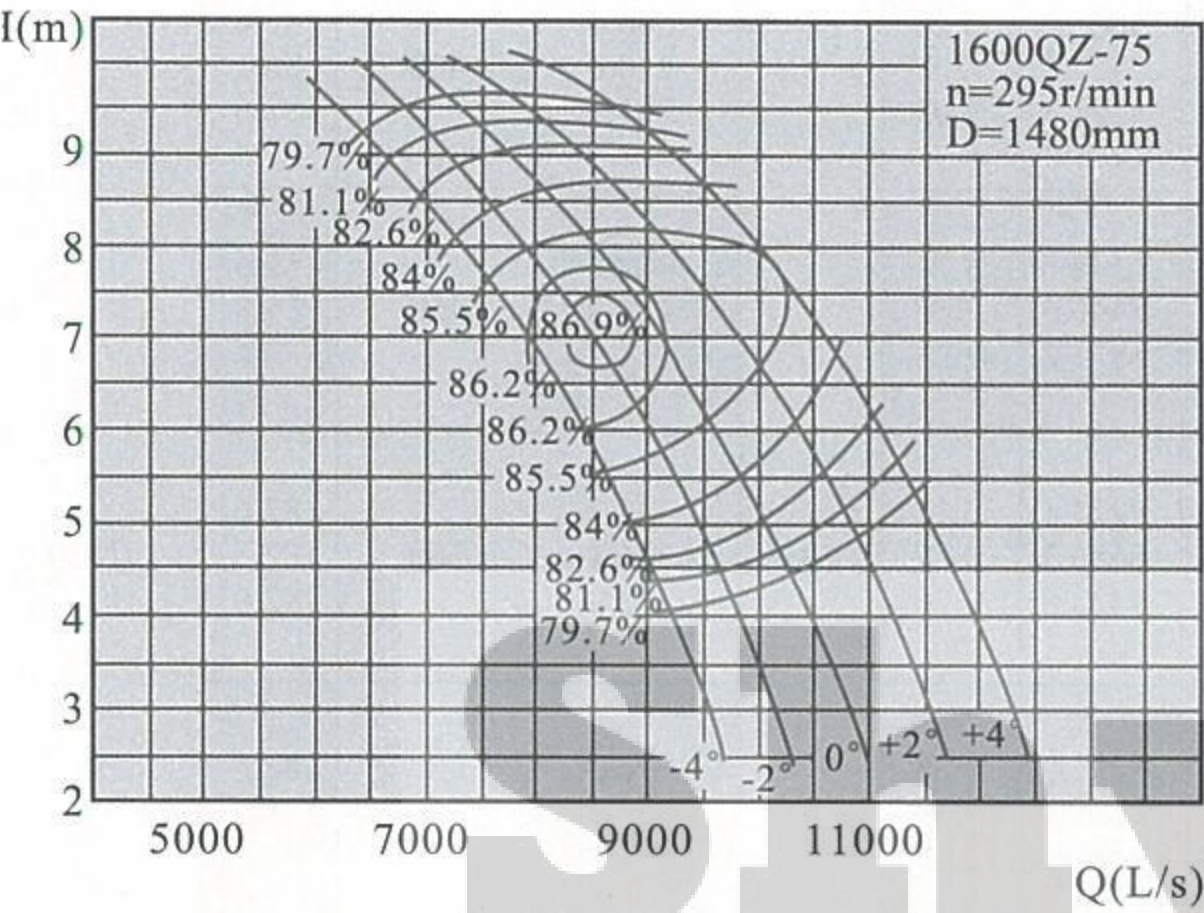


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	26182.7	7273	8.16	295	692.9	800	84	1480
	29846.2	8290.6	6.39					
	31974.4	8881.8	5.07					
-2°	27066.5	7518.5	8.46		742.8	800	84	
	31156.5	8654.6	6.83					
	33865.9	9407.2	5.24					
0°	29120.8	8089.1	8.67		819.1	900	84	
	32616.3	9060.1	7.09					
	35540.3	9872.3	5.57					
+2°	31331.5	8703.2	8.75		889.5	1000	84	
	34902.7	9695.2	7.24					
	37547	10429.7	6.21					
+4°	34610.7	9614.1	8.74		981.5	1120	84	
	36520.8	10144.7	7.68					
	38471.2	10686.5	6.9					

600QZ-100

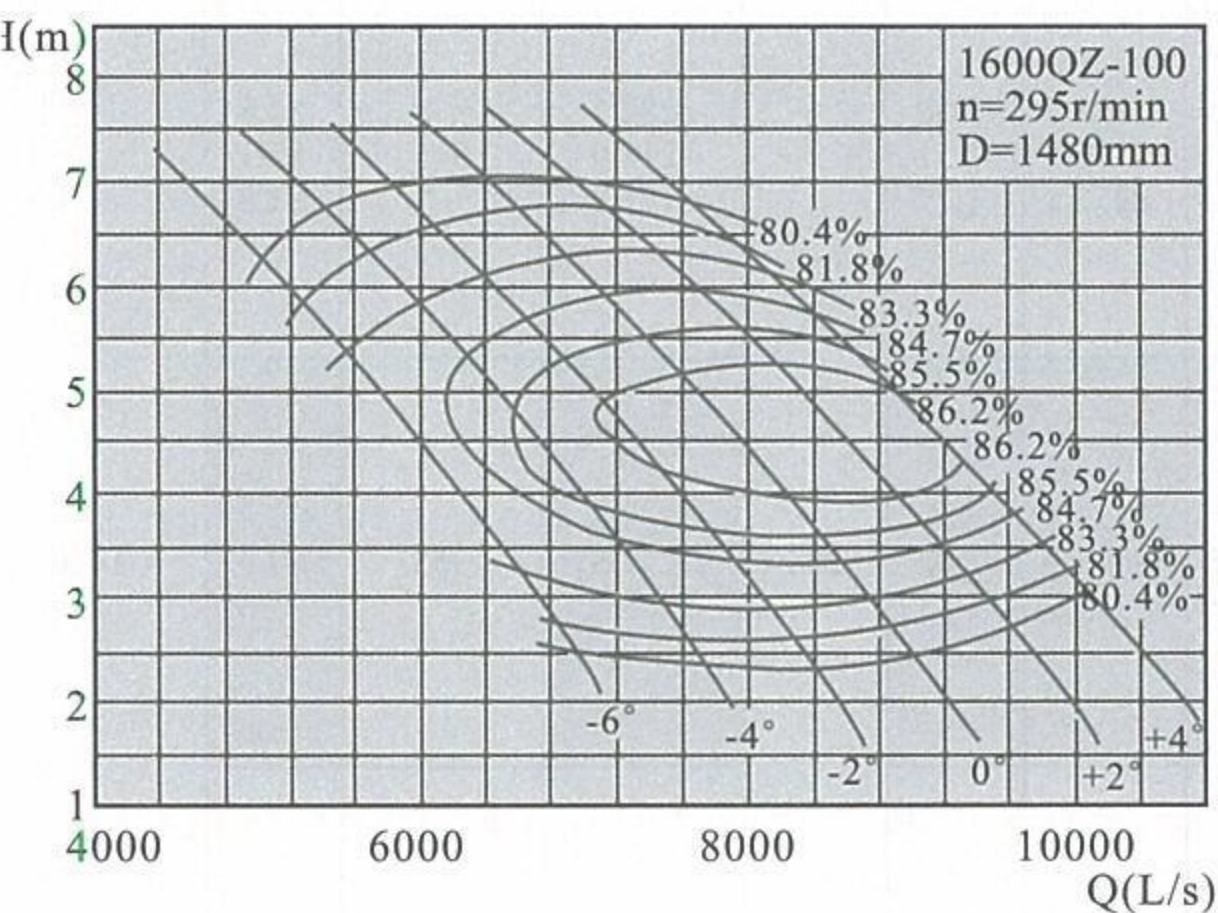


叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径D Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-6°	20181	5605.8	5.3	295	349.8	400	83.3	1480
	21984.6	6106.8	4.06					
	23690.6	6580.7	3.27					
-4°	21424.4	5951.2	5.87		411.6	450	83.3	
	24622.7	6839.6	4.13					
	26888.9	7469.1	2.93					
-2°	22932.5	6370.2	6.16		461.8	500	83.3	
	26821.2	7450.3	4.23					
	29269.4	8130.4	2.96					
0°	24569.9	6825	6.3		506.1	560	83.3	
	29019.6	8061	4.24					
	31371.1	8714.2	3					
+2°	26826.4	7451.8	6.33		555.2	630	83.3	
	30778.4	8549.6	4.46					
	33224	9228.9	3.24					
	29322.1	8145	6.1	585.6	630	83.3		


1600QZ-135

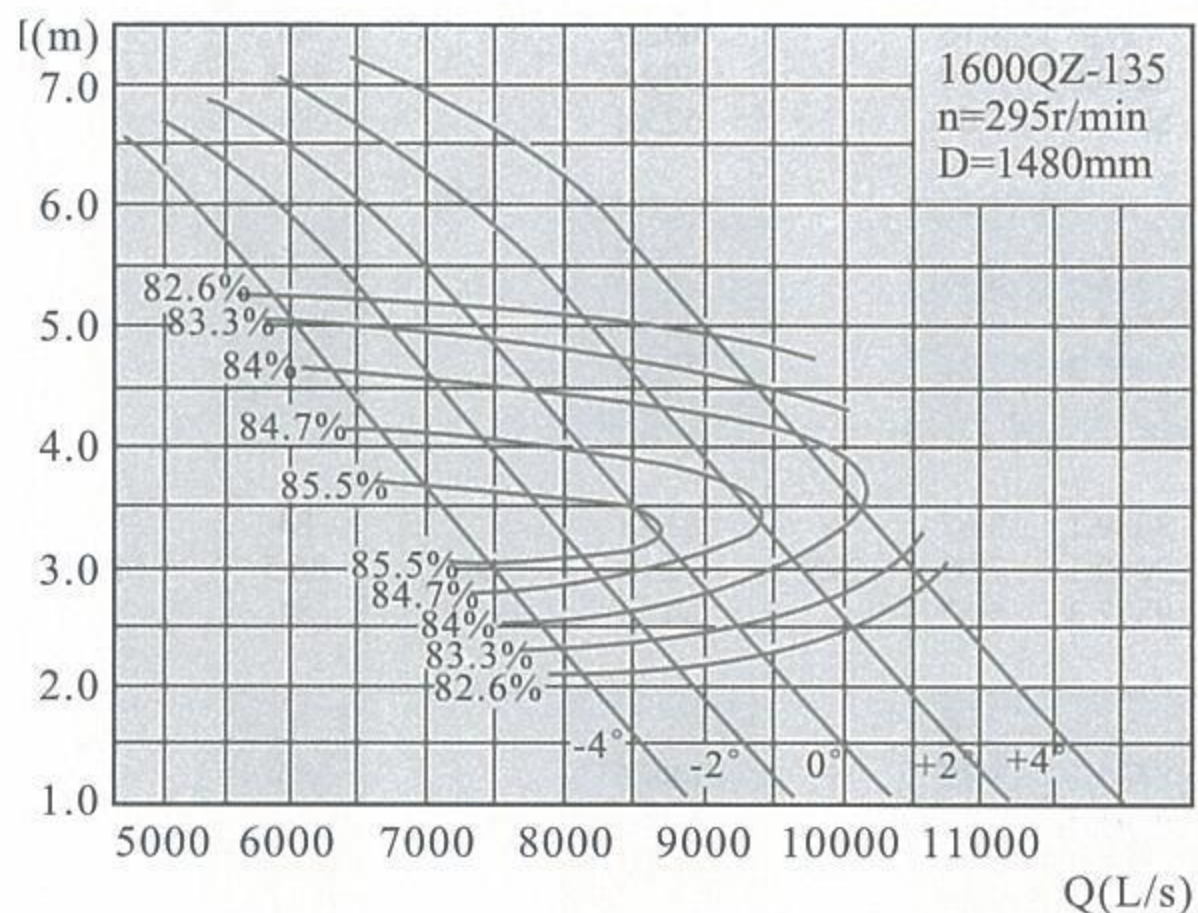

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-4°	21114.9	5865.2	5.26	295	366.4	400	82.6	1480
	27278.5	7577.3	2.9		250.6		86.1	
	29236.8	8121.3	2.09		201.2		82.6	
-2°	23553.4	6542.6	5.21		404.8	450	82.6	
	29327.4	8146.5	3.1		288.9		85.8	
	31759.8	8822.2	2.21		231.2		82.6	
0°	26006.9	7224.1	5.16		442.7	500	82.6	
	31270.8	8686.3	3.27		326.1		82.5	
	33961.8	9433.8	2.26		252.9		82.6	
+2°	29598.3	8221.7	4.88		476.3	560	82.6	
	33689.2	9358.1	3.39		366.9		85	
	36271.9	10075.5	2.49		297.8		82.6	
+4°	32596.1	9054.5	4.91		527.7	630	82.6	
	36063.5	10017.6	3.58		416.5		84.4	
	38194.2	10609.5	2.87		361.9		82.6	

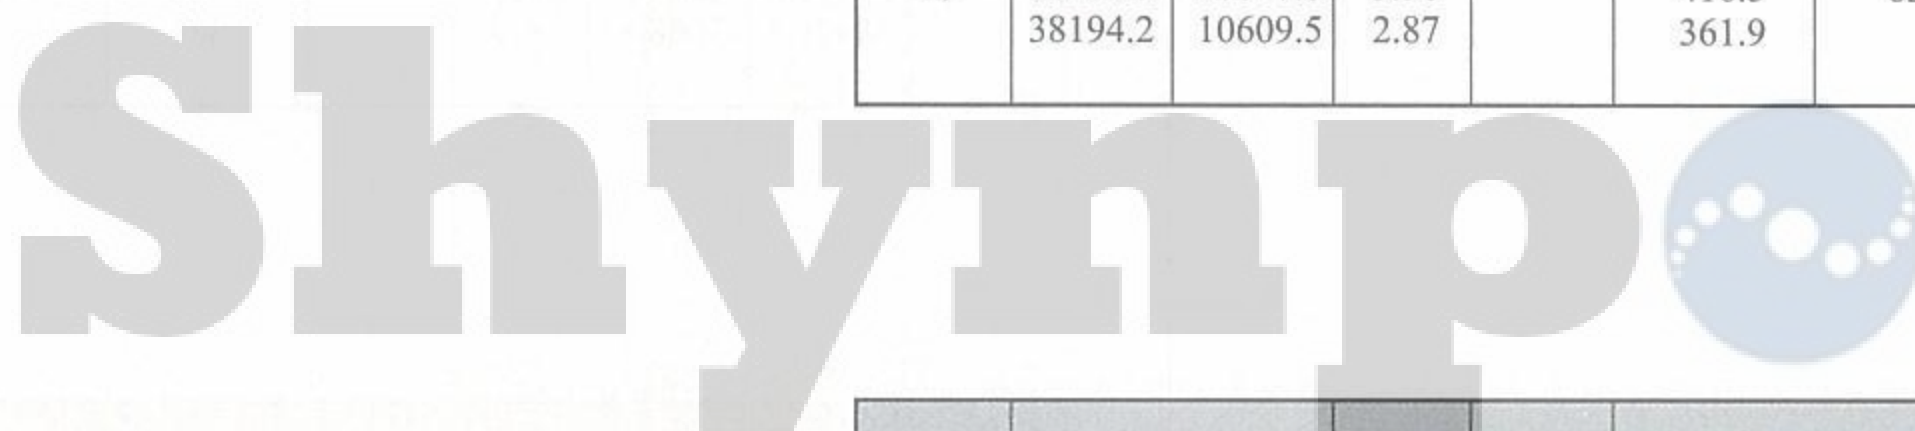

1600QZ-160

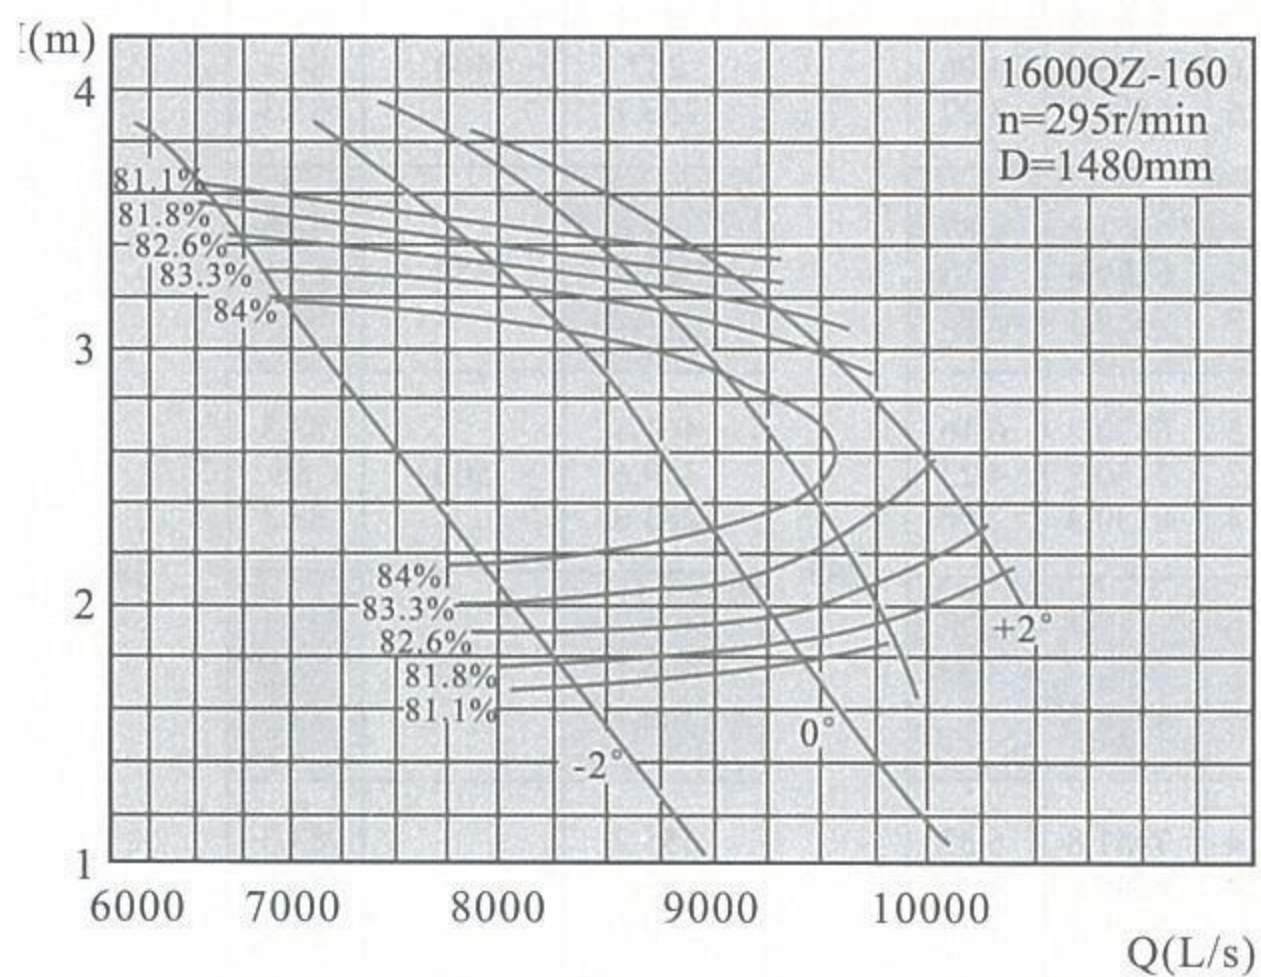

叶片安装角度 Angle	流量Q Capacity		扬程H Head (m)	速转n Speed (r/min)	功率Power(kw)		效率η Eff. (%)	叶轮外径 Outer diameter of impeller (mm)
	(m³/h)	(L/s)			轴功率 Shaft power	电机功率 Motor power		
-2°	23873.5	6631.5	3.56	295	282.7	315	81.8	1480
	27260.9	7572.5	2.51		218.9		85.1	
	29779.4	8272.1	1.77		175.8		81.8	
0°	28200	7833.3	3.4		319.7	355	81.8	
	31657.8	8793.8	2.52		257.5		84.4	
	33656.6	9349.1	1.83		205.4		81.8	
+2°	32750.8	9097.5	3.25		354.8	400	81.8	
	35351.2	9819.8	2.72		314.6		83.3	
	37295.5	10359.9	2.12		2627.7		81.8	