

OLEO1B BELT TRACK SERIES



OLEDER LIGHTING CO.,LIMITED

Tel : 86-20-37716973

Ceil : 0086-15920570517

Email : r.oyoung@oleder-lighting.com
oleever@oleder-lighting.com

Web: www.oleder-lux.com

Add: Room 335,Building 2, #1 Xianke 1st Rd, Honglitronic
Group,Huadu ,510890,Guangzhou,P.R.C.



LVD



LM79
LM80



OLEO1B BELT TRACK SERIES

VERSATILE LIGHTING SYSTEM

Taking the concept of the light rail to a new level.
It allows free placement of the luminaires and the
creation of unique lighting solutions .

Simple and progressive, merges the design of
a belt with a groundbreaking lighting concept.
Featuring a textural, fabric belt that conducts
electricity, it enables light to flow in space.




POWER SUPPLY INSTALLATION DEMONSTRATION

The belt flows in and out of the canopy, establishing conductivity and electrical connection where needed



FIXED CYLINDER AND FIXED RING-RECESSED INSTALLATION DEMONSTRATION

cylinder bracket fix on the ceiling to hold the belt or as a feeder, recessed ring fixed on the ceiling to hold the belt or as a feeder.




MULTIPLE COLORS AVAILABLE

There are five colors to choose from for the belt:
Brick red, dark blue, beige, light green, black.
According to the different application, create your
own unique style


CONNECTION BETWEEN THE TRACK AND THE BELT

connector for ultrathin track and belt
to conduct the electricity, The belt
adapter can be rotated horizontally
355°

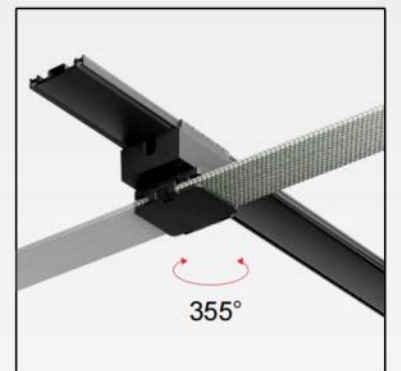



HOME DECORATION SCENE

Suitable for home decoration scenarios such as living room, study, and dining table at home.

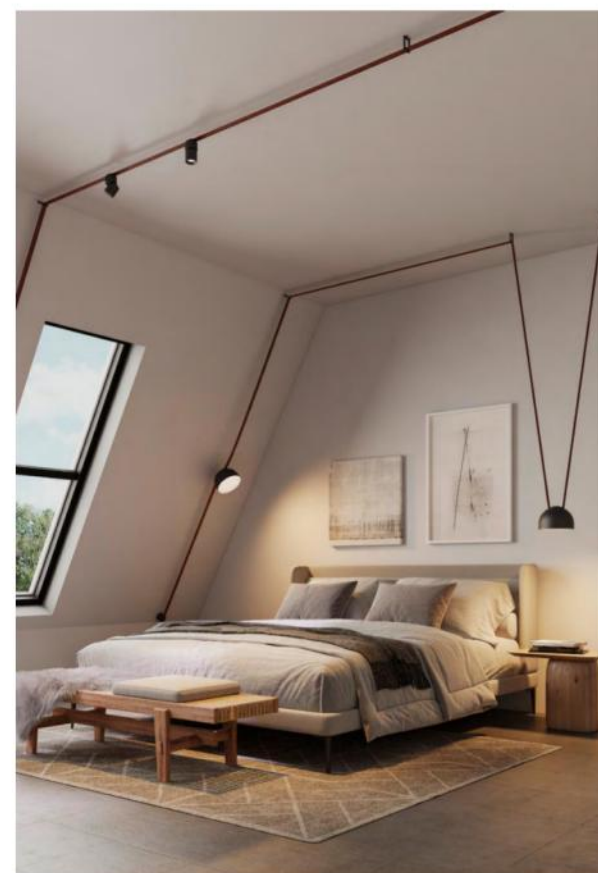




Both object of beauty and high-performance lighting toolkit, offers personalised atmospheres while doubling as striking visual sculpture.

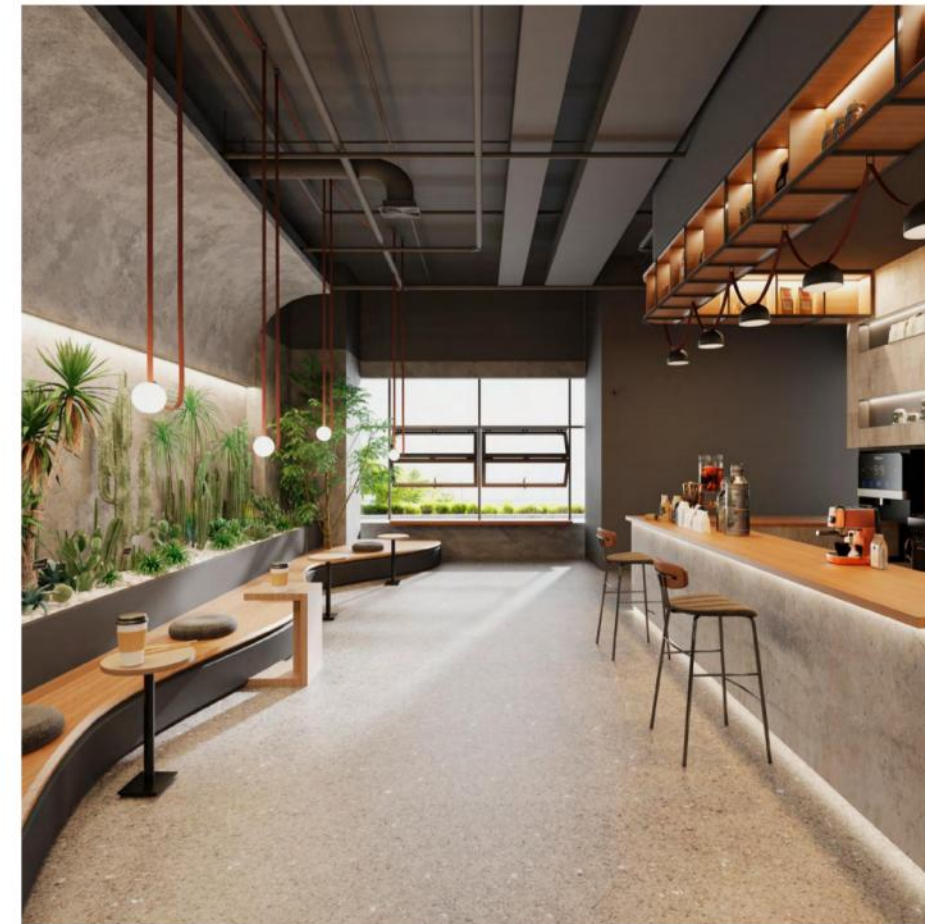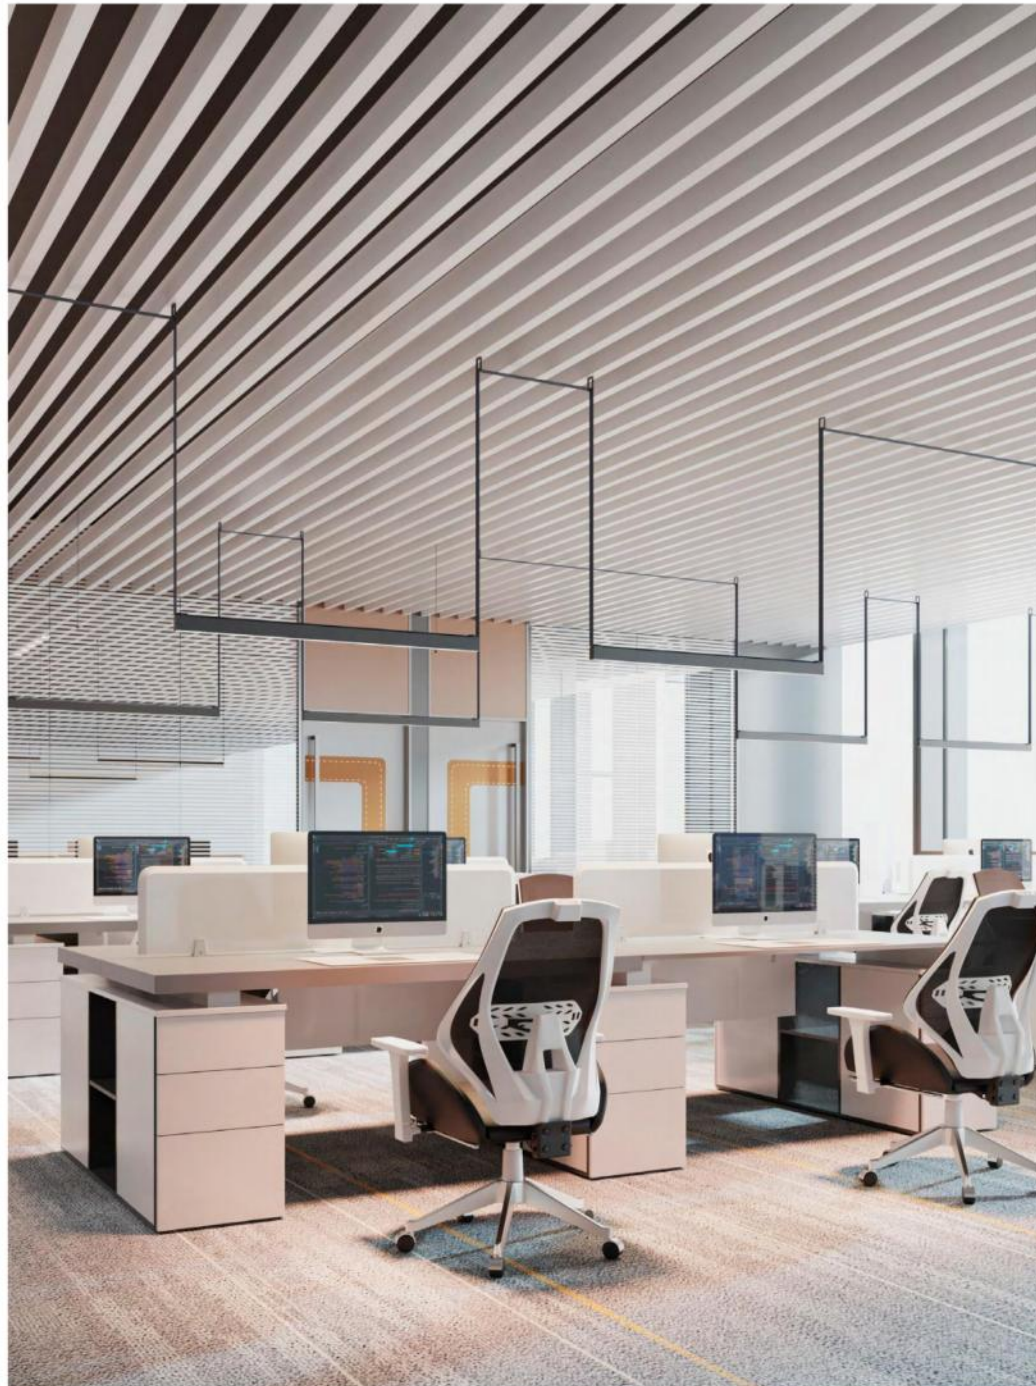


WORKWEAR SCENARIO

Suitable for workwear scenarios such as restaurants, bars, and front desk.

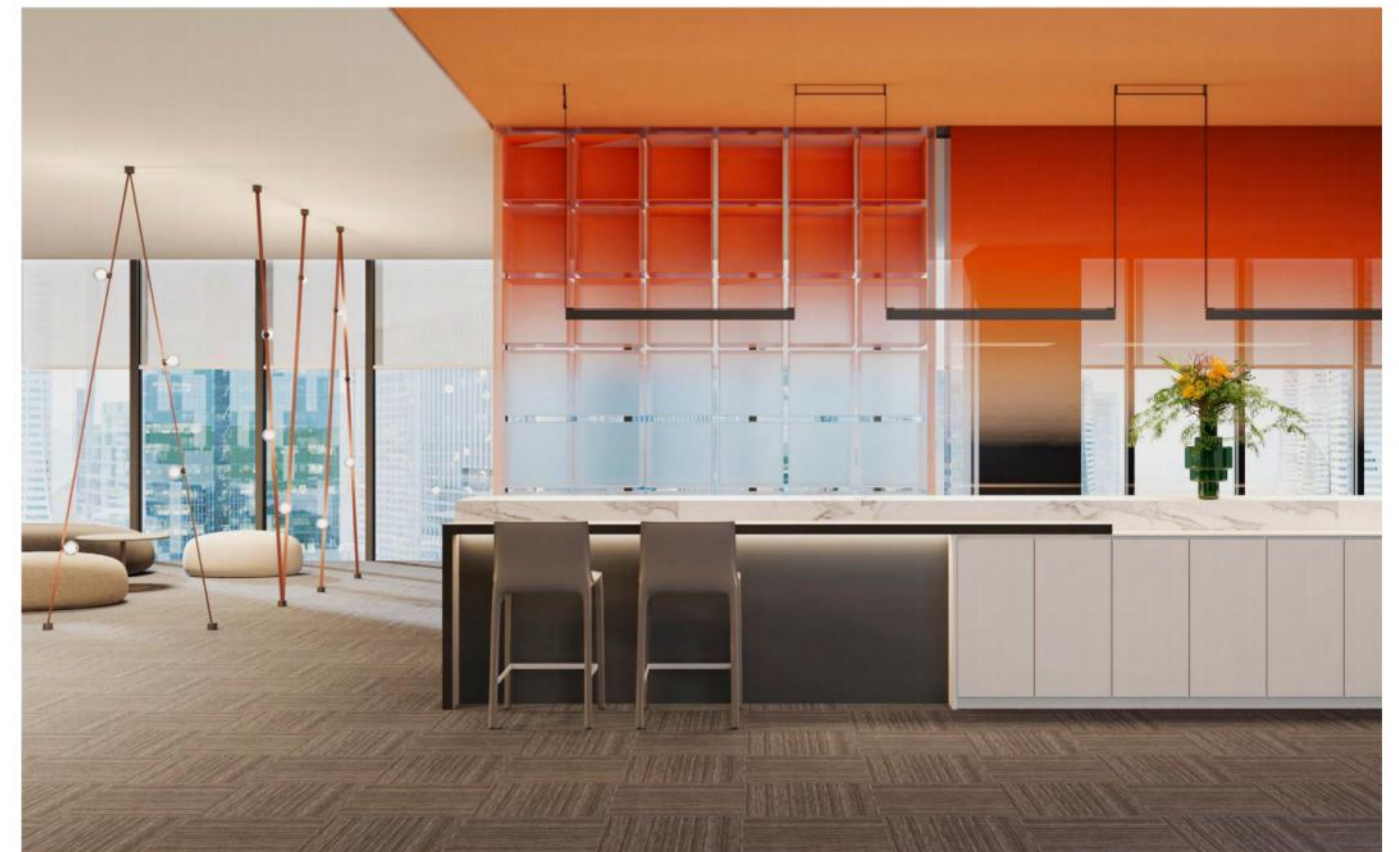

A VARIETY OF MODELING LINE DRAWINGS

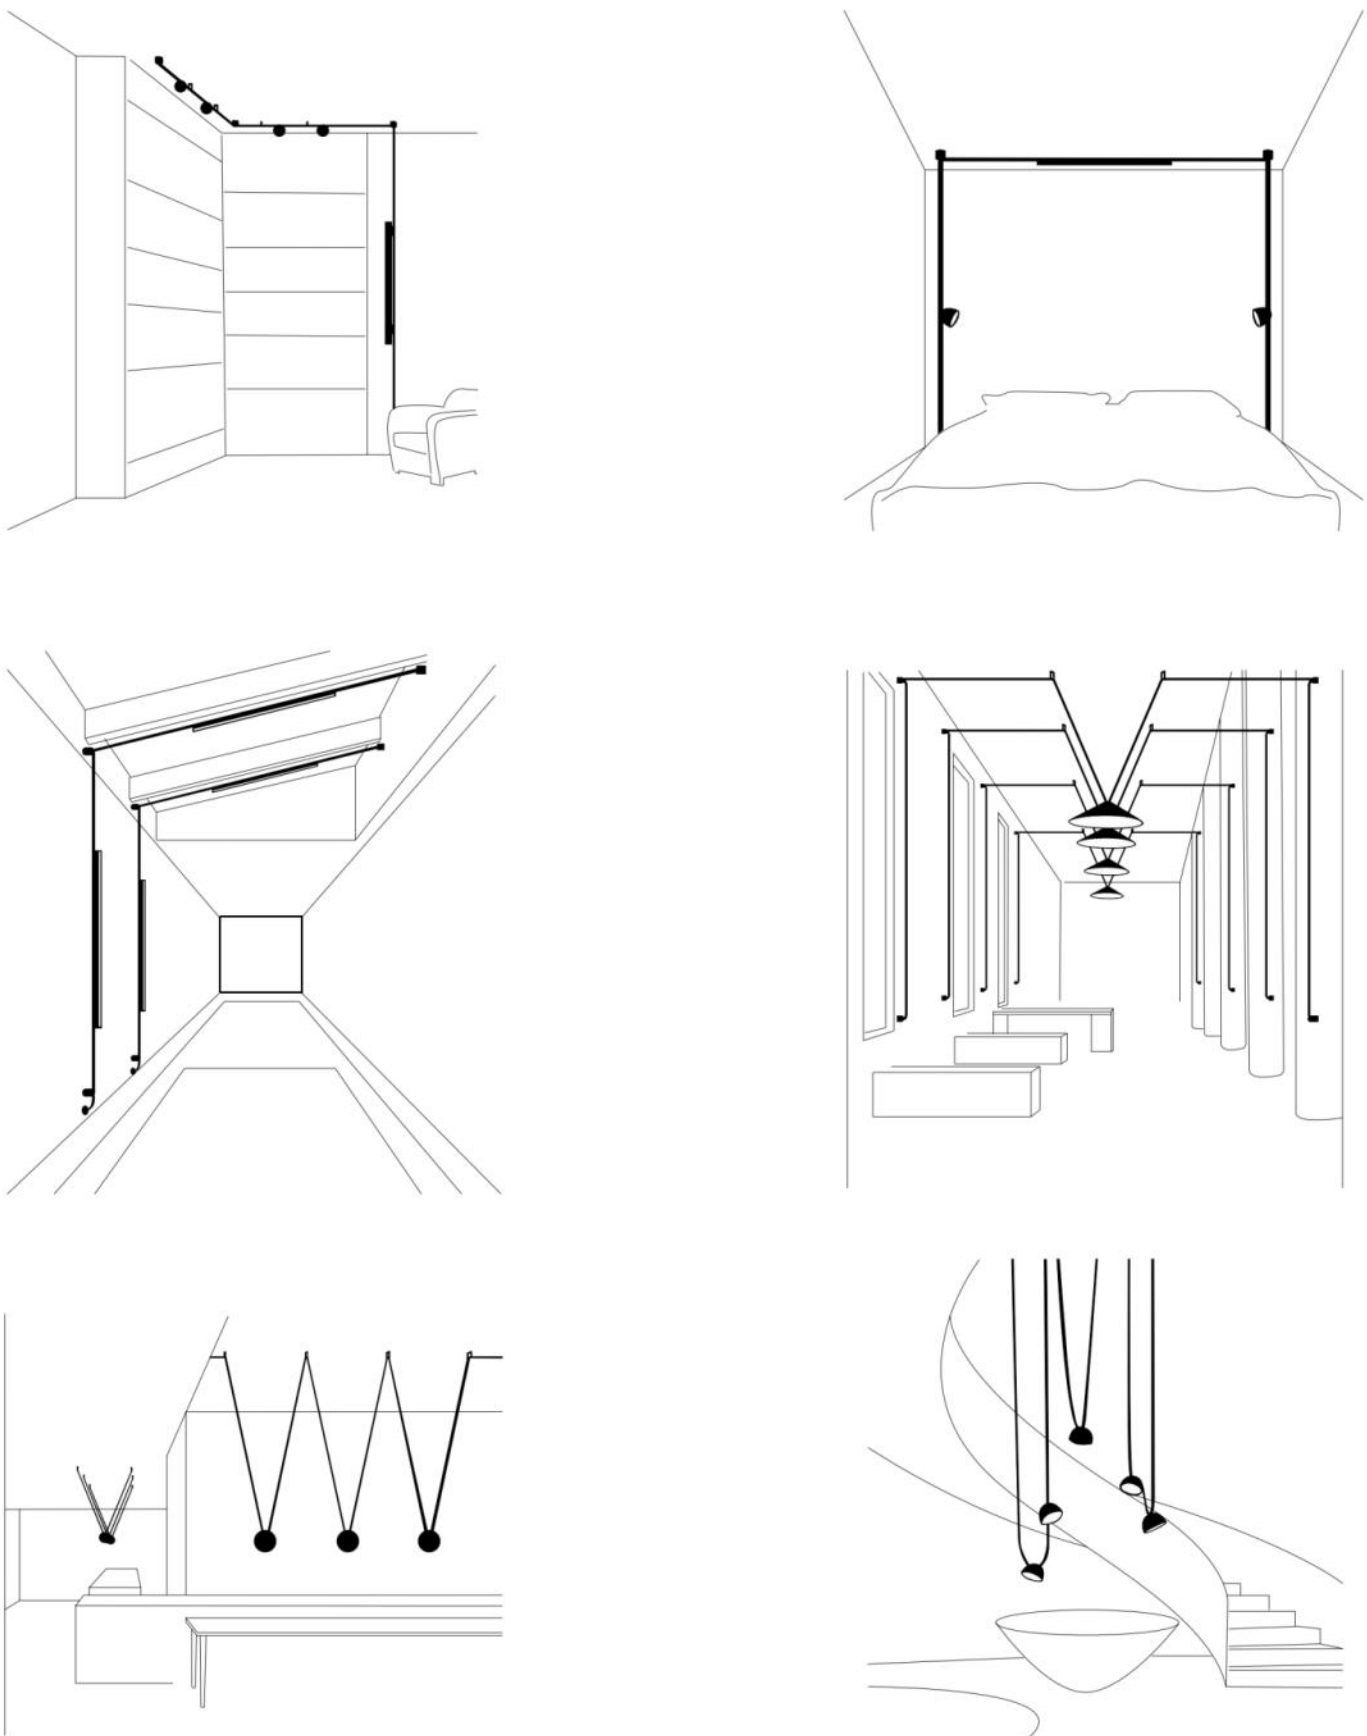


EASY CONNECTION

Each belt, which can be cut as needed, accommodates multiple luminaires and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire.



THERE ARE THREE WAYS TO CONNECT THE POWER SUPPLY

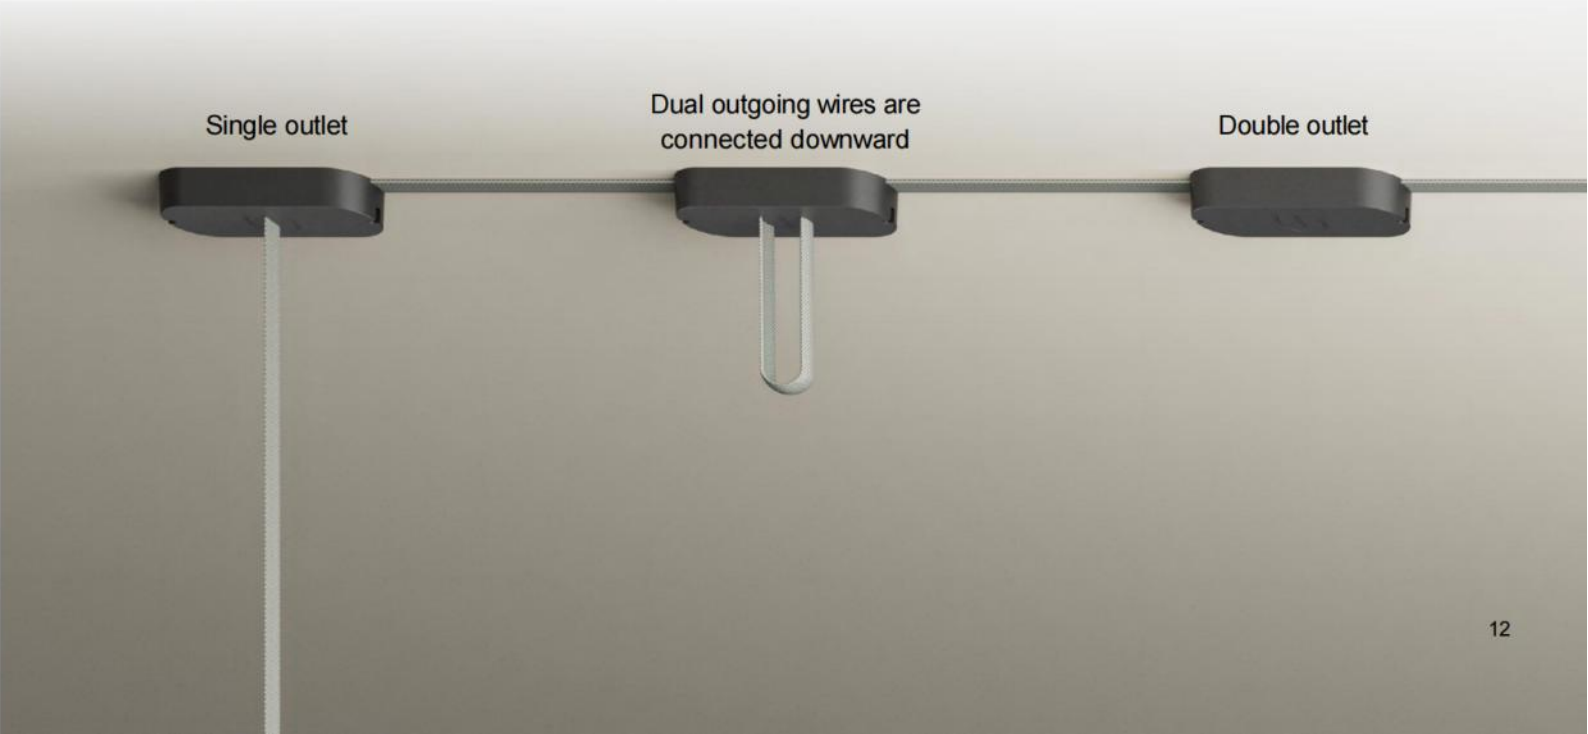


CONDUCTIVE MODULE





Model NO.	OLEO1B-10M / 20M / 30M	OLEO1B-AD1	OLEO1B-AD2
Product Name	BELT	Adapter	Adapter
Material	Copper & Fabric (Terylene)	PC	PC
Size	28.5*2.8mm	38.5*36*10.5mm	44*33*30mm
Description	Voltage DC48V Copper Size:1.36mm²*2 Flexible cutting 10meters/Roll 20meters/Roll 30meters/Roll	transform the lights in ultrathin series to fix proper on the belt	connector for ultrathin track and belt to conduct the electricity

Dimensions(mm)

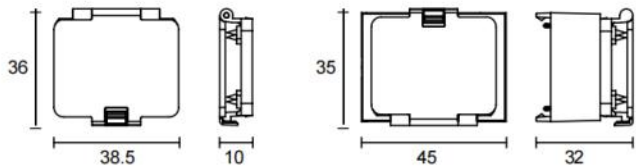



Model NO.	OLEO1B-CAP1	OLEO1B-CAP2
Product Name	End cap	End cap
Material	PC	PC
Size	32*10*7.5mm	34*18*11mm
Description	end cap for single belt	end cap for double belt

Dimensions(mm)





Model NO.	OLEO1B-F01	OLEO1B-F02
Product Name	Fixed Bracket	Fixed Cylinder
Material	PC	PC
Size	50*36.5*7mm	Φ65*45mm
Description	bracket fix on the ceiling to hold the belt	cylinder bracket fix on the ceiling to hold the belt or as a feeder

Dimensions(mm)



Model NO.	OLEO1B-F03	OLEO1B-SP100 / OLEO1B-SP200
Product Name	Fixed Ring-Recessed	Power Supply
Material	PC	PC
Size	Φ86*40mm	250*90*45mm
Description	recessed ring fixed on the ceiling to hold the belt or as a feeder; Cut out size:Φ75mm	Power:100w/200w Input Voltage:220Vac Output Voltage:DC48V Current:2.1A/4.2A

Dimensions(mm)

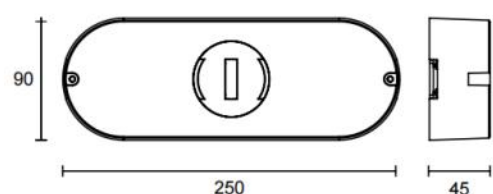
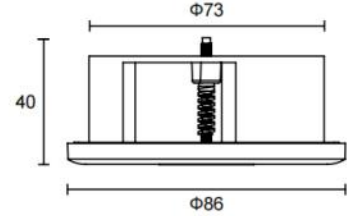


PRODUCT INFORMATION





Model NO.	OLEO1B-HB200	OLEO1B-HB150	OLEO1B-G100
Power	7W	7W	4W
CCT	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V	DC48V
CRI	>90	>90	>90
Beam Angle	120°	120°	120°
Material	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass
Color	Black	Black	Black
Life	30 000H	30 000H	30 000H
Warranty	3-5 Years	3-5 Years	3-5 Years

Dimensions(mm)





Model NO.	OLEO1B-HR200	OLEO1B-HT600
Power	12W	20W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	120°	120°
Material	Aluminum	Aluminum
Color	Black	Black
Life	30 000H	30 000H
Warranty	3-5 Years	3-5 Years

Dimensions(mm)

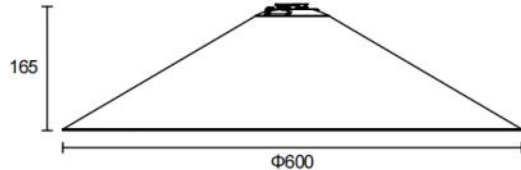

Model NO.	OLEO1B-LB10	OLEO1B-LB15
Power	20W	30W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	30°	30°
Material	Aluminum	Aluminum
Color	Black	Black
Life	30 000H	30 000H
Warranty	3-5 Years	3-5 Years

Dimensions(mm)



Model NO.	OLEO1B-DF265	OLEO1B-DF530
Power	12W	24W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	105°	105°
Material	Aluminum	Aluminum
Color	Black	Black
Life	30 000H	30 000H
Warranty	3-5 Years	3-5 Years

Dimensions(mm)

