


Ultra
thin magnetic
track light **OLE03**



USA & CA STANDARD



OLEO3 track light system redefines interior design. It's adaptability and effortless setup infuse every space with contemporary charm. An essential tool for crafting captivating lighting designs. The easy installation and sleek design save time and elevate any space.

LED MAGNETIC
LIGHT SERIES


OLEO3 SERIES

Magnetic track





DECORATIVE COVER PLATE

CX23M08 20X465mm



SURFACE MOUNTED TRACK 1

OLEO3-M01M1000	39.37in
OLEO3-M01M2000	78.74in
OLEO3-M01M3000	118.11in




SURFACE MOUNTED TRACK 2

OLEO3-M02M1000	39.37in
OLEO3-M02M2000	78.74in
OLEO3-M02M3000	118.11in

Track installation display


Surface Mounted Track installation




OLE03 SERIES

Track connectors


SURFACE MOUNTED TRACK

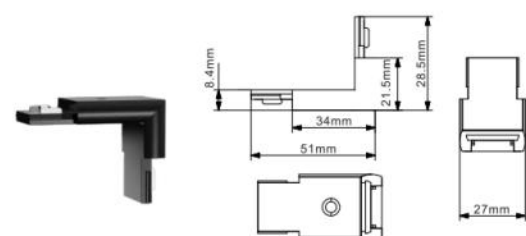


IN corner module

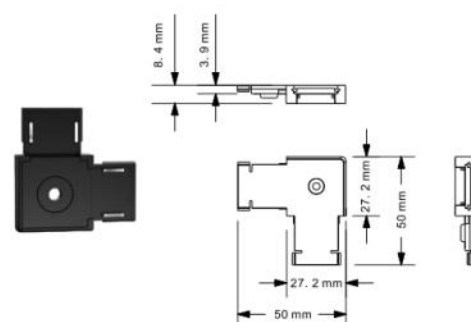


Corner module

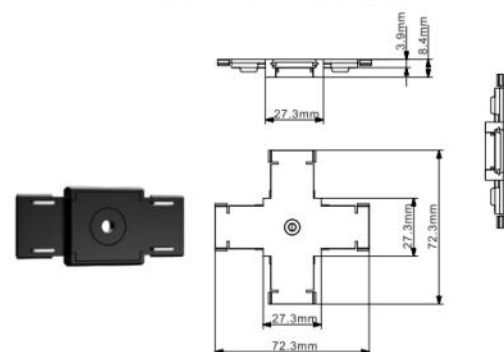


Pass-through module

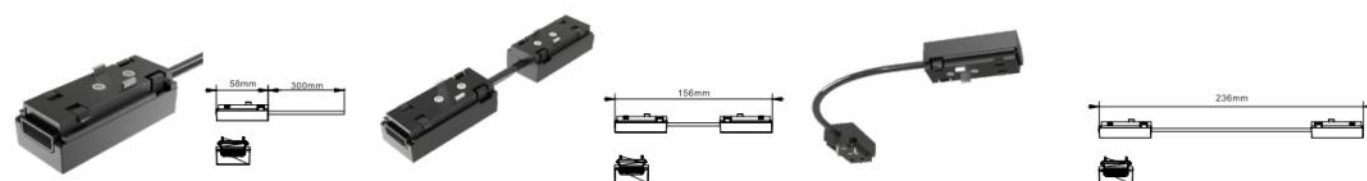


Output module

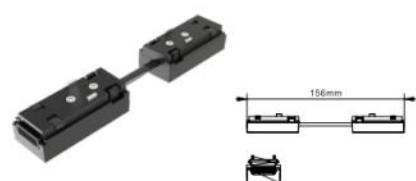


Straight output module

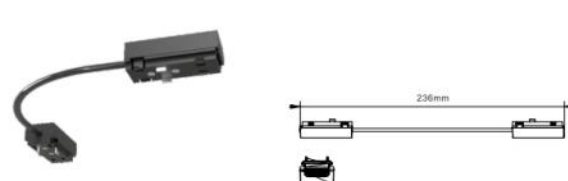


Corner output module

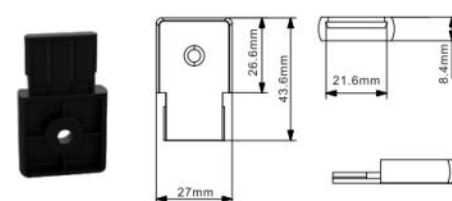

Rail plug fixing parts

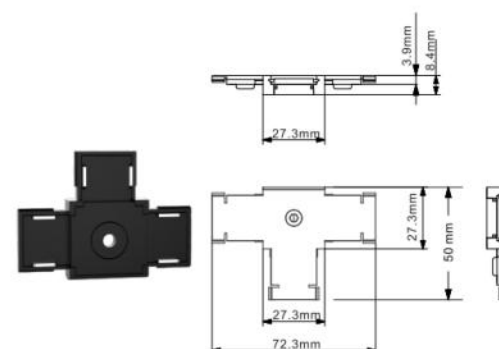

Three direction module

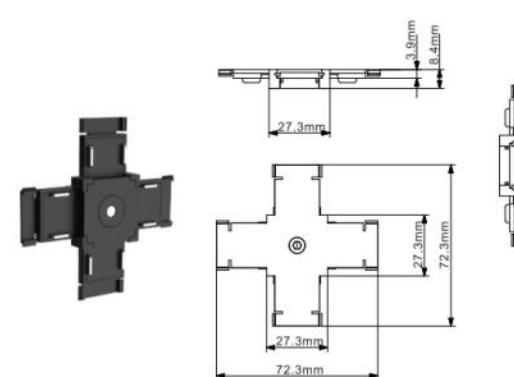

Four direction module

OLE03 SERIES



Power supply



PRODUCT PARAMETERS


MODEL NO	Watt	Input Voltage	Output Voltage	Size (MM)	Finish
OLE03-M100-B	100W	90-120V	24V	153*37.7*60	Black

PRODUCT DIMENSION

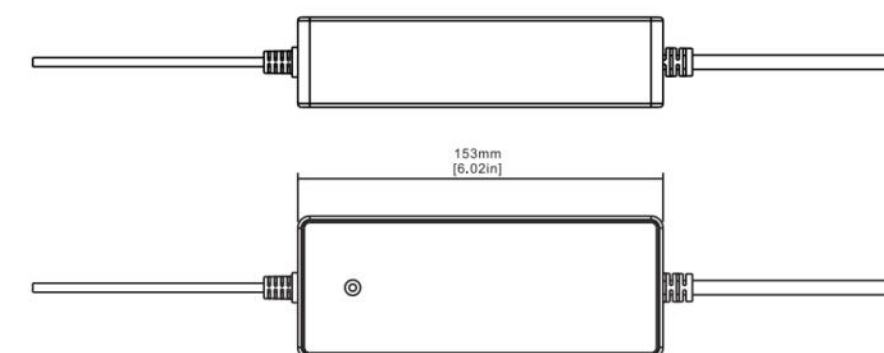

OLE03 SERIES

Diffuser linear light

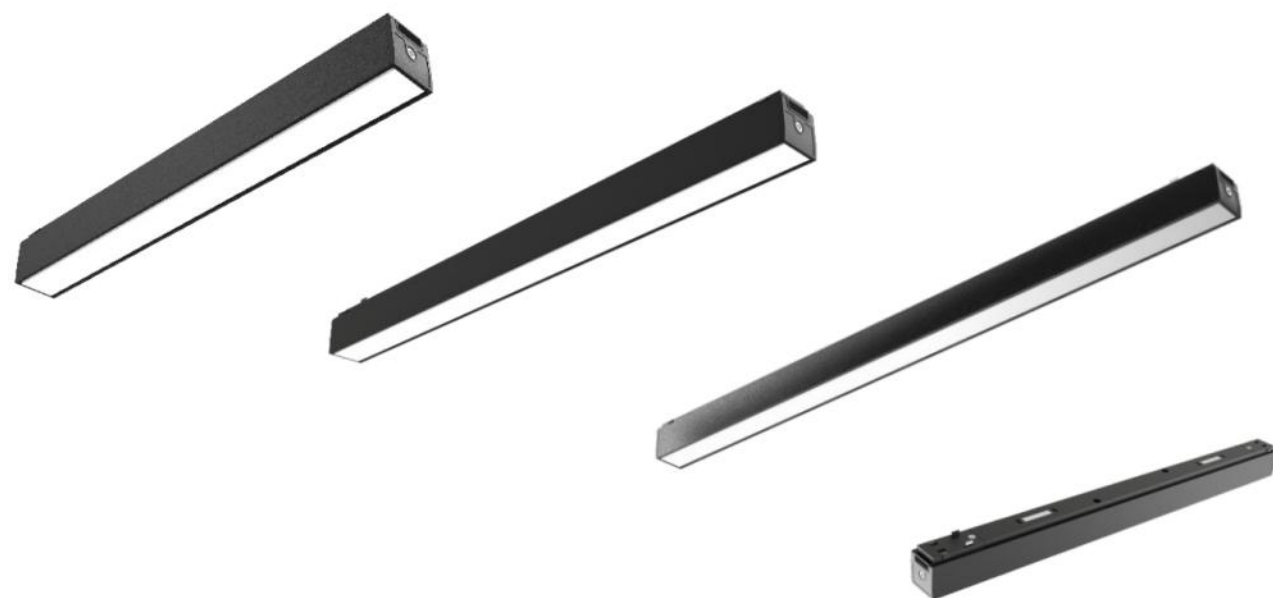


PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-A12S	12W	Ra90	24V	3000K/4000K/5000K	120°	600Lm
OLE03-A18S	18W	Ra90	24V	3000K/4000K/5000K	120°	900Lm
OLE03-A24S	24W	Ra90	24V	3000K/4000K/5000K	120°	1200Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

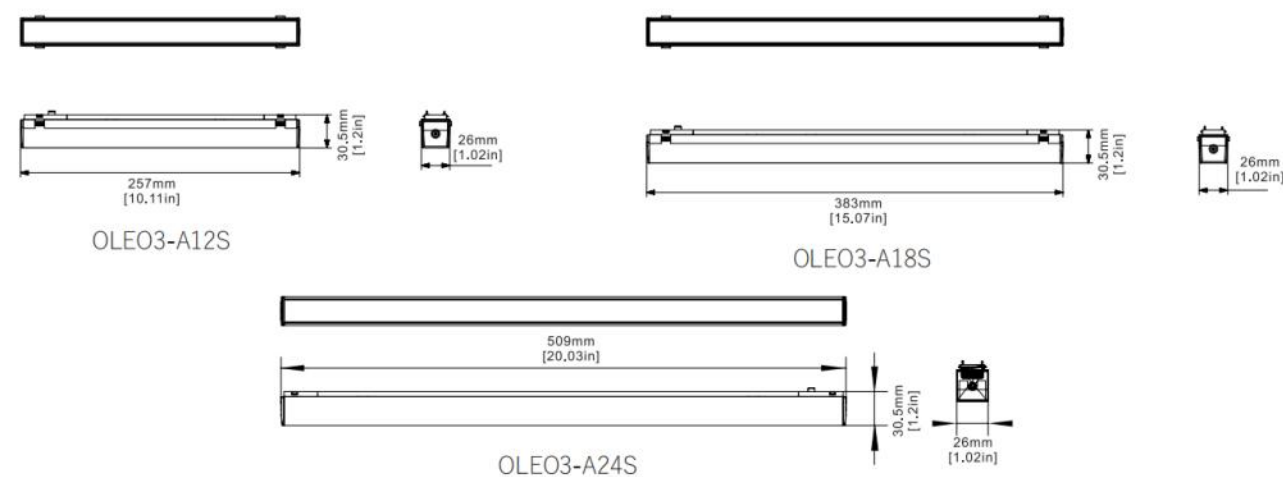

OLE03 SERIES

Grille light




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-A06A	6W	Ra90	24V	3000K/4000K/5000K	24°/36°	420Lm
OLE03-A12A	12W	Ra90	24V	3000K/4000K/5000K	24°/36°	840Lm
OLE03-A18A	18W	Ra90	24V	3000K/4000K/5000K	24°/36°	1260Lm
OLE03-A24A	24W	Ra90	24V	3000K/4000K/5000K	24°/36°	1680Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

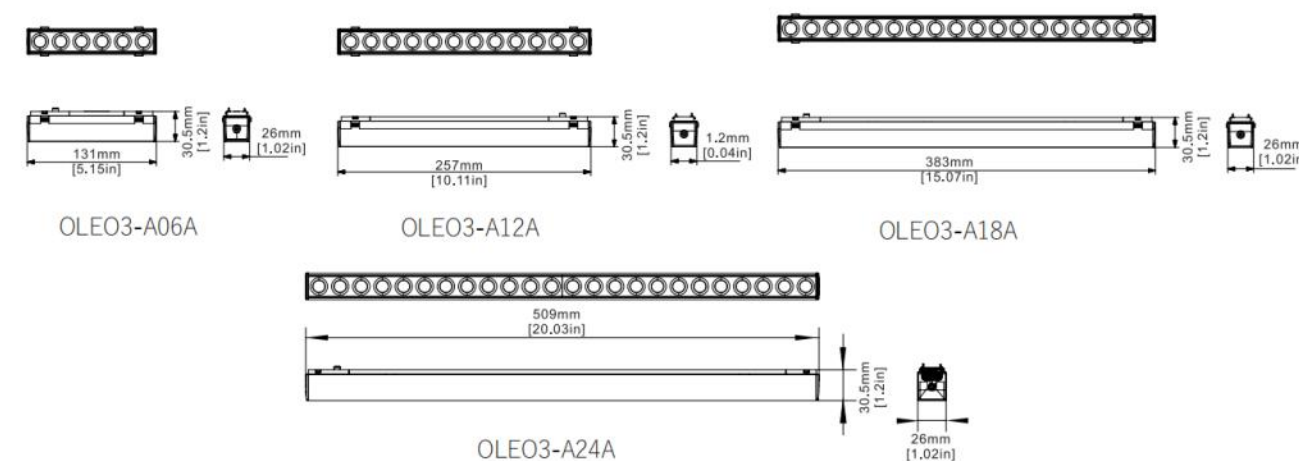

OLE03 SERIES

Folding diffuser linear light 2




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-A06T	6W	Ra90	24V	3000K/4000K/5000K	120°	300Lm
OLE03-A12T	12W	Ra90	24V	3000K/4000K/5000K	120°	600Lm
OLE03-A18T	18W	Ra90	24V	3000K/4000K/5000K	120°	900Lm


Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

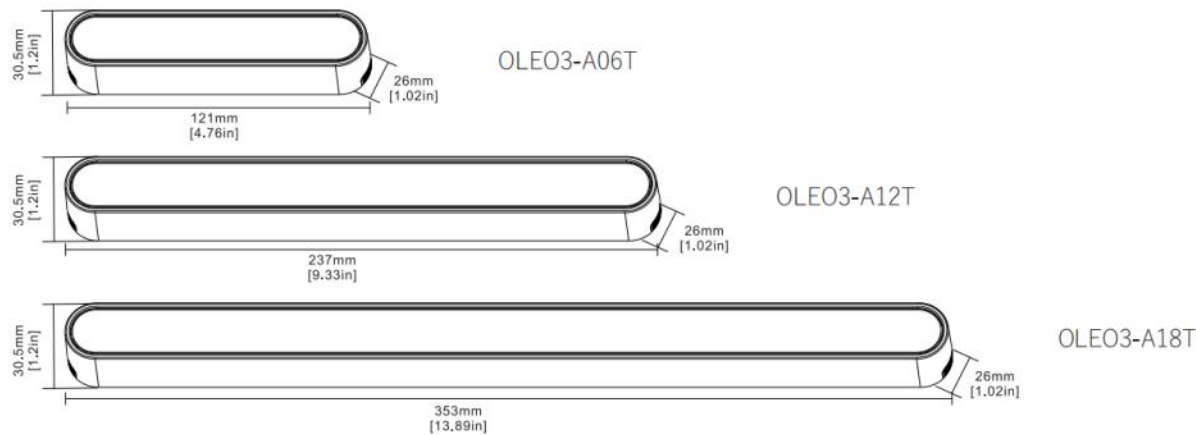

OLE03 SERIES

Folding grille light 1

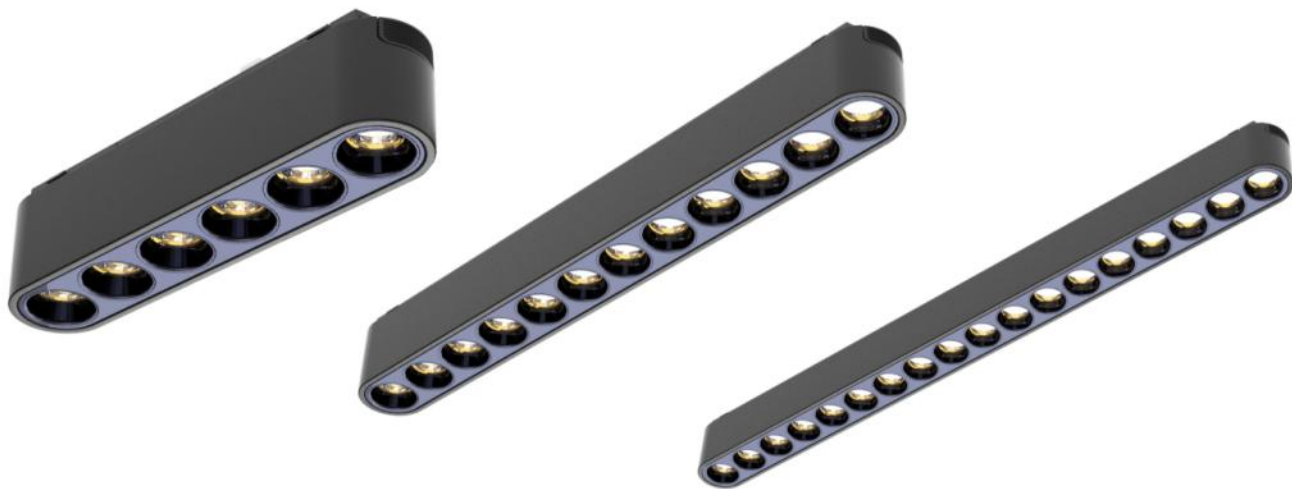


PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-B06B	6W	Ra90	24V	3000K/4000K/5000K	24°/36°	420Lm
OLE03-B12B	12W	Ra90	24V	3000K/4000K/5000K	24°/36°	840Lm
OLE03-B18B	18W	Ra90	24V	3000K/4000K/5000K	24°/36°	1260Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

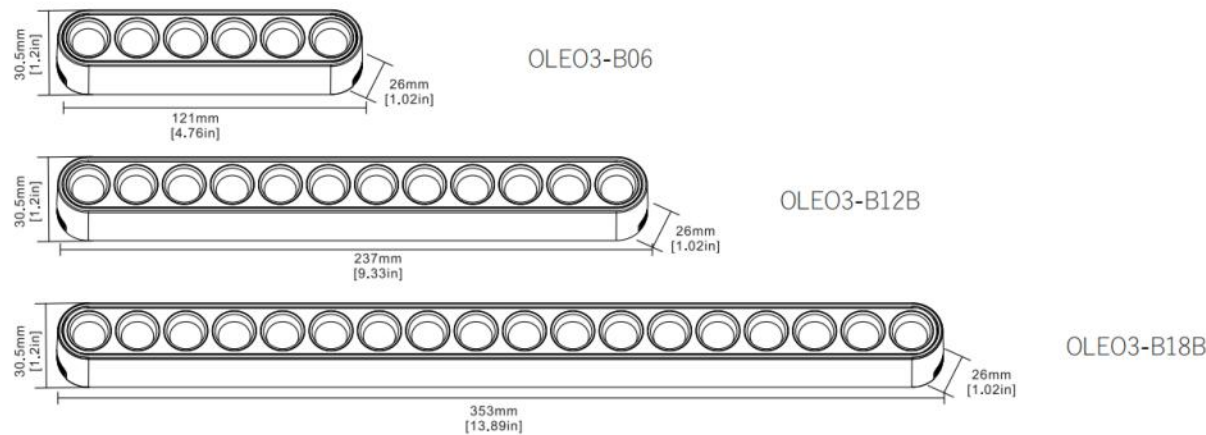

OLEO3 SERIES

Diffuser linear light




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLEO3-B12S	12W	Ra90	24V	3000K/4000K/5000K	120°	600Lm
OLEO3-B18S	18W	Ra90	24V	3000K/4000K/5000K	120°	900Lm


Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

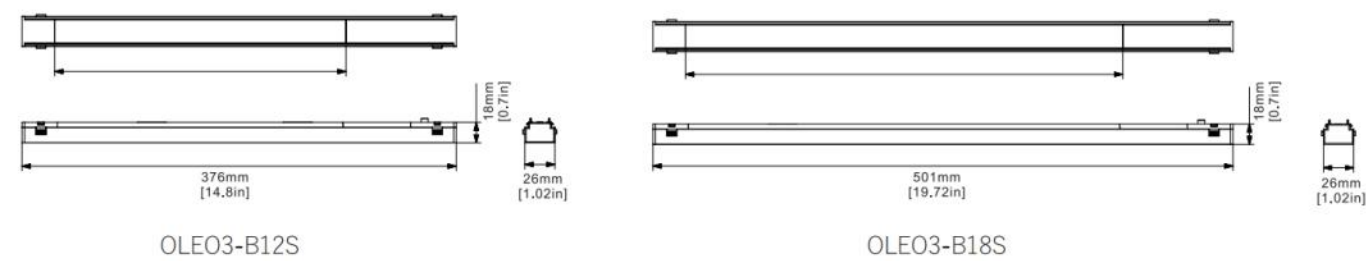

OLEO3 SERIES

Grille light




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLEO3-B12A	12W	Ra90	24V	3000K/4000K/5000K	24°/36°	420Lm
OLEO3-B18A	18W	Ra90	24V	3000K/4000K/5000K	24°/36°	840Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

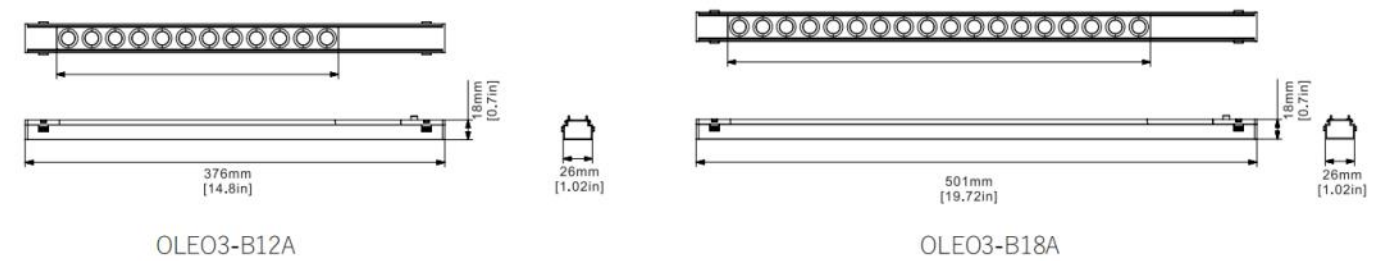

OLE03 SERIES

Folding grille light




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-D06A	6W	Ra90	24V	3000K/4000K/5000K	15°/24°/36°	420Lm
OLE03-D12A	12W	Ra90	24V	3000K/4000K/5000K	15°/24°/36°	840Lm
OLE03-D18A	18W	Ra90	24V	3000K/4000K/5000K	15°/24°/36°	1260Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

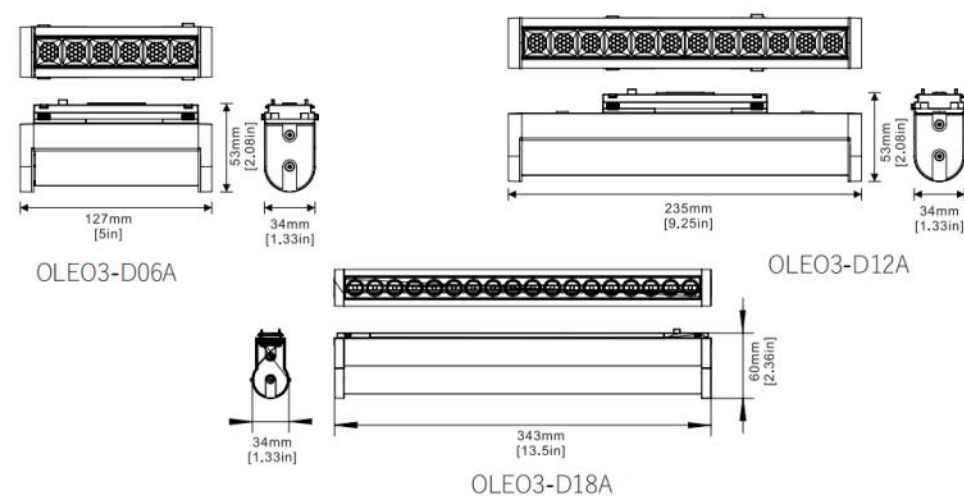

OLE03 SERIES

Folding grille light




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-E06A	6W	Ra90	24V	3000K/4000K/5000K	24°/36°	420Lm
OLE03-E12A	12W	Ra90	24V	3000K/4000K/5000K	24°/36°	840Lm

Lifetime: 50,000 hours
Finish: White/ black


PRODUCT DIMENSION

Unit(in)

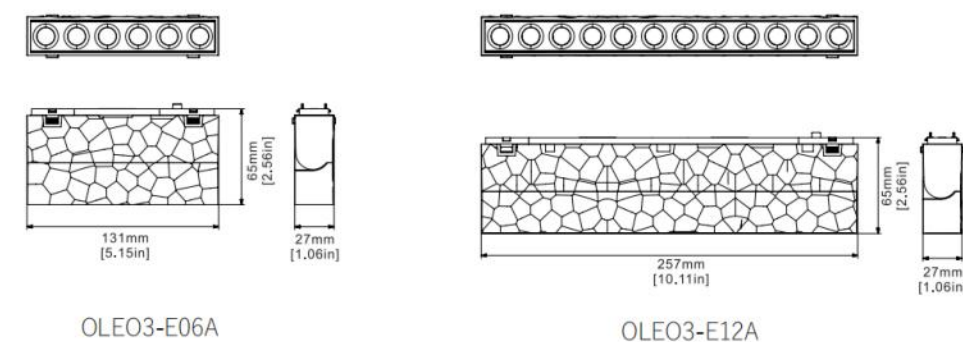

OLE03 SERIES

Track light




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-C10C	10W	Ra90	24V	3000K/4000K/5000K	24°/36°	900Lm
OLE03-C12C	12W	Ra90	24V	3000K/4000K/5000K	24°/36°	1080Lm
OLE03-C26C	24W	Ra90	24V	3000K/4000K/5000K	24°/36°	2160Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

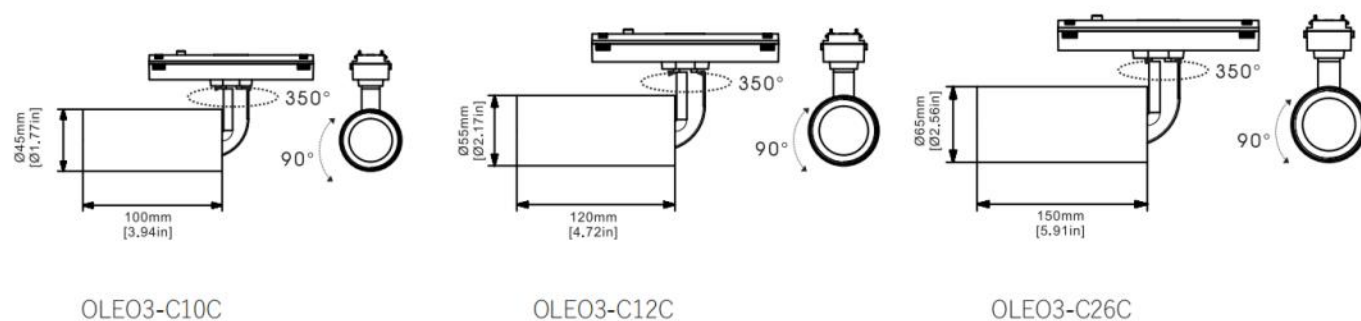

OLE03-C10C

OLE03-C12C

OLE03-C26C

OLE03 SERIES

Track light




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-P20C	16W	Ra90	24V	3000K/4000K/5000K	15°-45°	1368Lm
OLE03-P20CT	16W	Ra90	24V	3000K/4000K/5000K	15°/24°/36°	1368Lm
OLE03-P20CS	16W	Ra90	24V	3000K/4000K/5000K	90°	1368Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

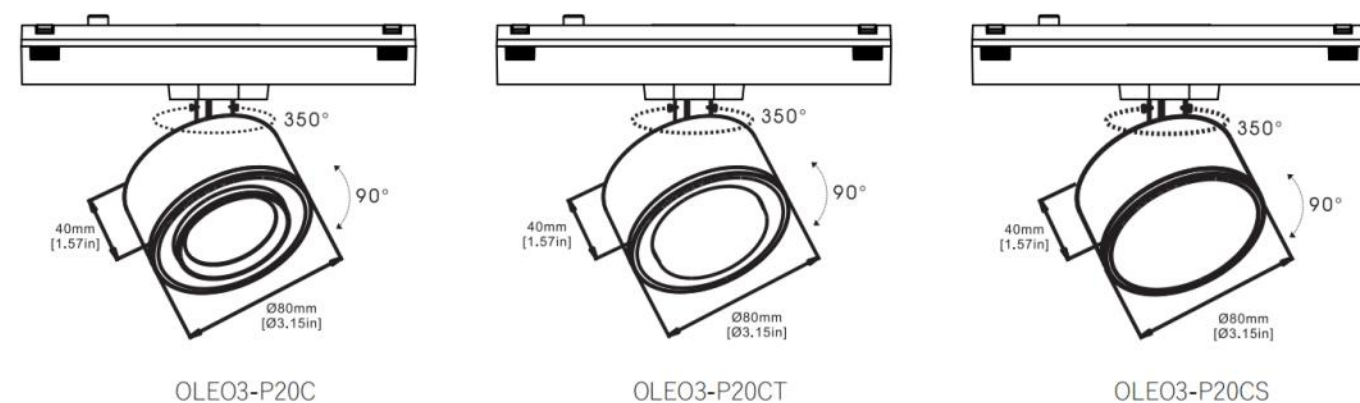


OLE03-P20C

OLE03-P20CT

OLE03-P20CS

OLE03 SERIES

Track light




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-D12C	12W	Ra90	24V	3000K/4000K/5000K	15°/24°/38°/45°/60°	1140Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

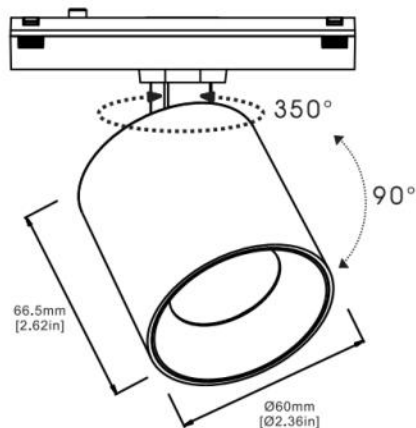

OLE03 SERIES

Track light




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-E16B-1	16W	Ra90	24V	3000K/4000K/5000K	36°	1120Lm
OLE03-E24B	24W	Ra90	24V	3000K/4000K/5000K	24°/36°	1680Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

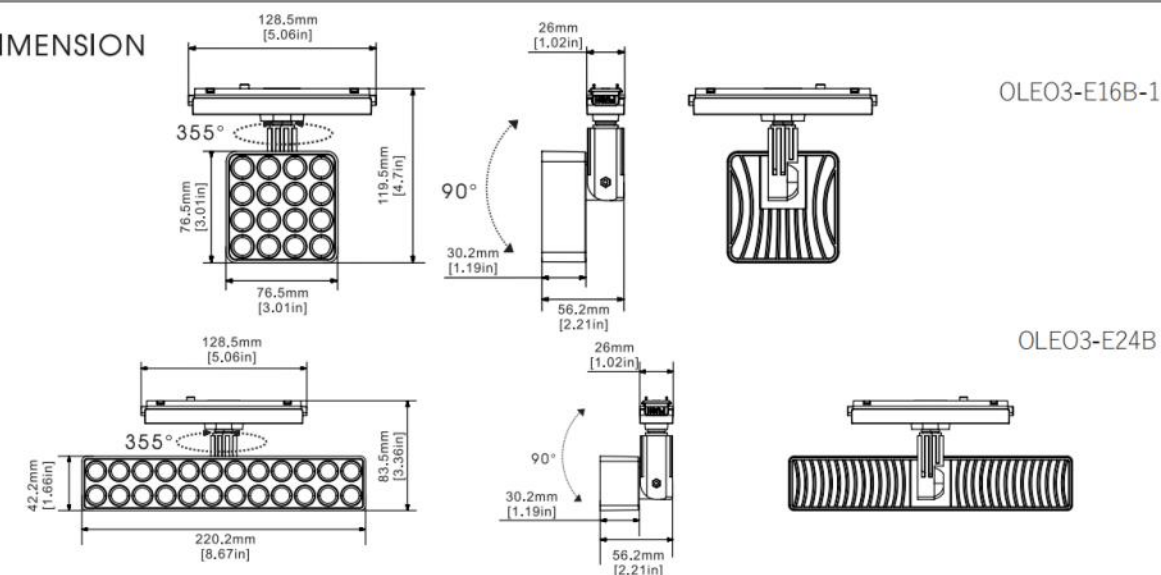

OLE03 SERIES

Wall light




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-E16B	16W	Ra90	24V	3000K/4000K/5000K	36°	1120Lm
OLE03-E16S	16W	Ra90	24V	3000K/4000K/5000K	90°	1120Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIEMENSION

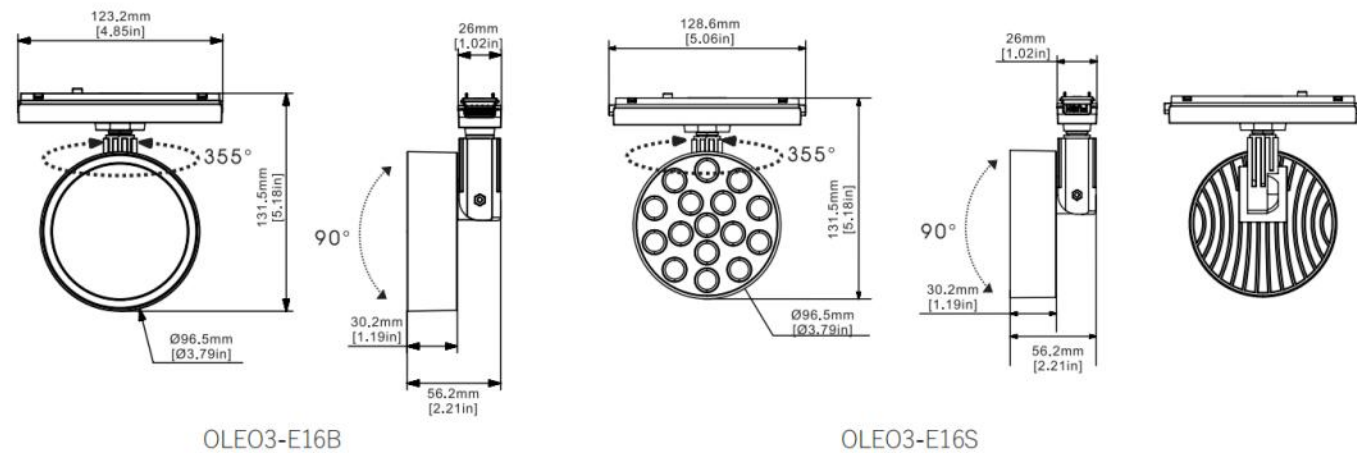

OLE03 SERIES

Down light



OLE03-E08B


OLE03-E08C

PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-E08B	8W	Ra90	24V	3000K/4000K/5000K	24°/36°	560Lm
OLE03-E08C	8W	Ra90	24V	3000K/4000K/5000K	24°/36°	560Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIEMENSION

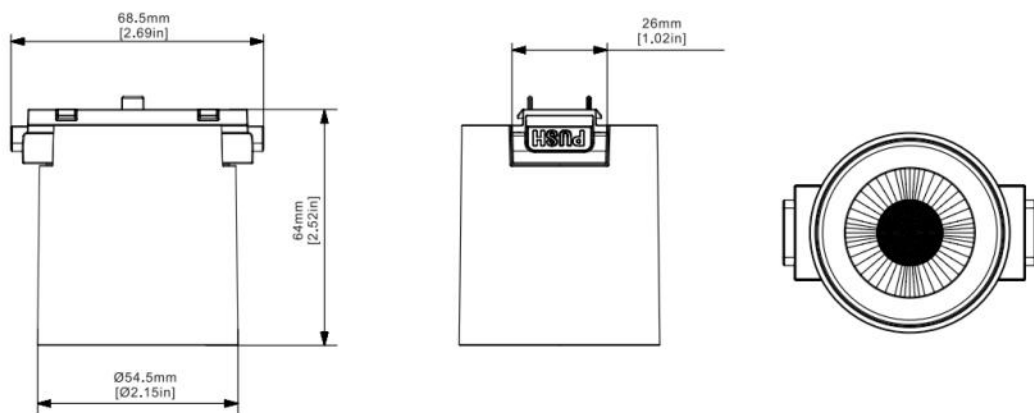

OLE03 SERIES

Hanging light 1




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	Lumens
OLE03-G12C	12W	Ra90	24V	3000K/4000K/5000K	24°/36°	1080Lm
OLE03-N10C	10W	Ra90	24V	3000K/4000K/5000K	75°	750Lm

Lifetime: 50,000 hours
Finish: White/ black

PRODUCT DIMENSION

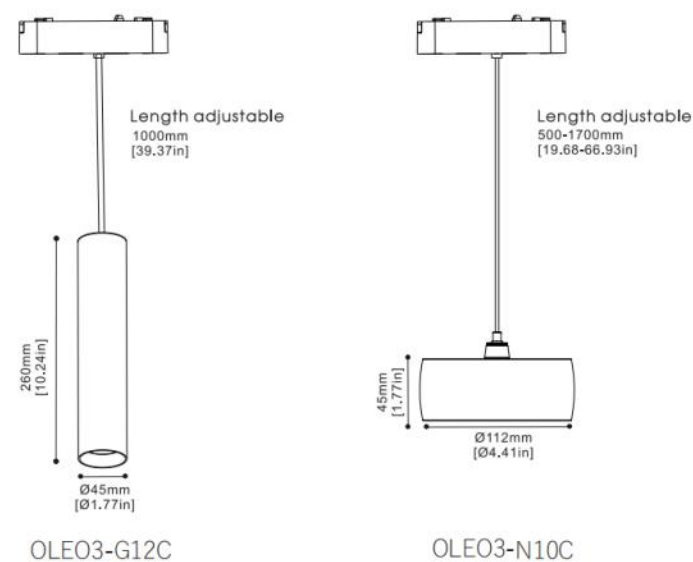

OLE03 SERIES

Hanging light 2




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	Lumens
OLE03-E06Z	6W	Ra90	24V	3000K/4000K/5000K	360Lm
OLE03-E10Z	10W	Ra90	24V	3000K/4000K/5000K	600Lm
OLE03-E16Z	16W	Ra90	24V	3000K/4000K/5000K	960Lm

Lifetime: 50,000 hours
Finish: White/ black


PRODUCT DIMENSION

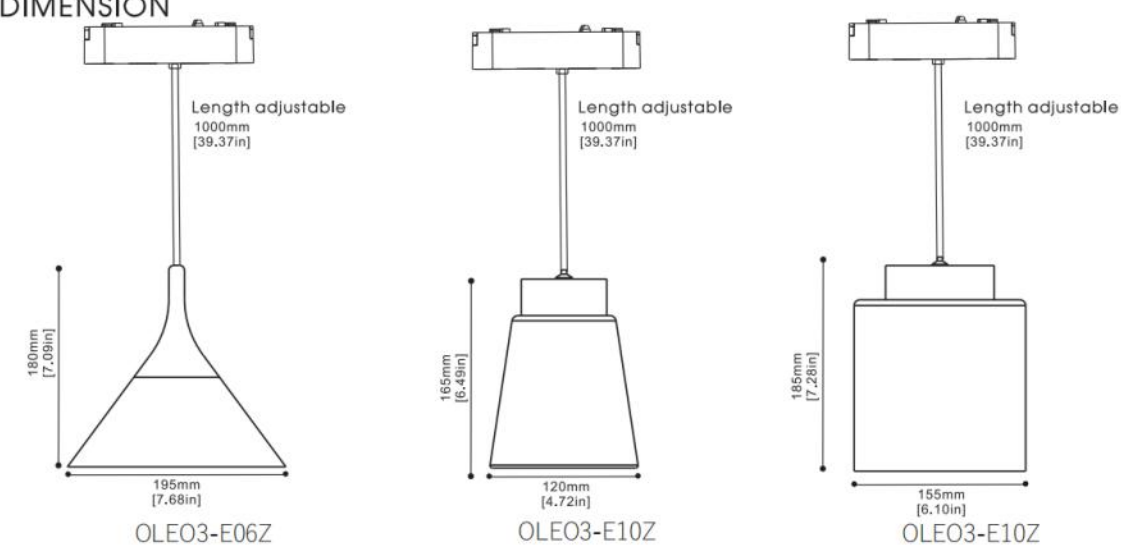

OLE03-D SERIES

Dimmable system

24V

10%-100%
Dimmable


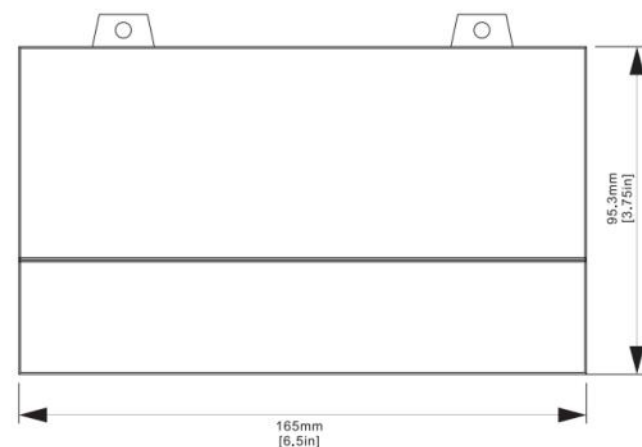
PRODUCT PARAMETERS

MODEL NO	Watt	Input Voltage	Output Voltage	Size (MM)	Finish
OLE03-M100-A	100W	120-277V	24V	165*40*95.3	Black

Triac/0-10V/Dimmable

PRODUCT DIMENSION

Unit(mm)




Magnetic track

24V

10%-100%
Dimmable


DECORATIVE COVER PLATE

CX23M08 20X465mm

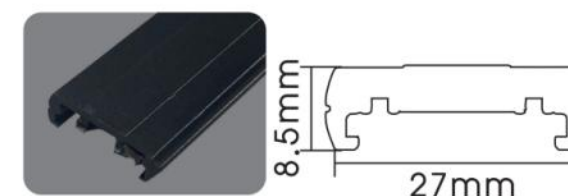

SURFACE MOUNTED TRACK 1

OLE03-M01M1000	39.37in
OLE03-M01M2000	78.74in
OLE03-M01M3000	118.11in

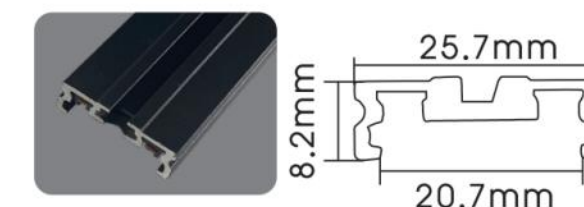


SURFACE MOUNTED TRACK 2

OLE03-M02M1000	39.37in
OLE03-M02M2000	78.74in
OLE03-M02M3000	118.11in

Track installation display


Surface Mounted Track installation




OLE03-D SERIES

Dimmable system


24V

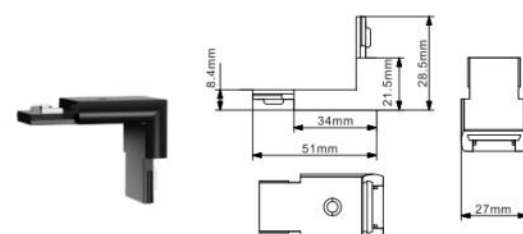10%-100%
Dimmable


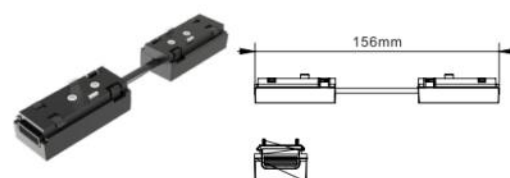
IN corner module

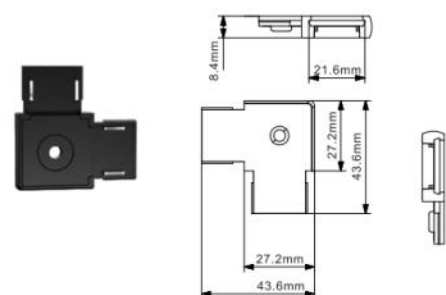

Corner module

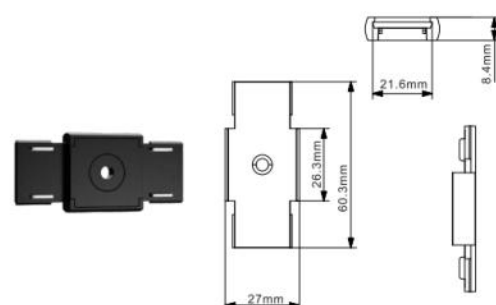


Pass-through module




Straight output module




Recessed junction box

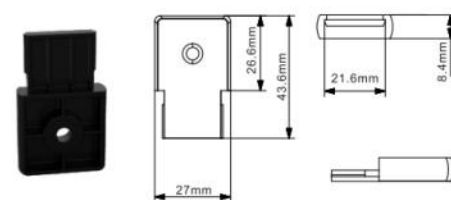


Rail plug fixing parts

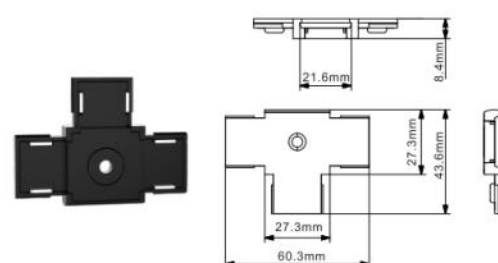


Three direction module

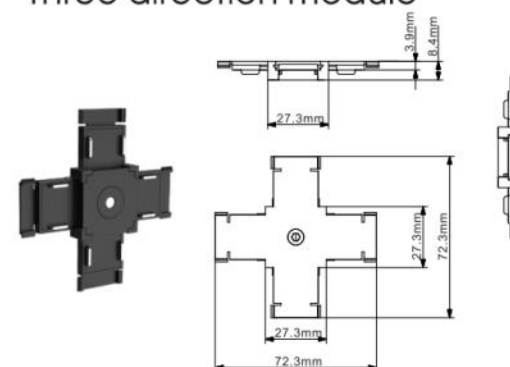

Four direction module

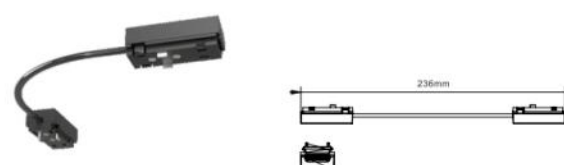


Corner output module

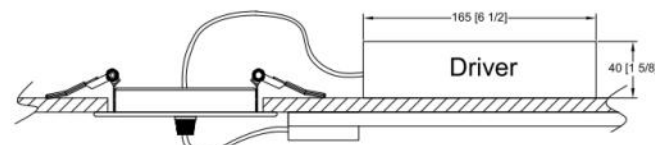

OLE03-D SERIES

Dimmable system

24V

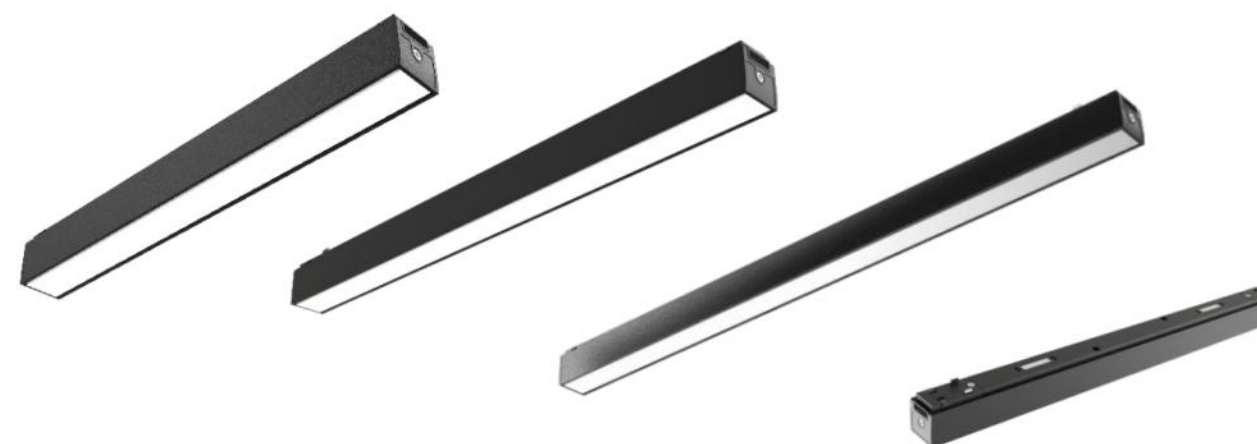10%-100%
Dimmable


PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-A12S-D	12W	Ra90	24V	2CCT tunable	120°	Yes	680Lm
OLE03-A18S-D	18W	Ra90	24V	2CCT tunable	120°	Yes	970Lm
OLE03-A24S-D	24W	Ra90	24V	2CCT tunable	120°	Yes	1300Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K



PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-A06T-D	6W	Ra90	24V	2CCT tunable	120°	Yes	300Lm
OLE03-A12T-D	12W	Ra90	24V	2CCT tunable	120°	Yes	600Lm
OLE03-A18T-D	18W	Ra90	24V	2CCT tunable	120°	Yes	900Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K

OLE03-D SERIES

Dimmable system



PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-B12S-D	12W	Ra90	24V	2CCT tunable	120°	Yes	650Lm
OLE03-B18S-D	18W	Ra90	24V	2CCT tunable	120°	Yes	940Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K



PRODUCT PARAMETERS


MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-A06A-D	6W	Ra90	24V	2CCT tunable	24°/36°	Yes	460Lm
OLE03-A12A-D	12W	Ra90	24V	2CCT tunable	24°/36°	Yes	930Lm
OLE03-A18A-D	18W	Ra90	24V	2CCT tunable	24°/36°	Yes	1300Lm
OLE03-A24A-D	24W	Ra90	24V	2CCT tunable	24°/36°	Yes	1680Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K

OLE03-D SERIES

Dimmable system

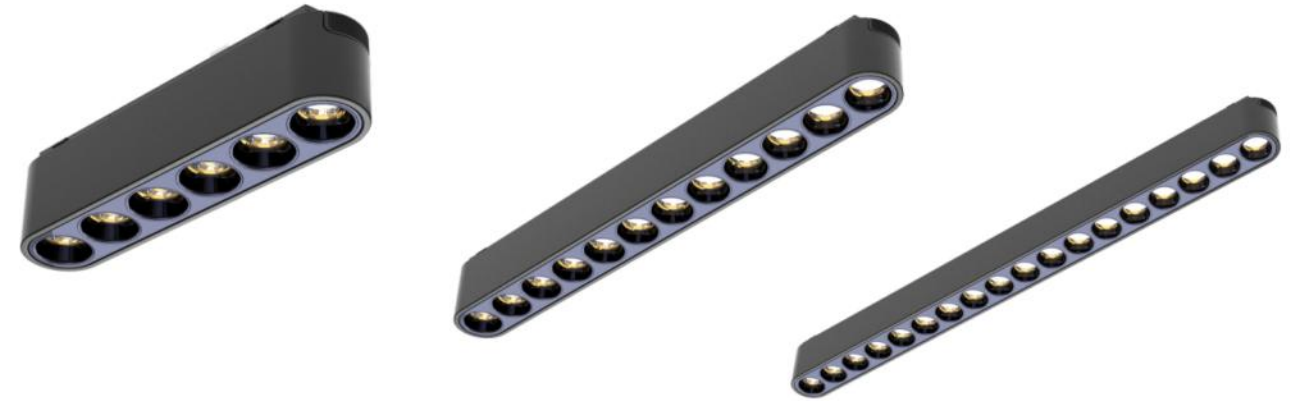

PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-B06B-D	6W	Ra90	24V	2CCT tunable	24°/36°	Yes	420Lm
OLE03-B12B-D	12W	Ra90	24V	2CCT tunable	24°/36°	Yes	840Lm
OLE03-B18B-D	18W	Ra90	24V	2CCT tunable	24°/36°	Yes	1260Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K



PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-B12A-D	12W	Ra90	24V	2CCT tunable	24°/36°	Yes	910Lm
OLE03-B18A-D	18W	Ra90	24V	2CCT tunable	24°/36°	Yes	1300Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K

OLE03-D SERIES

Dimmable system




PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-D06A-D	6W	Ra90	24V	2CCT tunable	15°/24°/36°	Yes	380Lm
OLE03-D12A-D	12W	Ra90	24V	2CCT tunable	15°/24°/36°	Yes	850Lm
OLE03-D18A-D	18W	Ra90	24V	2CCT tunable	15°/24°/36°	Yes	1150Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K

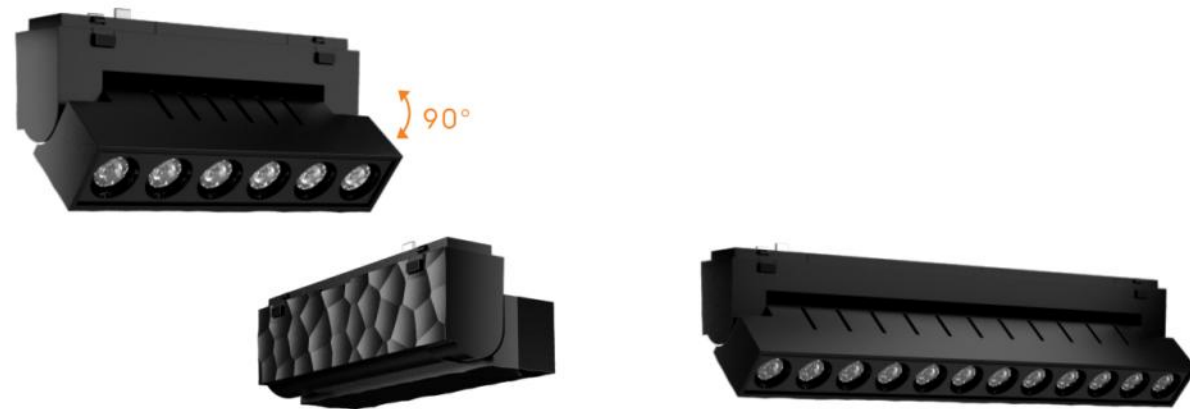

PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-E06A-D	6W	Ra90	24V	2CCT tunable	24°/36°	Yes	420Lm
OLE03-E12A-D	12W	Ra90	24V	2CCT tunable	24°/36°	Yes	840Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K

OLE03-D SERIES

Dimmable system



PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-E16B-D	16W	Ra90	24V	2CCT tunable	36°	Yes	1120Lm
OLE03-E16S-D	16W	Ra90	24V	2CCT tunable	90°	Yes	1120Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K



PRODUCT PARAMETERS


MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-E16B-1D	16W	Ra90	24V	2CCT tunable	36°	Yes	1120Lm
OLE03-E24B-D	24W	Ra90	24V	2CCT tunable	24°/36°	Yes	1680Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K

OLE03-D SERIES

Dimmable system



PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-C10C-D	9W	Ra90	24V	2CCT tunable	24°/36°	Yes	900Lm
OLE03-C12C-D	12W	Ra90	24V	2CCT tunable	24°/36°	Yes	1080Lm
OLE03-C26C-D	18W	Ra90	24V	2CCT tunable	24°/36°	Yes	2160Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K



OLE03-E08B-D

OLE03-E08C-D

PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-E08B-D	6W	Ra90	24V	2CCT tunable	24°/36°	Yes	560Lm
OLE03-E08C-D	6W	Ra90	24V	2CCT tunable	24°/36°	Yes	560Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K

OLE03-D SERIES

Dimmable system



PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	BEAM ANGLE	DIMMABLE	Lumens
OLE03-G12C-D	9W	Ra90	24V	2CCT tunable	24°/36°	Yes	1080Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K



PRODUCT PARAMETERS

MODEL NO	Watt	CRI	Voltage	CCT	DIMMABLE	Lumens
OLE03-E06Z-D	6W	Ra90	48V	2CCT tunable	Yes	360Lm
OLE03-E10Z-D	10W	Ra90	48V	2CCT tunable	Yes	600Lm
OLE03-E16Z-D	15W	Ra90	48V	2CCT tunable	Yes	960Lm

Lifetime: 50,000 hours
Finish: White/ black

*2CCT tunable : 3000K/4000K



T:0086-20-37716973

C:0086-15920570517 (WeChat/Whatsapp)

www.Oleder-lux.com

Add:Room 335,Building 2, #1 Xianke 1st Rd,
Honglitronic Group,Huadu ,510890,Guangzhou,P.R.C.

LIGHTING: DESIGN | MANUFACTURE | SOLUTION