



CHANDELIER-TRACK OLEO4 SERIES

OLEDER LIGHTING CO.,LIMITED

Tel : 86-20-37716973


Cell : 0086-15920570517

Emial : oleever@oleder-lighting.com
r.oyoung@oleder-lighting.com

Web: www.oleder-lux.com

Add.: Room 335,Building 2, #1 Xianke 1st Rd, Honglitrionic Group,Huadu ,510890,Guangzhou,P.R.C.



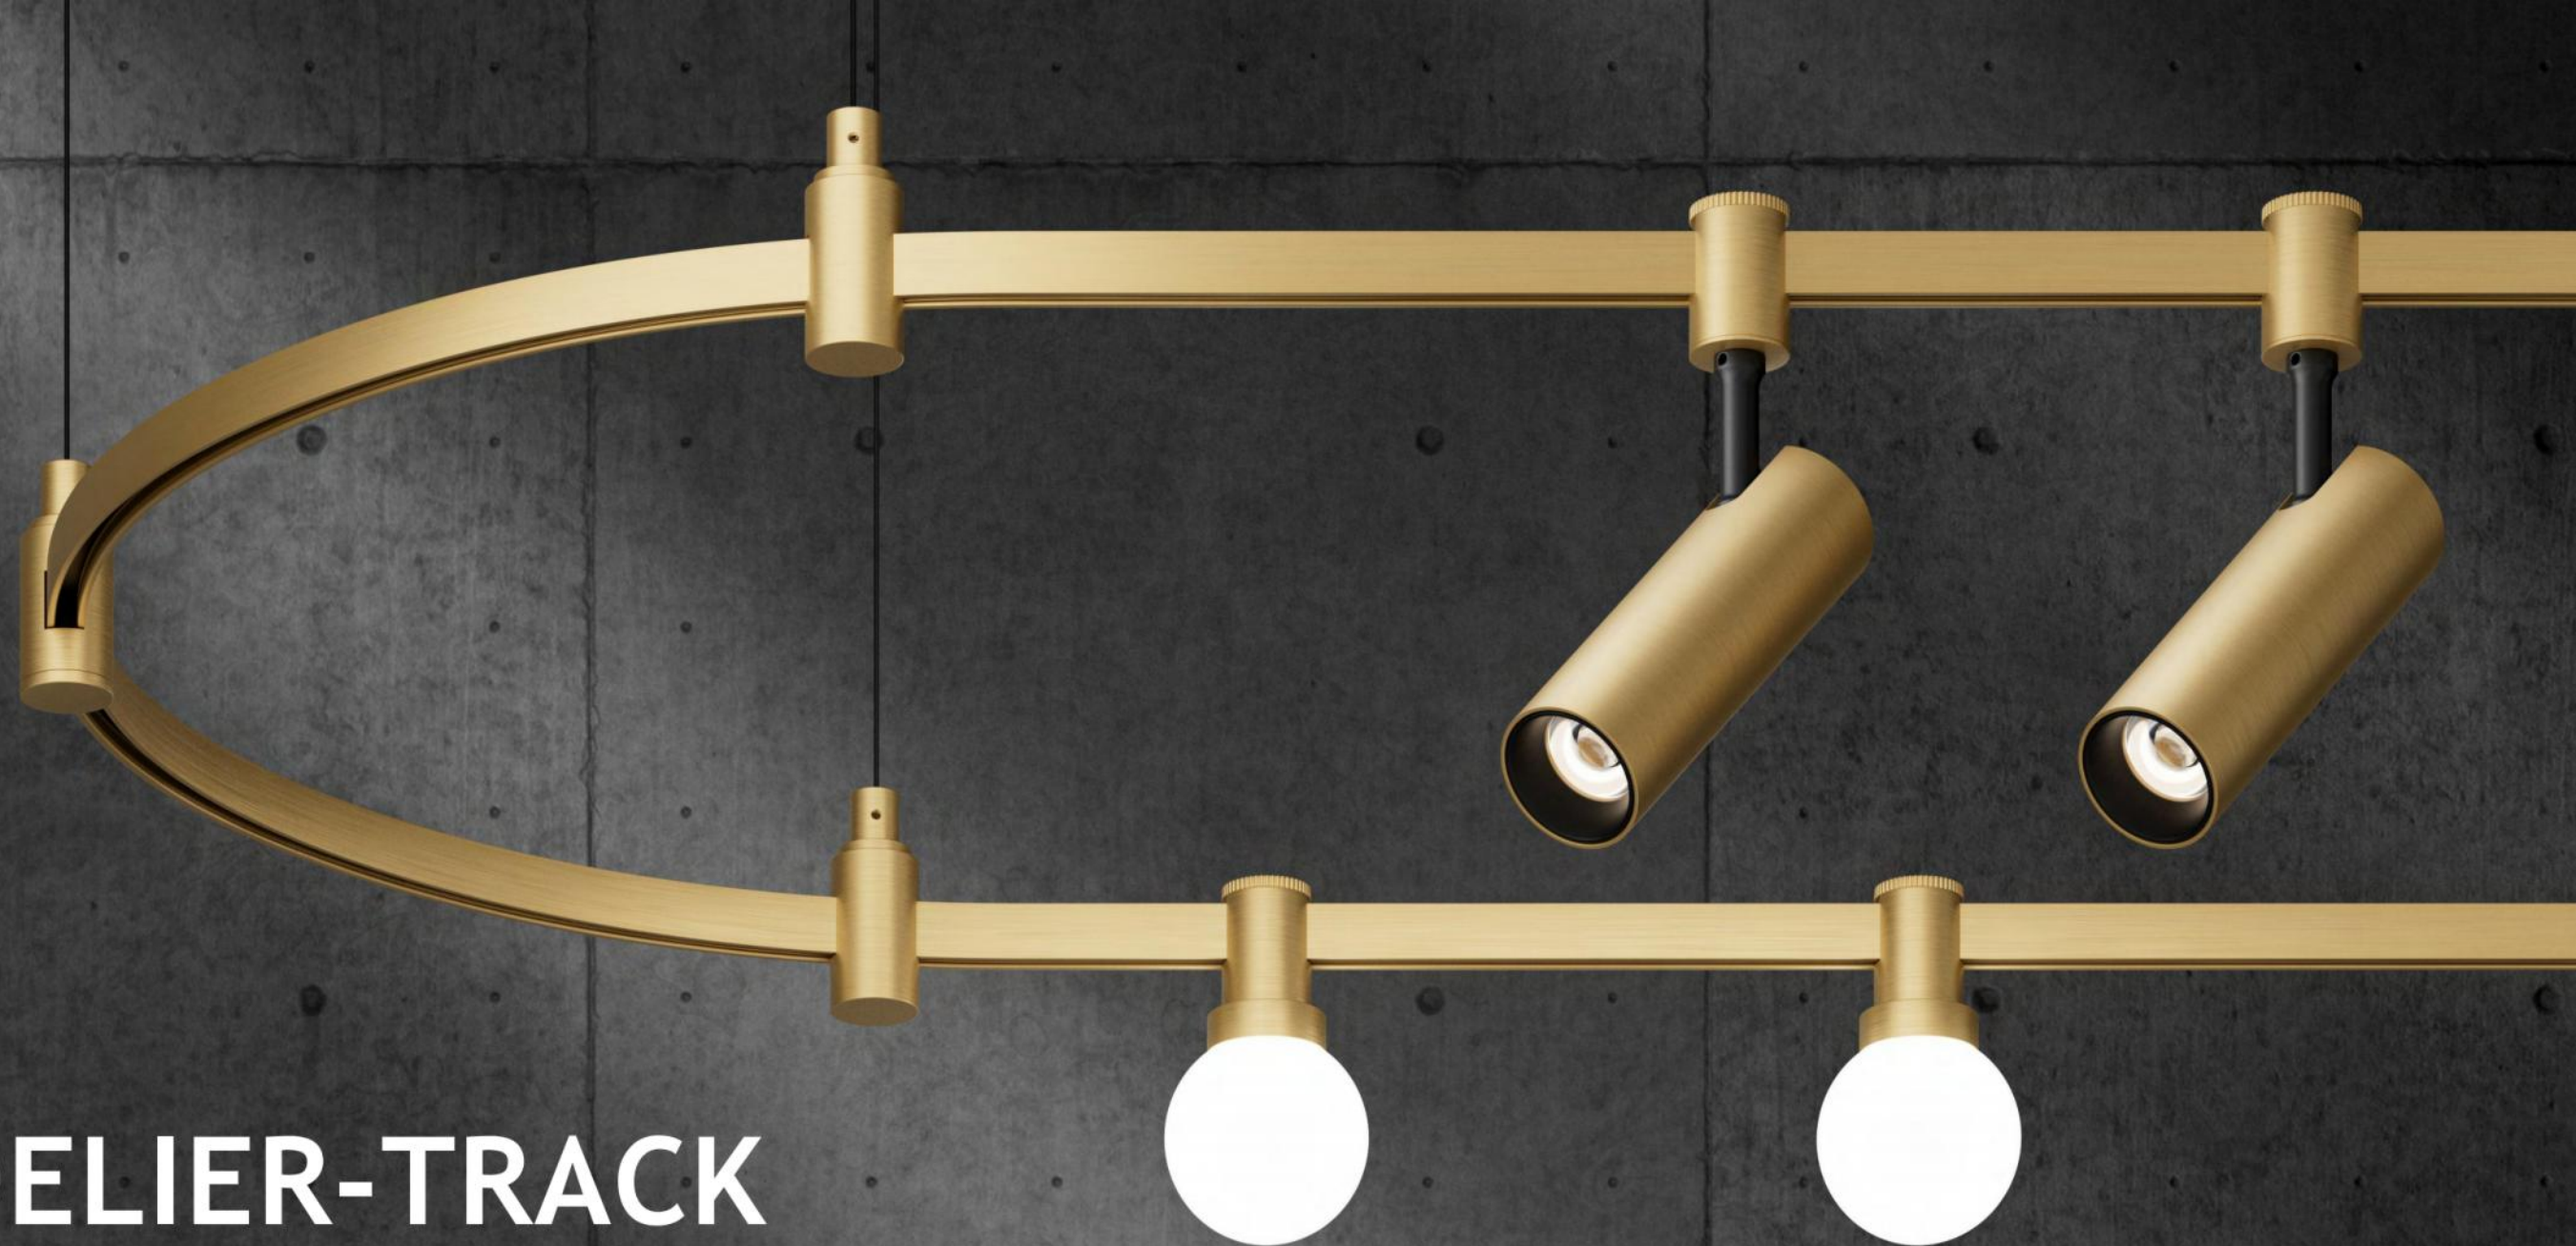

CHANDELIER-TRACK OLE04 SERIES

DC48V SYSTEM

The low voltage track system can easily applied to match with down lights, spotlights, linear lights and decorative lights, Offers flexibility and freedoms for variable lamps and design. Suitable for whole space lighting or accent lighting and decorative lighting all can apply in a handy way.

STRAIGHT TRACKS

The straight track has single-layer and double-layer track designs, and there are different sizes for you to choose from. There are three different power installation methods: On-track, External and Embedded.

You can bridge and move tracks between tracks according to your needs, providing flexible design for large-span space lighting.

Length of the Pole:

300mm+300mm/500mm+500mm/750mm+750mm/1000mm+1000mm



POWER INSTALLATION METHOD



Power Supply On-Track



External Power Supply



Embedded Power Supply

CIRCULAR ARC TRACKS


There are various diameter specifications available for the circular arc track: $\Phi 600\text{mm}$ / $\Phi 800\text{mm}$ / $\Phi 1000\text{mm}$ / $\Phi 1500\text{mm}$ / $\Phi 2000\text{mm}$.

It is suitable for different types of ceilings, creating a spacious and fashionable space, and can create more different shapes according to your needs. the diameter and the circular, square or rectangular shape.

POWER INSTALLATION METHOD



The OLE04-PL200 product can be freely transferred

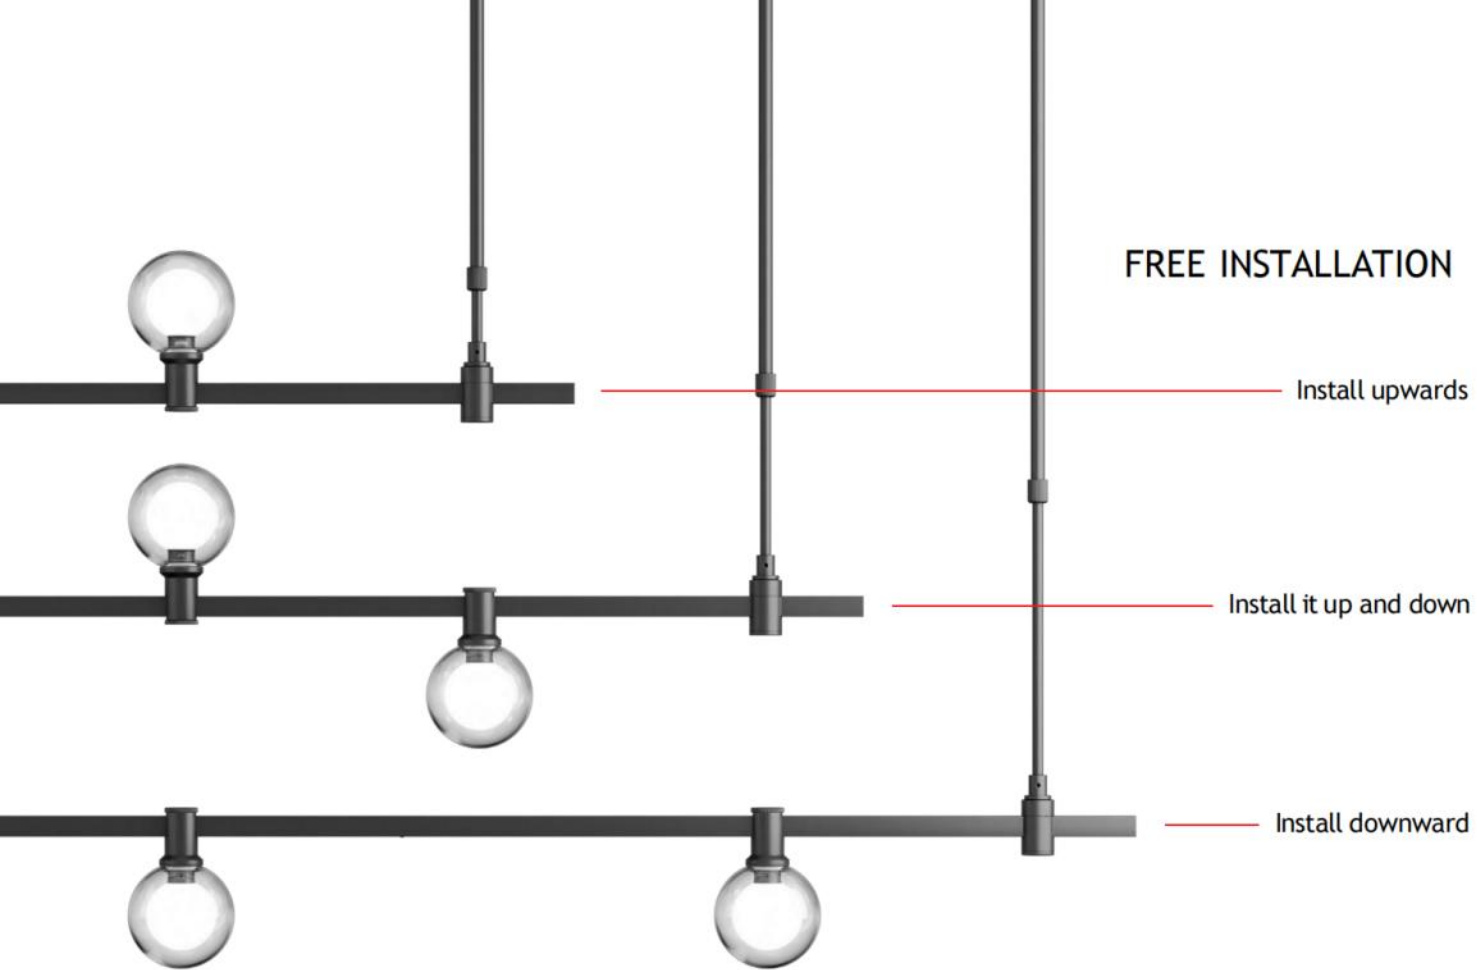

FREE INSTALLATION

Install upwards

Install it up and down


Install downward

QUICK INSTALLATION



Rotating buckle, with magnets on the lamp joint to prevent the lamp from falling off easily, making it safer and more reliable.

48V low voltage power supply with safety performance, can be directly touched, or easily slide into any position on the track according to the different needs of space




MULTIPLE COLORS AVAILABLE

There are three colors to choose from for the track: black, gold, and nickel. According to the different needs of the space, match them to create your own unique style



WORKWEAR SCENE

Suitable for workwear scene such as restaurants, bars, and front desk.

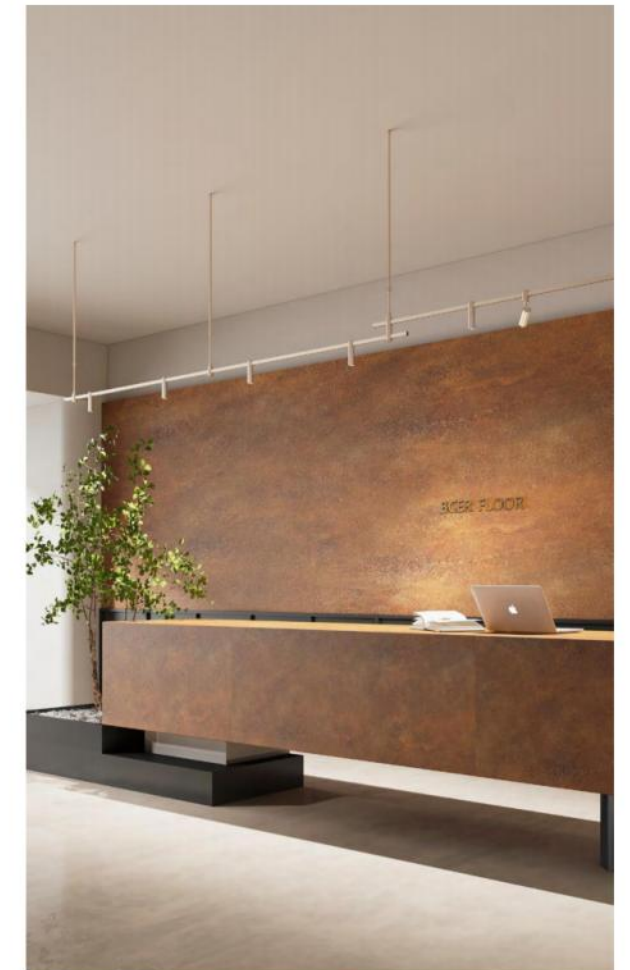




HOME DECORATION SCENE

Suitable for home decoration scene such as living room, study, and dining table at home.




STRAIGHT TRACK

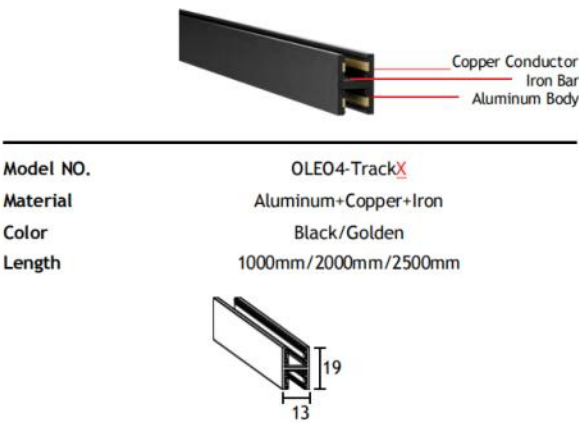

Model NO.	OLEO4-TrackX
Material	Aluminum+Copper+Iron
Color	Black/Golden
Length	1000mm/2000mm/2500mm

*X=Length Of The Track

ACCESSORIES

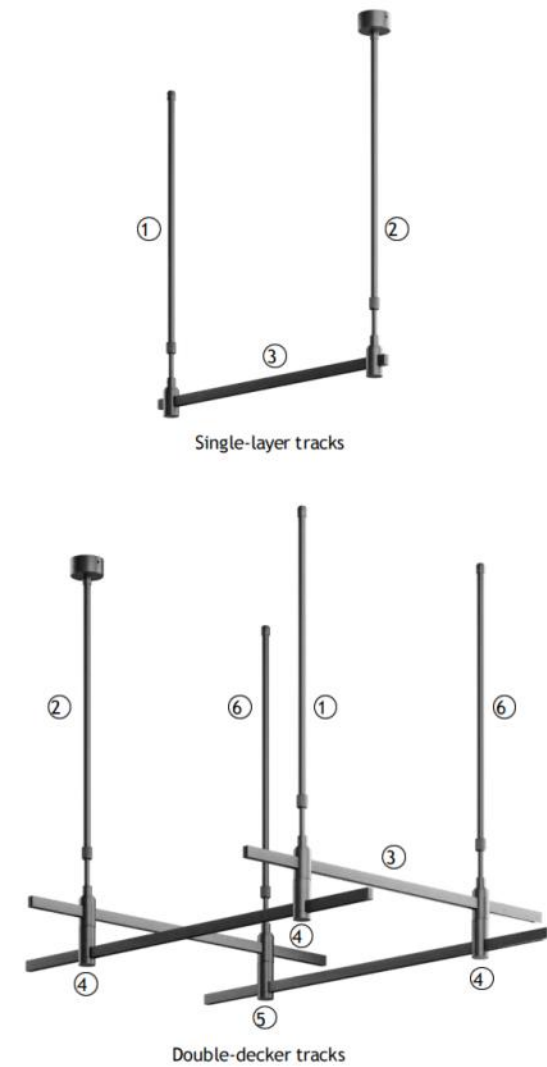

Model NO.	OLEO4-ZJ1	OLEO4-ED1
Material	Copper+PC	PC
Color	Black/ Golden	Black/ Golden
Function	Connector	End Cap

Model NO. illustrate	OLEO4-HDXXX Holder With Suspender	OLEO4-FDXXX Feeder With Suspender and Cable
Model NO. illustrate	OLEO4-Track /	OLEO4-FD2 Double Layer 360° Connector With Conductor
Model NO. illustrate	OLEO4-HD2 Double Layer 360° Holder Without	OLEO4-CDXXX Connector With Suspender Without Cable

*XXX=Length Of The Pole:300mm+300mm/500mm+500mm
750mm+750mm/ 1000mm+1000mm

ARC TRACK

Model NO.	OLEO4-Track-RX	OLEO4-Track-XRX
Material	Aluminum+Copper+Iron	Aluminum+Copper+Iron
Color	Black/Golden	Black/Golden
Dimension	Φ600mm/Φ800mm/Φ1000mm	Φ1500mm/Φ2000mm

*X=Diameter Of The Circle

POWER SUPPLY




	External Power Supply	Power Supply On-Track
Model NO.	OLEO4-SP100/EX OLEO4-SP200/EX	OLEO4-SP100/OT OLEO4-SP200/OT
Rated Power	100W	200W
Dimension	L260xW22xH25mm	L280xW22xH25mm
Input voltage	m AC180-255V	AC180-255V
Working voltage	DC48V	DC48V
Operating Current	Max.2100mA	Max.4200mA
Frequency	50/60Hz	50/60Hz
Power factor	≥0.4	≥0.4
Driver efficiency	> 80%	> 80%
Dimmable	No dimming	No dimming
Life Time IP	≥30000hrs	≥30000hrs
Grade	IP20	IP20
Protection	Over current protection-OCP 2.7A Thermal protection-OHP (> 150 °C) Surge protection-OVP (AC2000V 10s)	Over current protection-OCP 2.7A Thermal protection-OHP (> 150 °C) Surge protection-OVP (AC2000V 10s)
Working Temperature	Flickers free Form -10°C to 40°C	Flickers free Form -10°C to 40°C
Body Material	Aluminum	Aluminum

PRODUCT INFORMATION






Model NO.	OLEO4-D30	OLEO4-D40	OLEO4-D50
Power	7W	12W	18W
CCT	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V	DC48V
CRI	>90	>90	>90
Beam Angle	15°/24°/36°/60°	15°/24°/36°/60°	15°/24°/36°/60°
Material	Aluminum	Aluminum	Aluminum
Color	Black/Golden	Black/Golden	Black/Golden
Life	30 000H	30 000H	30 000H
Warranty	3 Years	3 Years	3 Years

Dimensions(mm)





Model NO.	OLEO4-D30A	OLEO4-D40A	OLEO4-D50A
Power	4W	7W	12W
CCT	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V	DC48V
CRI	>90	>90	>90
Beam Angle	90°	90°	90°
Material	Acrtlic	Acrtlic	Acrtlic
Color	Black/Golden	Black/Golden	Black/Golden
Life	30 000H	30 000H	30 000H
Warranty	3 Years	3 Years	3 Years

Dimensions(mm)





Model NO.	OLEO4-TL7	OLEO4-TL12
Power	7W	12W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	15°/24°/36°/60°	15°/24°/36°/60°
Material	Aluminum	Aluminum
Color	Black/Golden	Black/Golden
Life	30 000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)



Model NO.	OLEO4-X60	OLEO4-X80
Power	12W	18W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	15°/24°/36°/60°	15°/24°/36°/60°
Material	Aluminum	Aluminum
Color	Black/Golden	Black/Golden
Life	30 000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)





PRODUCT INFORMATION




Model NO.	OLEO4-LB5	OLEO4-LB10
Power	10W	20W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	30°	30°
Material	Aluminum	Aluminum
Color	Black/Golden	Black/Golden
Life	30 000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)




Model NO.	OLEO4-DF265	OLEO4-DF530
Power	12W	24W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	105°	105°
Material	Aluminum	Aluminum
Color	Black/Golden 30	Black/Golden
Life	000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)




Model NO.	OLEO4-G100	OLEO4-R70
Power	4W	4W
CCT	3000K/4000K/5000K	3000K/4000K/5000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	160°	160°
Material	Aluminum+Glass	Aluminum+Arctic
Color	Black/Golden	Black/Golden
Life	30 000H	30 000H
Warranty	3 Years	3 Years

Dimensions(mm)



Model NO.	OLEO4-PL200
Power	15W
CCT	3000K/4000K/5000K
Voltage	DC48V
CRI	>90
Beam Angle	105°
Material	Aluminum+PC+Arctic
Color	Black/Golden
Life	30 000H
Warranty	3 Years

Dimensions(mm)





www.older-lux.com



@olderlighting Instagram

SMART KNOB OLEO-NB

Dimension: $\phi 70 \times 22 \text{mm}$

Material: Aluminum/PC


Color: Black/Gold/Nickel

Battery: AAA battery*2

Solution: 2.4G/TUYA WIFI/Zigbee

Control: Button/Knob

Operating Temperature: $-10 \sim 40^{\circ}\text{C}$

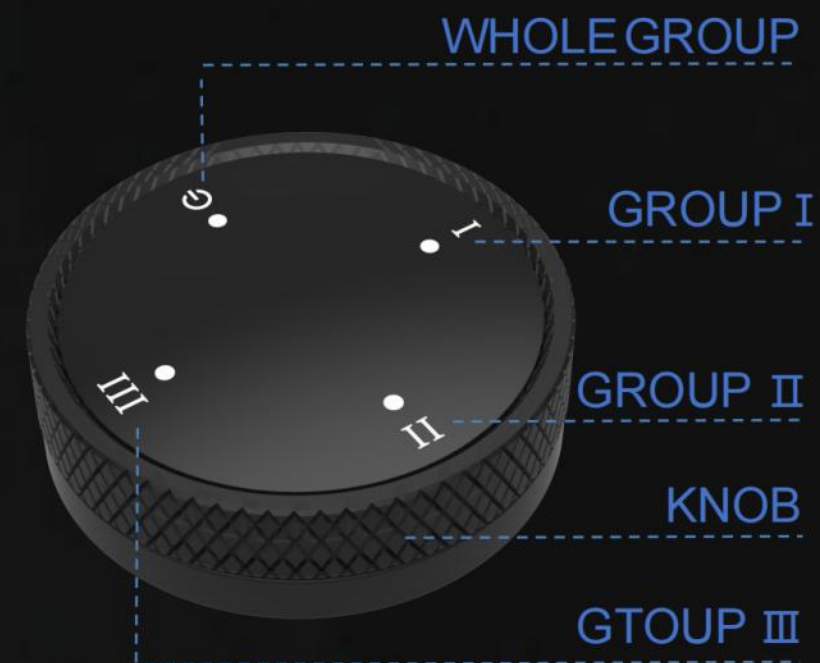

2.4G

