



OLEO5 SUPERSLIM

magnetic track system-48V

2.4G




 zigbee

Equipped with
OLEO-NB

Smart Knob Controller



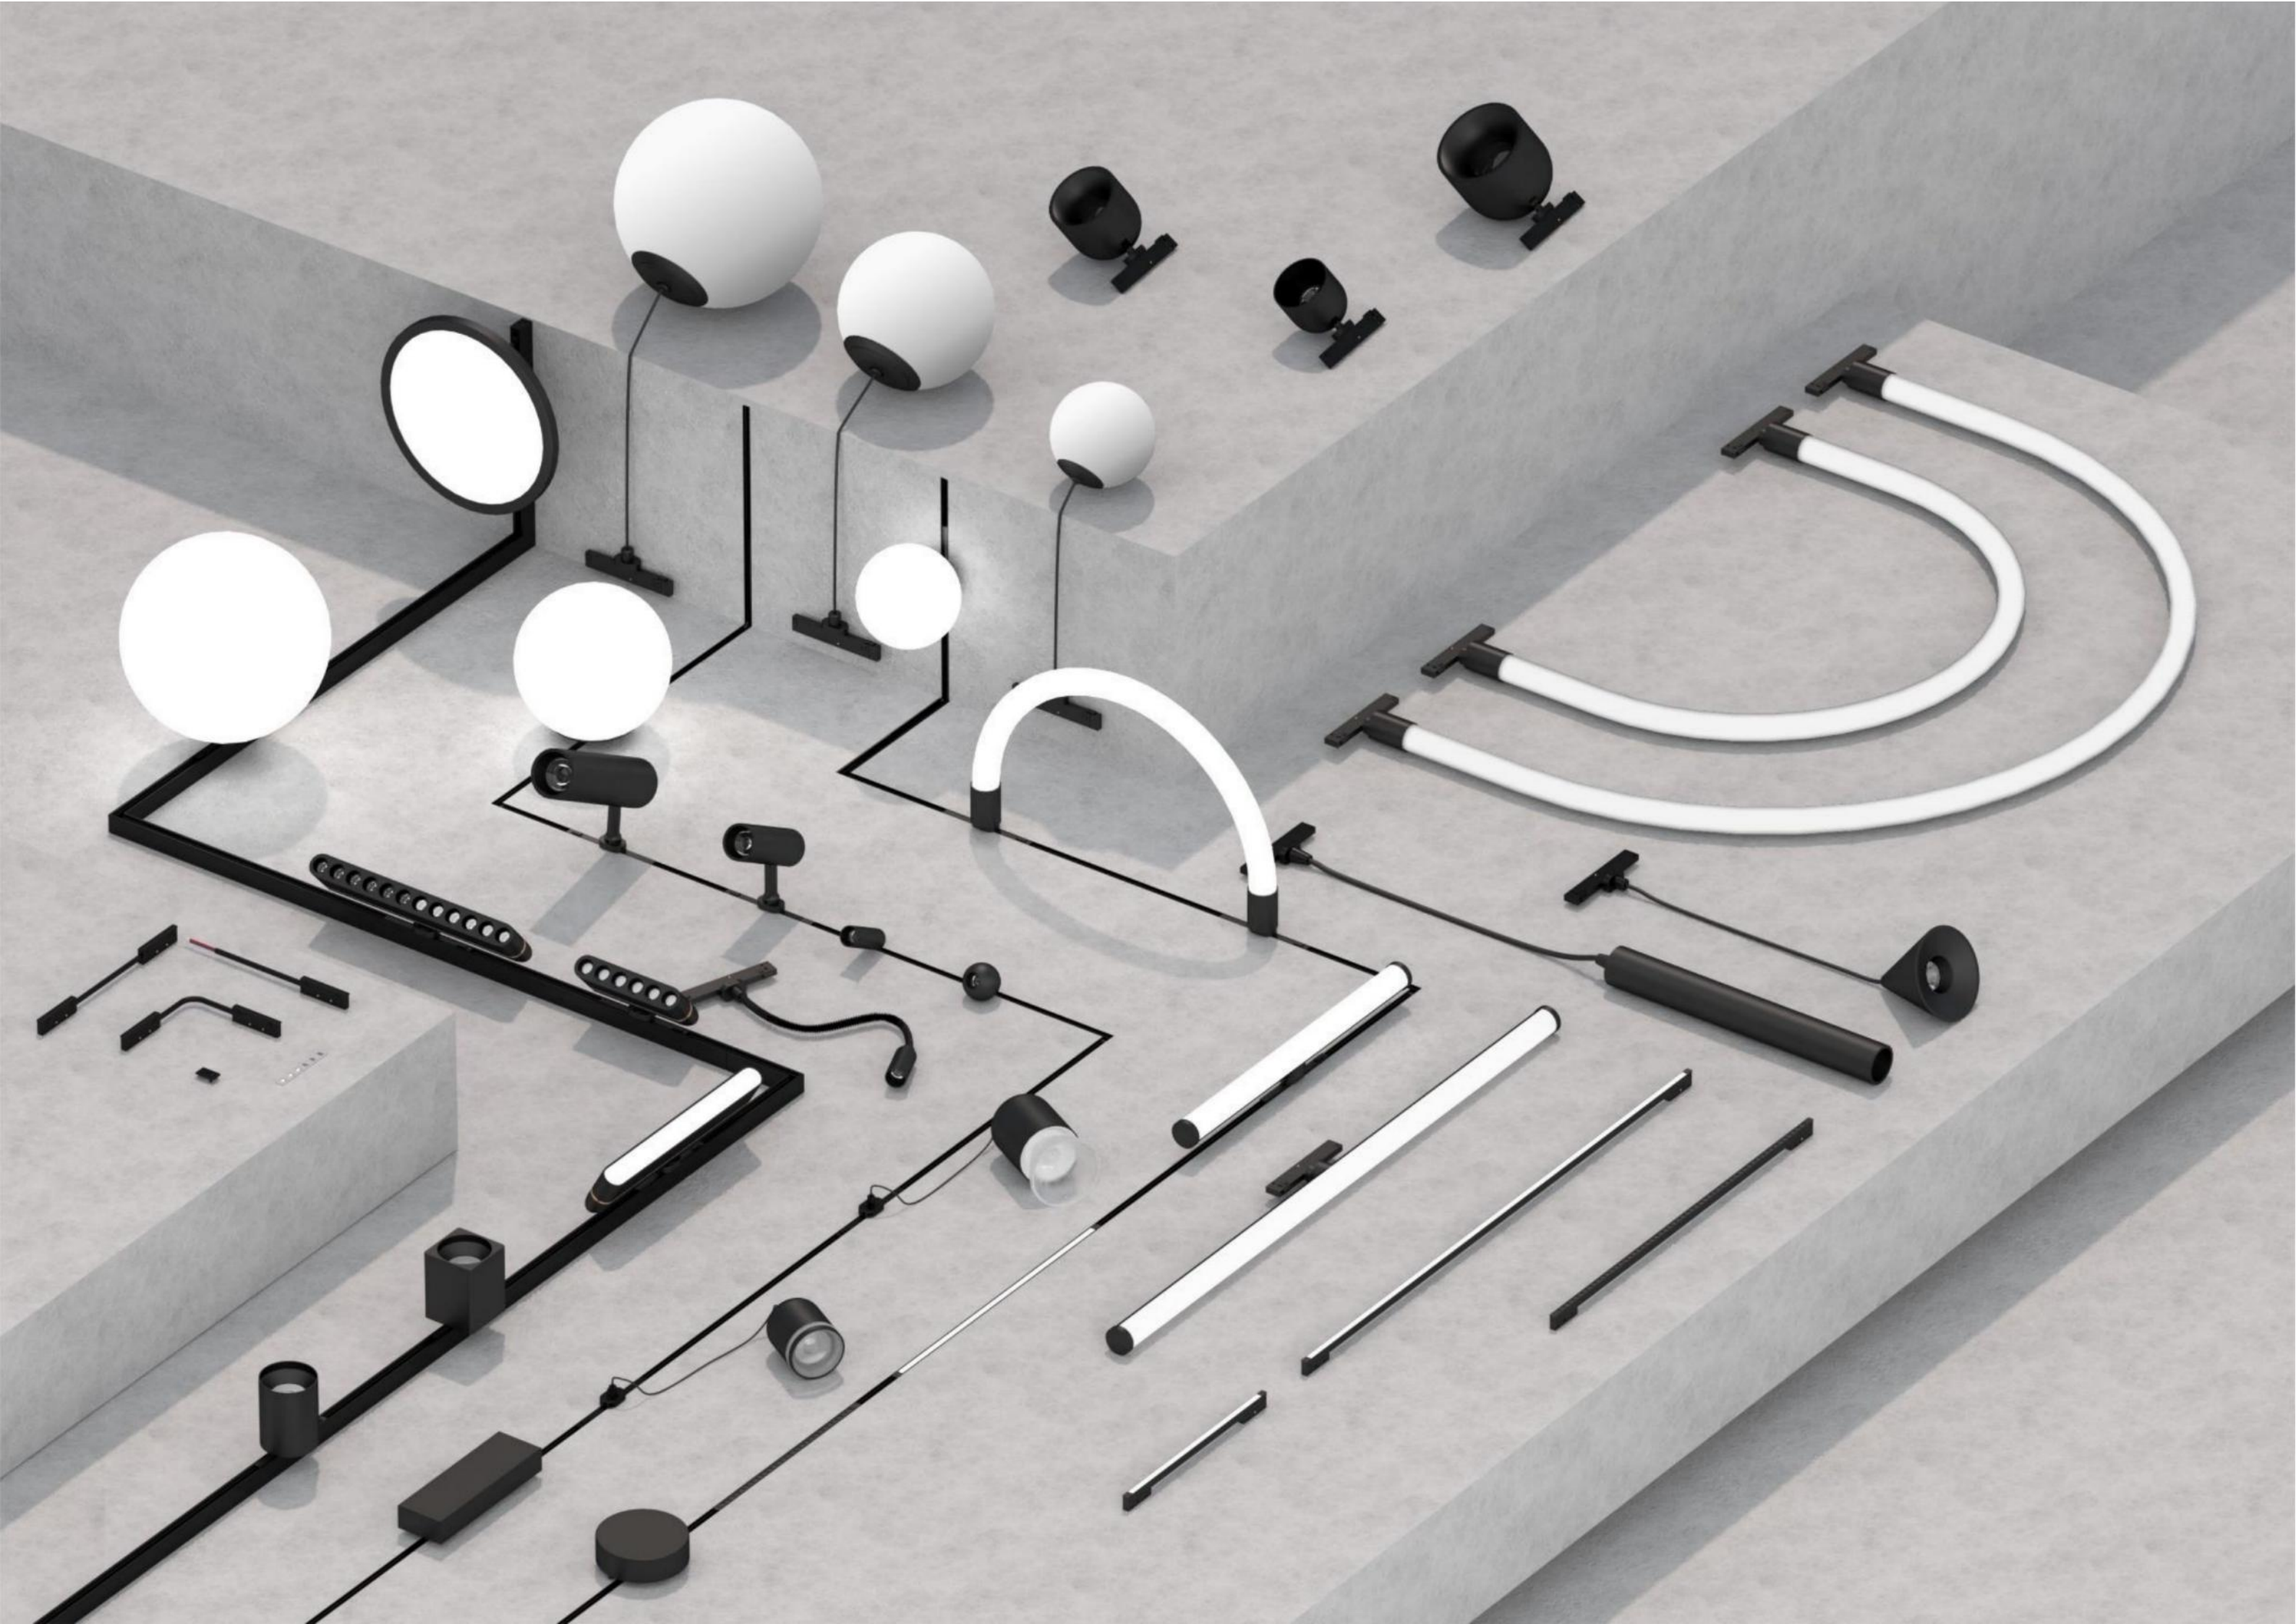

OLEO5

MAGNETIC TRACK SYSTEM-48V





OLEO5MAGNETIC TRACK SYSTEM-48V



OLEO5

Ultra-compact, ultra-thin size, and minimalist Design: OLEO5 is a new micro-track system, only 6 millimeters, suitable for surface mounting, pendant lights, and frameless lighting solutions.

6mm
┌─┐

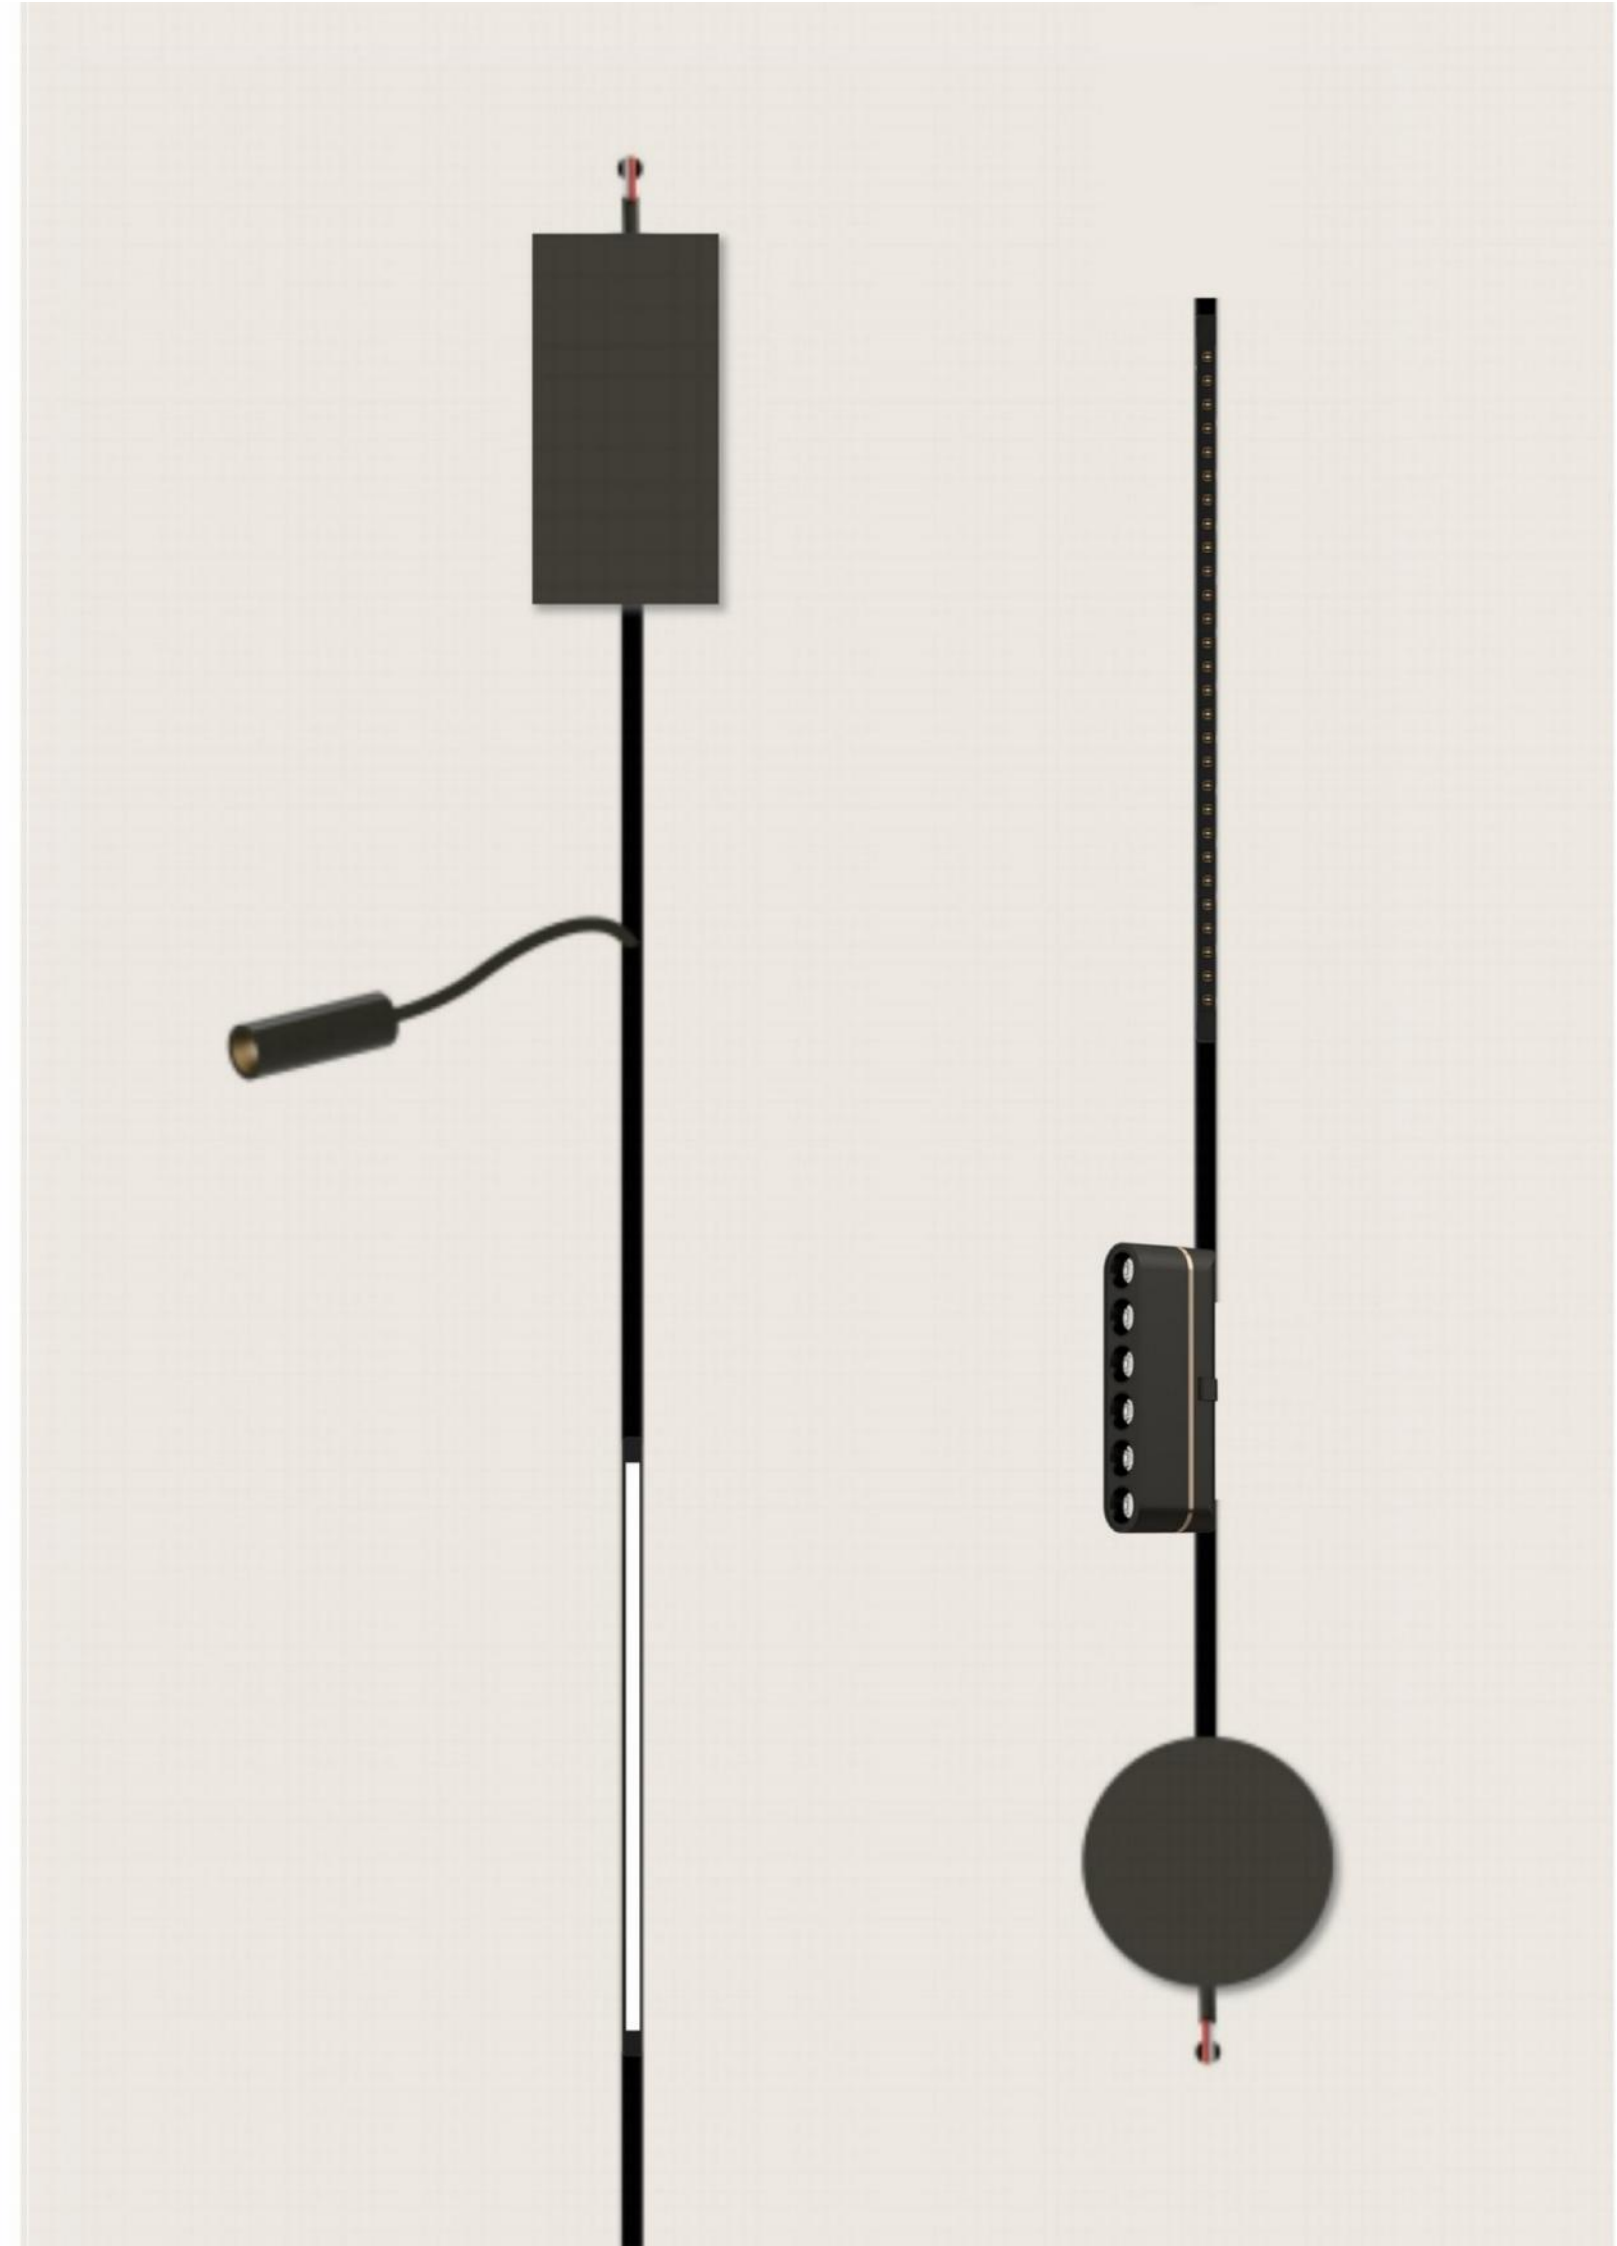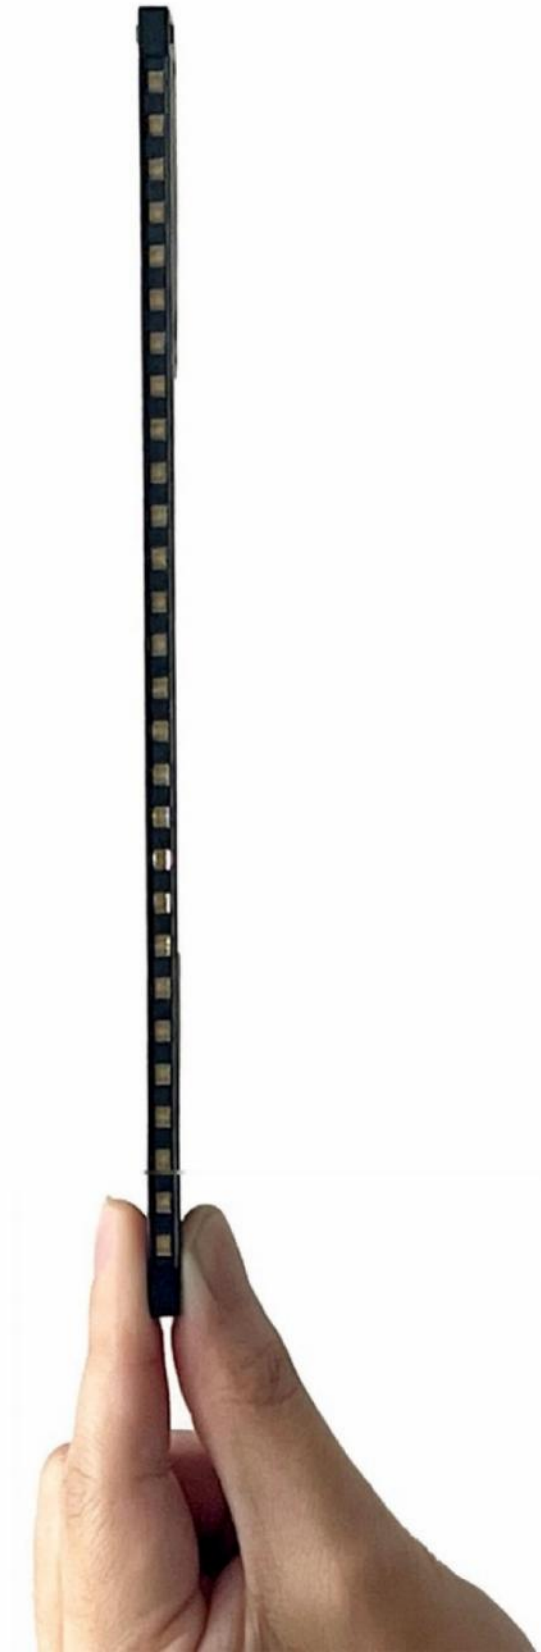


OLEO5

Track lighting installation with safety button



OLEO5

It is a complete system with tracks for different applications in order to meet all the technical and design needs.

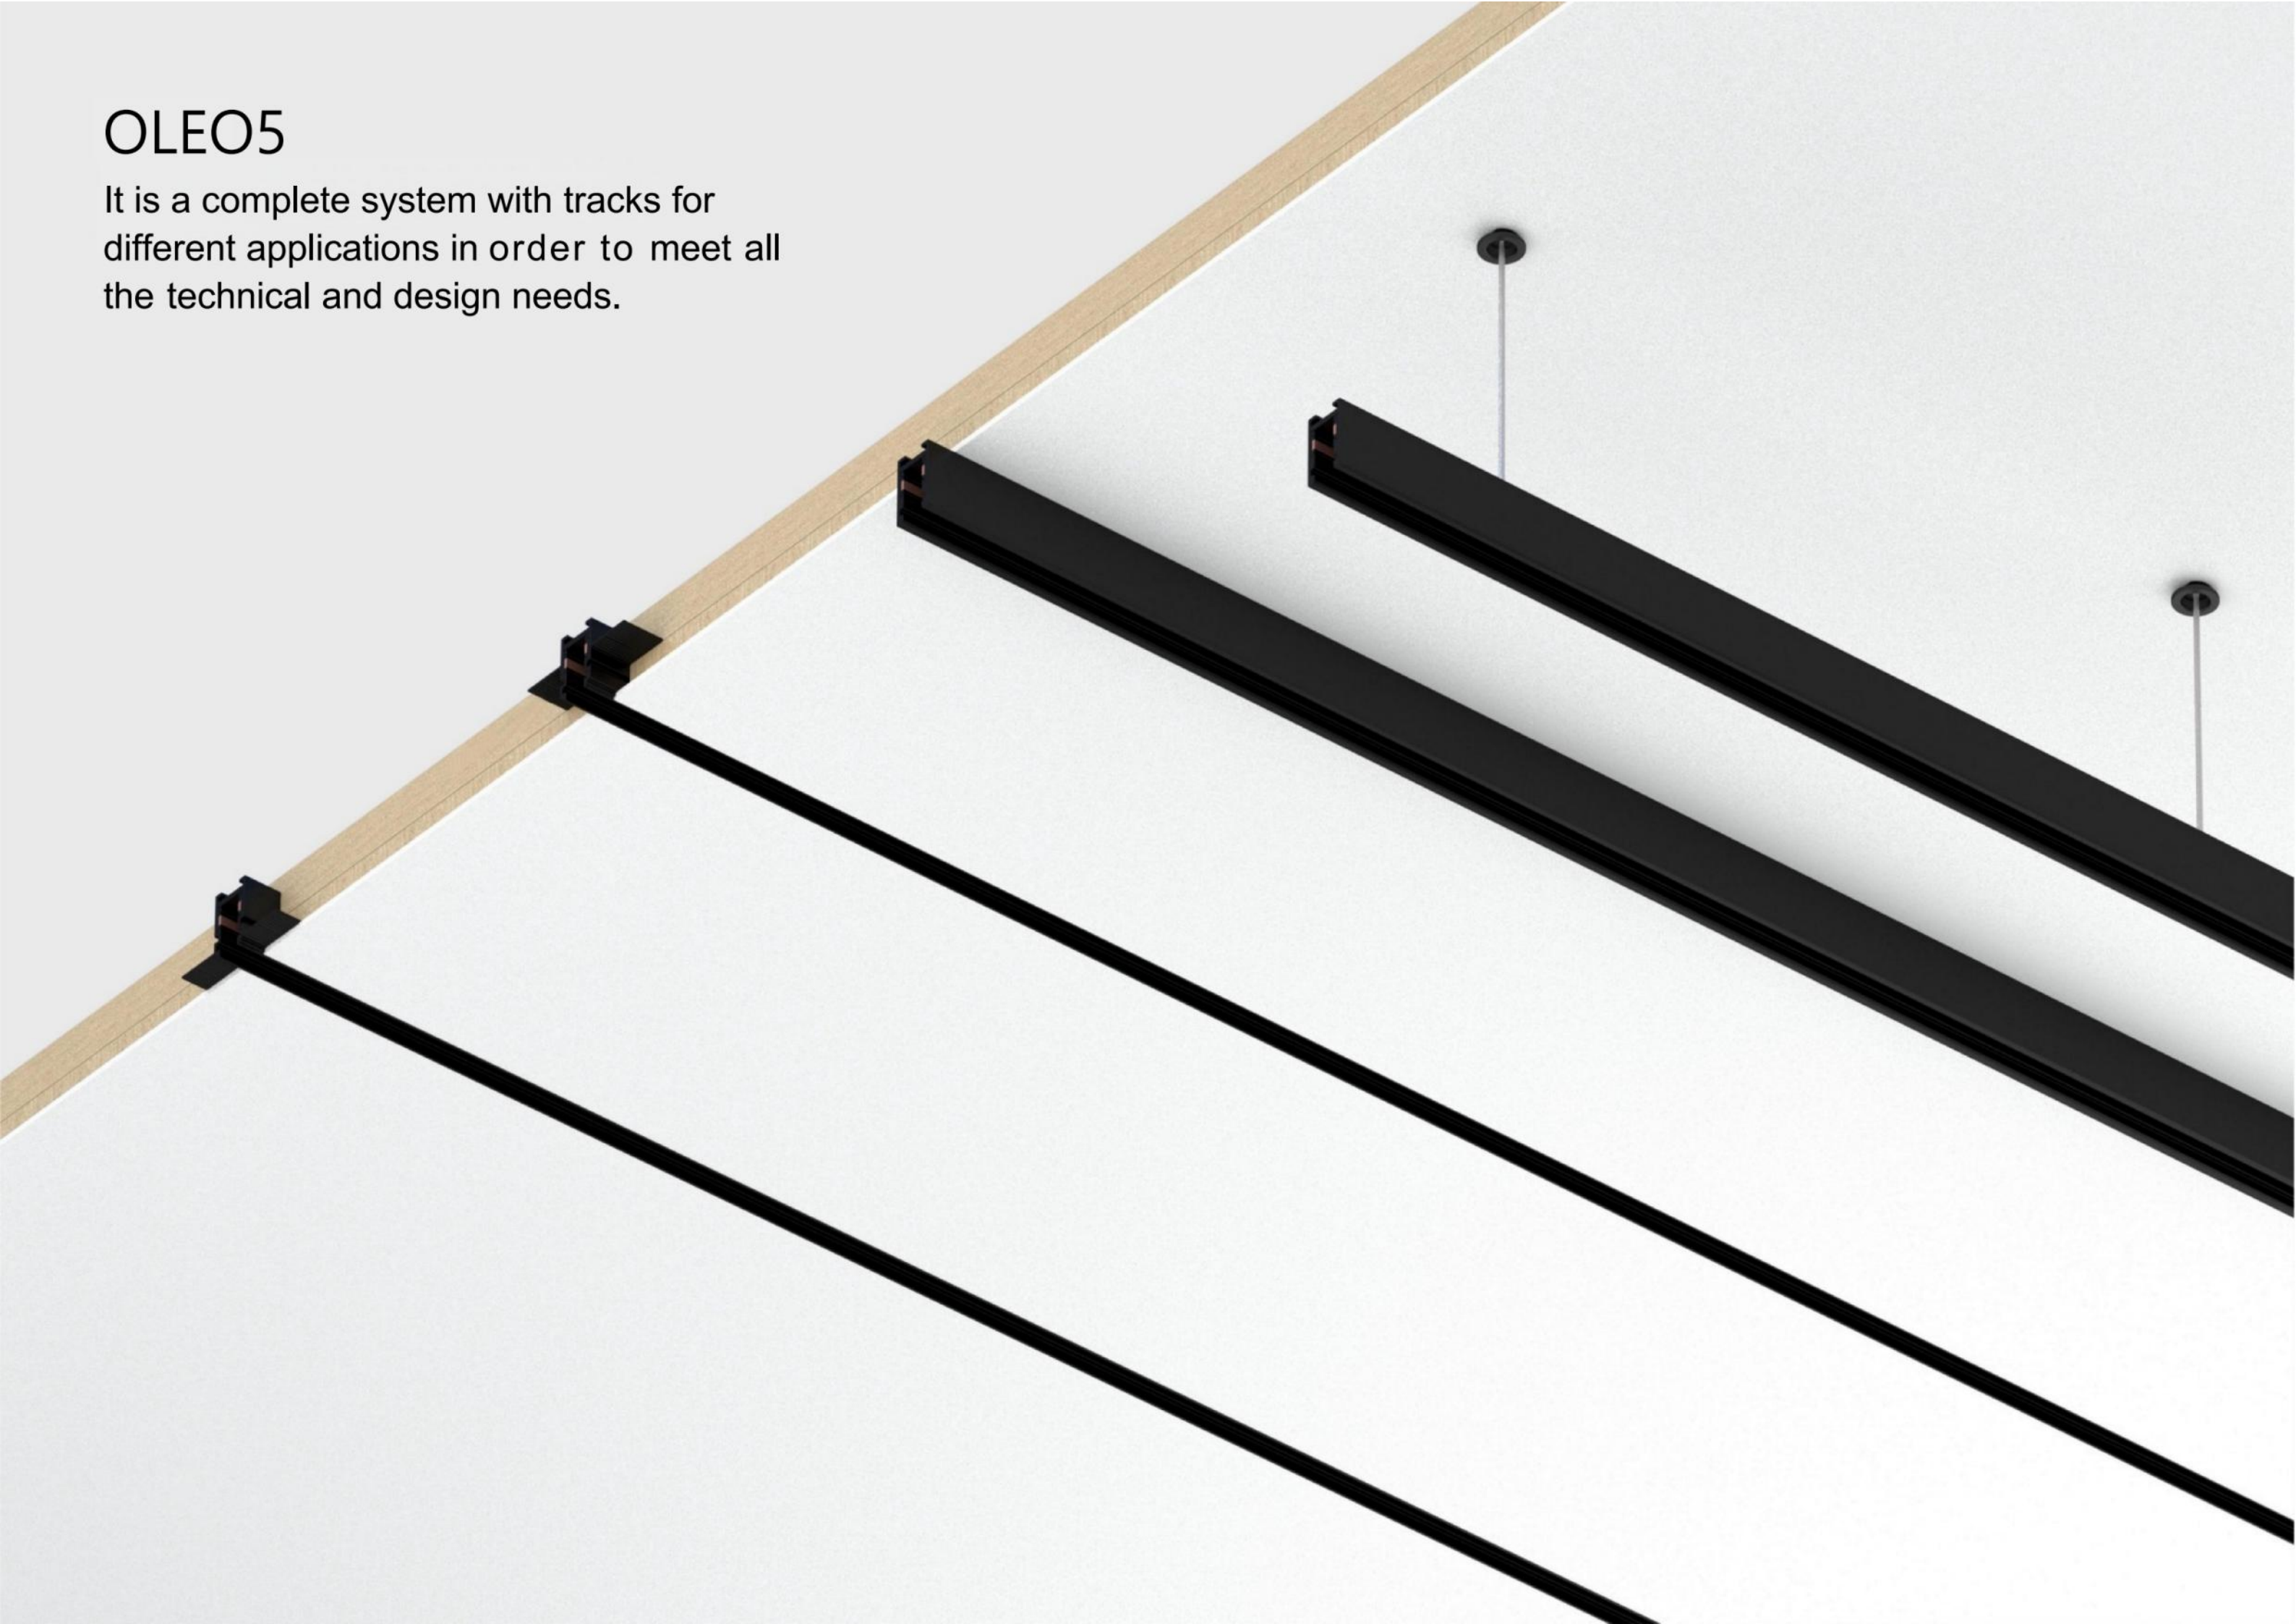

OLEO5 TRACK & ACCESSORIES

Model No.
Installation
Material
Color
Size
Description



OLEO5-TH06
Surface
Aluminum&Copper
Black
W20*H12mm
Input Voltage:DC48V
Weight:300g/m
Copper Size:2.8*0.6mm
Length:
1000mm/2000mm/3000mm






CORNER(CTOC)
Surface
Aluminum
Black
L80*W80*H20mm
Corner set 90°
for TH06 track




CORNER(CTOW)
Surface
Aluminum
Black
L40*W40*H20mm
Corner set IN 90°
for TH06 track

Dimensions

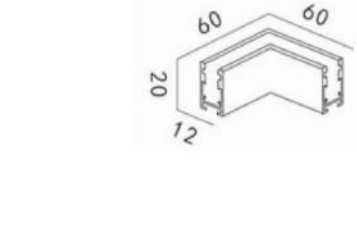

Model No.
Installation
Material
Color
Size
Description



OLEO5-TL06
Recessed
Aluminum&Copper
Black
W38*H20mm
Input Voltage:DC48V
Weight:320g/m
Copper Size:2.8*0.6mm
Length:
1000mm/2000mm/3000mm



CORNER(CTOC)
Recessed
Aluminum
Black
L60*W60*H20mm
Corner set 90°
for TL06 track







TCORNER(CTOW)
Recessed
Aluminum
Black
L40*W40*H20mm
CornersetIN90°
for TL06 track




CORNEROUT90°
Recessed
Aluminum
Black
L40*W40*H20mm
cornersetOUT90°
for TL06 track


Dimensions




Model No.
Installation
Material
Color
Size
Description



OLEO5-TC06
Recessed
Aluminum&Copper
Black
W38*H20mm
Input Voltage:DC48V
Weight:320g/m
CopperSize:2.8*0.6mm
Length:
1000mm/2000mm/3000mm



CORNER(CTOC)
Recessed
Aluminum
Black
L60*W60*H20mm
Corner set 90°
for TCO6 track







CORNER(CTOW)
Recessed
Aluminum
Black
L40*W40*H20mm
Cornerset IN90°
for TCO6 track



CORNEROUT90°
Recessed
Aluminum
Black
L40*W40*H20mm
cornersetOUT90°
for TCO6 track

Dimensions



Model No.
Material
Color
Size
Description



CONNECTOR
Iron
L70*W9.5*H1.0mm
Connectthetracks



INPUTMODULE
Aluminum&PC
Black
L53*H16*W6mm
Connectthetrackto
the Power Supply






CORNER
CONNECT MODULE
Aluminum&PC
Black
L207*H16*W6mm
Connecttwo tracks
to conduct the electricity



ENDCAP
Aluminum&PC
Black
L20*W12*H7mm
End caps for track

Dimensions




OLEO5 CONTROL SYSTEM




Regular integrated power supply




External TRIAC system

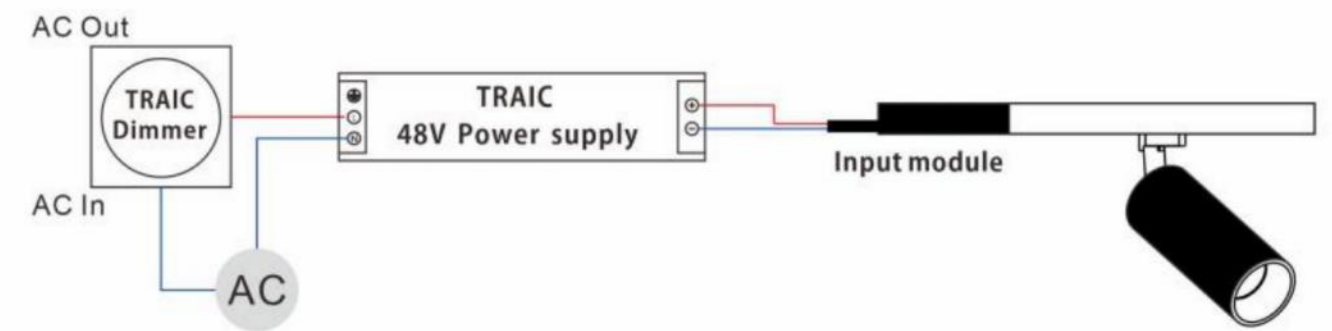





External power supply

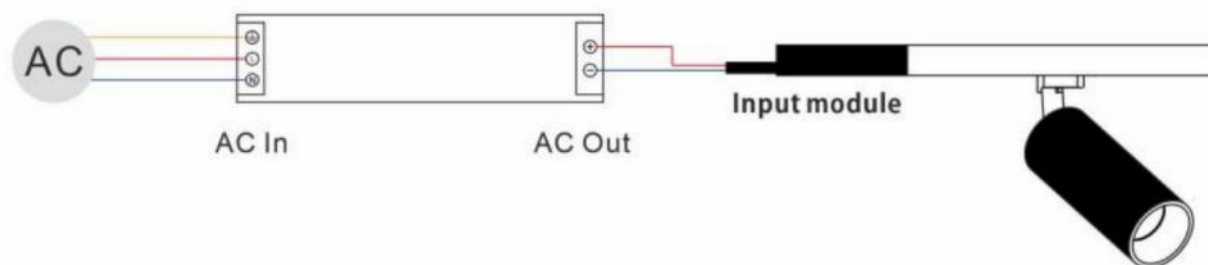


External 0-10V dimming system
External DALI dimming system

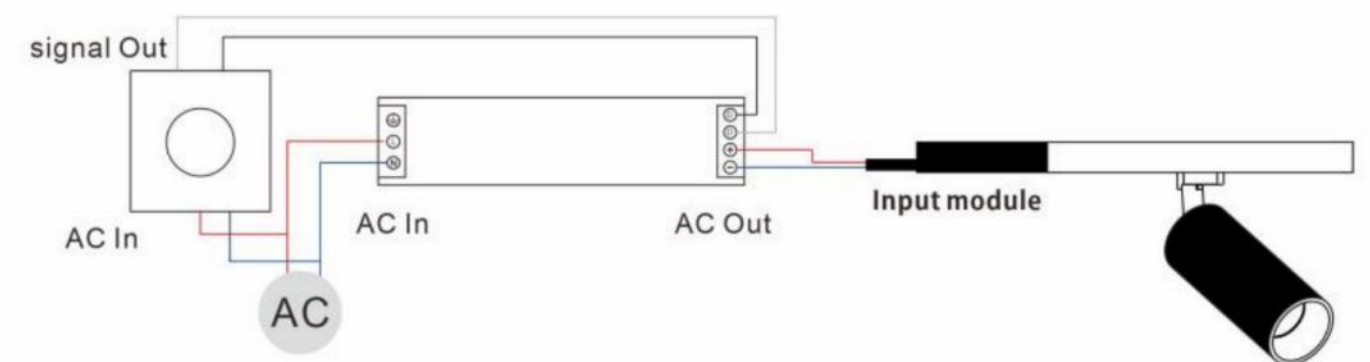


OLEO5 WIRELESS SMART SYSTEM

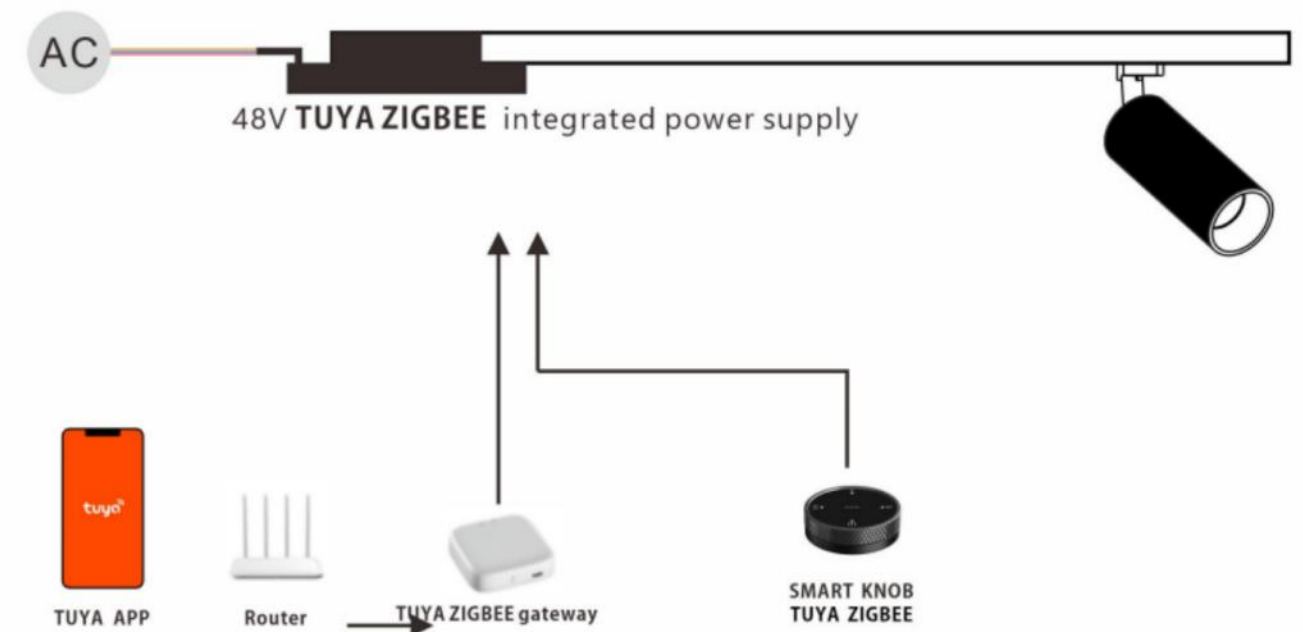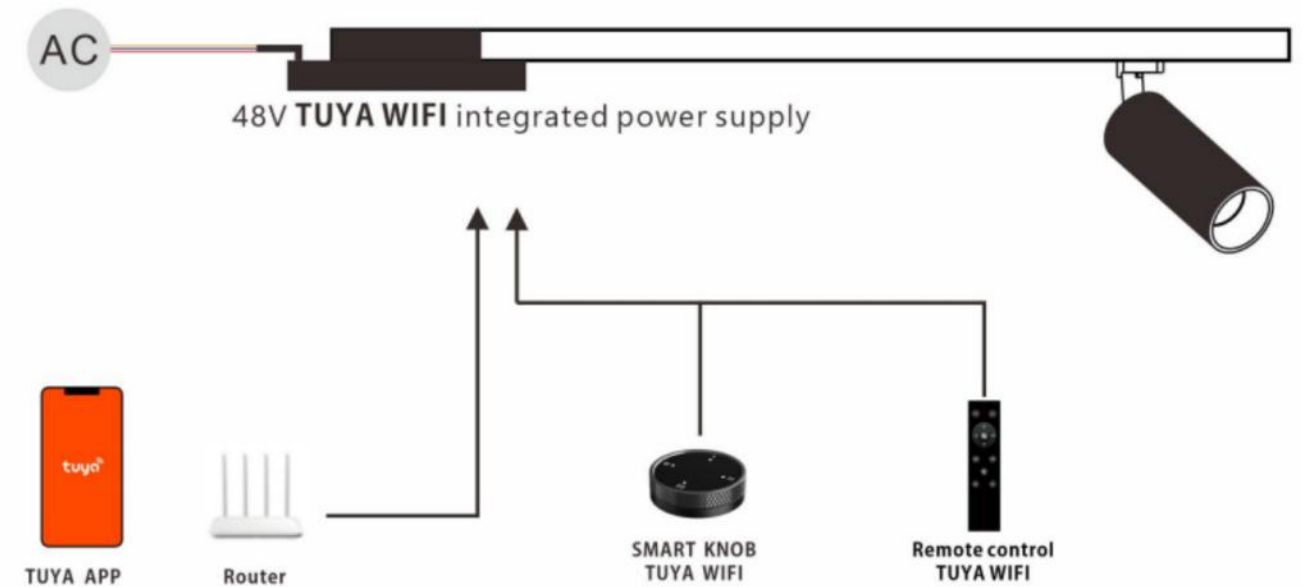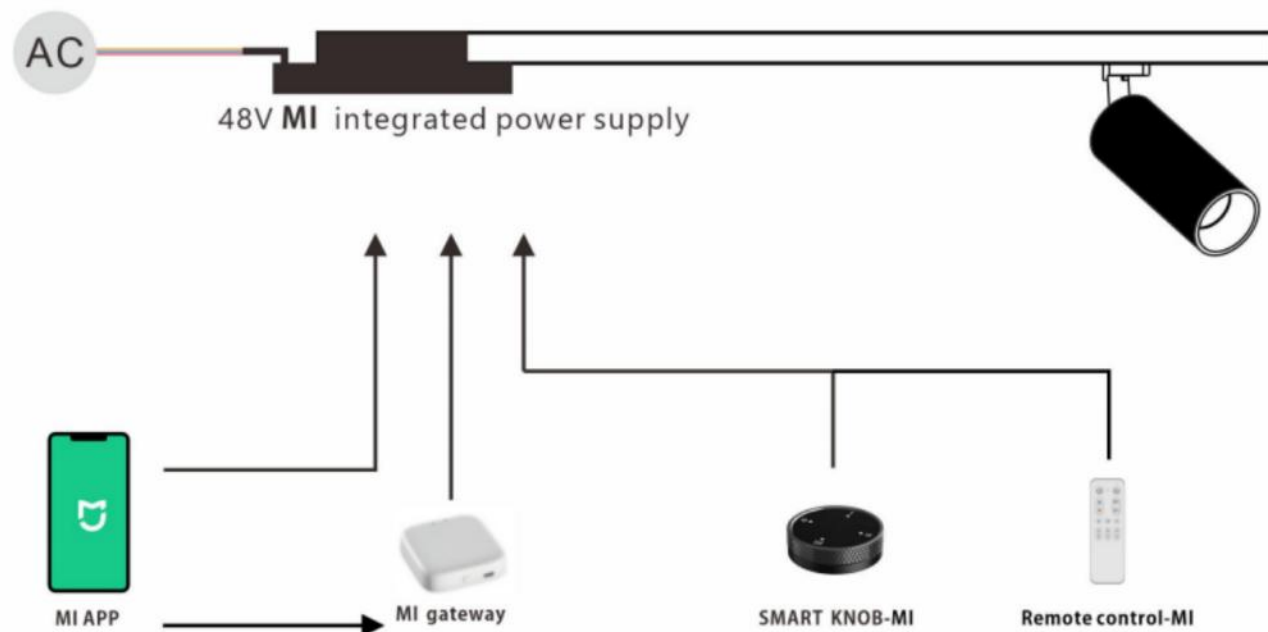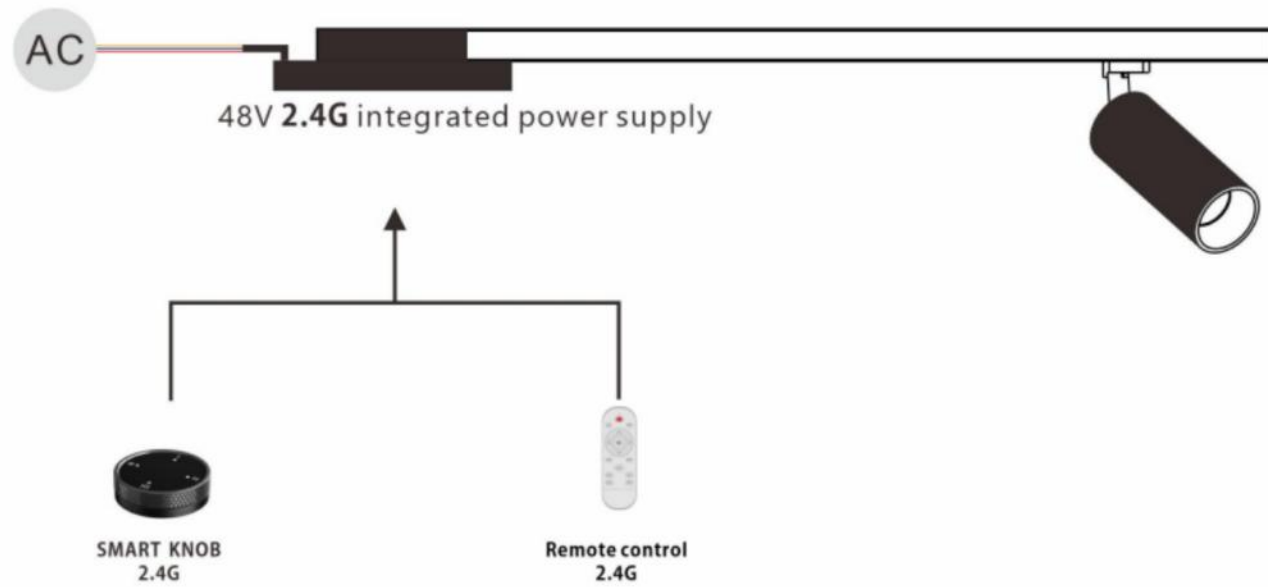

OLEO5 CONTROL SYSTEM






Model No.	OLEO5-SP100-R OLEO5-SP200-R	OLEO5-SP100-S OLEO5-SP200-S
Power	100W/200W	100W/200W
Dimension	φ85*H25mm	L152*W48*H24mm L200*W48*H24mm
Input voltage	AC180-255V	AC180-255V
Output voltage	DC48V	DC48V
Output Current	Max 2.1A/Max4.2A	Max 2.1A/Max4.2A
Frequency	50/60Hz	50/60Hz
Power factor	≥0.4	≥0.4
Efficiency	>80%	>80%
Dimmable	No dimming	No dimming
Life Time	≥30000hrs	≥30000hrs
IP Grade	IP20	IP20
Protection	Over current protection- OCP 2.7A Thermal protection-OHP(>150℃)Surge protection-OVP(AC2000V10s) Flickers free	Over current protection- OCP 2.7A Thermal protection-OHP(>150℃)Surge protection-OVP(AC2000V 10s) Flickers free
WorkingTemperature	Form-10℃ to 40℃	Form-10℃ to 40℃
Material	Aluminum	Aluminum






Model No.	OLEO5-SP100-S/KY OLEO5-SP200-S/KY	OLEO5-SP100-S/CB OLEO5-SP200-S/CB
Power	100W/200W	100W/200W
Dimension	L152*W48*H24mm L200*W48*H24mm	L152*W48*H24mm L200*W48*H24mm
Input voltage	AC85-265V	AC180-255V
Output voltage	DC48V	DC48V
Output Current	Max 2.1A/Max4.2A	Max 2.1A/Max4.2A
Frequency	50/60Hz	50/60Hz
Power factor	≥0.4	≥0.4
Efficiency	>80%	>80%
Dimmable	No dimming	Dimmable&CCT adjustable
Life Time	≥30000hrs	≥50000hrs
IP Grade	IP20	IP20
Protection	Over current protection- OCP 2.7A Thermal protection-OHP(>150℃)Surge protection-OVP(AC2000V 10s) Flickers free	Over current protection- OCP 2.7A Thermal protection-OHP(>150℃)Surge protection-OVP(AC2000V 10s) Flickers free
WorkingTemperature	Form-10℃ to 40℃	Form-10℃ to 40℃
Material	Aluminum	Aluminum
Solution	  	


OLEO5 LIGHTS

Model No. Power CCT Voltage CRI Beam Angle Material Color Warranty Dimensions			
	OLEO5-DF200	OLEO5-DF300	OLEO5-DF400
	5W	7W	10W
	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
	DC48V >90 105° Aluminum&PC Black 3Years	DC48V >90 105° Aluminum&PC Black 3Years	DC48V >90 105° Aluminum&PC Black 3Years

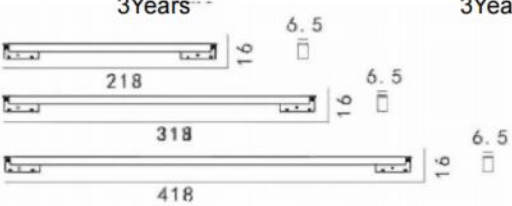


Model No. Power CCT Voltage CRI Beam Angle Material Color Warranty Dimensions			
	OLEO5-DF600	OLEO5-DF900	OLEO5-DF1200
	14W	21W	28W
	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
	DC48V >90 105° Aluminum&PC Black 3Years	DC48V >90 105° Aluminum&PC Black 3 Years	DC48V >90 105° Aluminum&PC Black 3Years

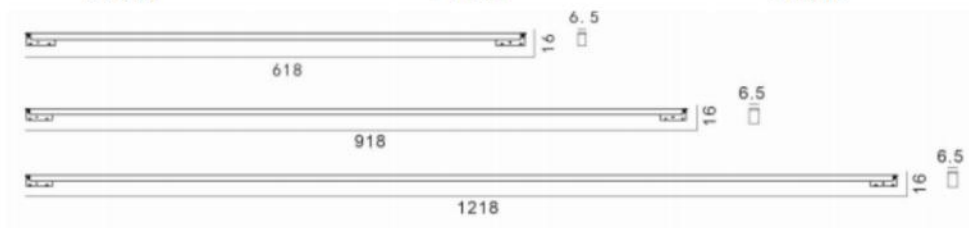

Model No. Power CCT Voltage CRI Beam Angle Material Color Warranty Dimensions		
	OLEO5-LB28	OLEO5-LB56
	5W	10W
	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
	DC48V >90 60° Aluminum&PC Black 3 Years	DC48V >90 60° Aluminum&PC Black 3 Years



Model No. Power CCT Voltage CRI Beam Angle Material Color Warranty Dimensions			
	OLEO5-FD6	OLEO5-FD12	OLEO5-FD12D
	6W	12W	12W
	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K
	DC48V >90 30° Aluminum&PC Black 3 Years	DC48V >90 30° Aluminum&PC Black 3 Years	DC48V >90 105° Aluminum&PC Black 3Years

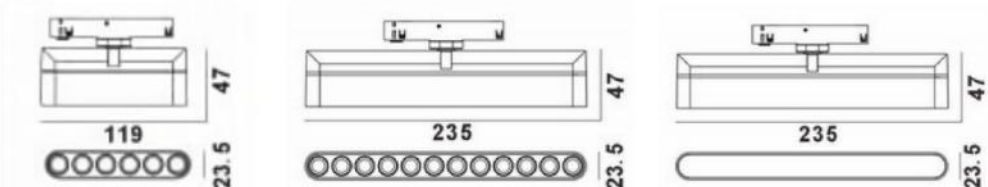


OLEO5 LIGHTS




Model No.	OLEO5-WTLR3	OLEO5-WTL3
Power	2.5W	2.5W
CCT	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	30°	30°
Material	Aluminum&PC	Aluminum&PC
Color	Black	Black
Warranty	3Years	3 Years
Dimensions		




Model No.	OLEO5-TLR3	OLEO5-TL3
Power	2.5W	2.5W
CCT	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	30°	30°
Material	Aluminum&PC	Aluminum&PC
Color	Black	Black
Warranty	3 Years	3 Years
Dimensions		






Model No.	OLEO5-TL7	OLEO5-TL12	OLEO5-TL20
Power	7W	12W	20W
CCT	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V	DC48V
CRI	>90	>90	>90
Beam Angle	24°	24°	24°
Material	Aluminum&PC	Aluminum&PC	Aluminum&PC
Color	Black	Black	Black
Warranty	3 Years	3Years	3Years
Dimensions			



Model No.	OLEO5-DS54	OLEO5-DR54	OLEO5-DR54R
Power	7W	7W	7W
CCT	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V	DC48V
CRI	>90	>90	>90
Beam Angle	24°	24°	24°
Material	Aluminum&PC	Aluminum&PC	Aluminum&PC
Color	Black	Black	Black
Warranty	3 Years	3Years	3Years
Dimensions			



OLEO5 LIGHTS



			
Model No.	OLEO5-FT500	OLEO5-FT1000	OLEO5-FT1500
Power	7W	14W	21W
	3000K,4000K,5000K	3000K,4000K,5000K	3000K,4000K,5000K
	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	DC48V	DC48V	DC48V
CRI	>80	>80	>80
Beam Angle	360°	360°	360°
Material	Silicone	Silicone	Silicone
Color	Black	Black	Black
Warranty	3 Years		3Years
Dimensions			



			
Model No.	OLEO5-PL200	OLEO5-DFT345	OLEO5-DFT690
Power	15W	10W	20W
CCT	3000K,4000K,5000K	3000K,4000K,5000K	3000K,4000K,5000K
	3000K/4000K,3000K-6000K	3000K/4000K,3000K-6000K	3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V	DC48V
CRI	>90	>90	>90
Beam Angle	110°	270°	270°
Material	Aluminum&PC	PC	PC
Color	Black	Black	Black
Warranty	3 Years	3 Years	3 Years
Dimensions			



			
Model No.	OLEO5-HB100	OLEO5-HB150	OLEO5-HB200
Power	4W	7W	7W
CCT	3000K,4000K,5000K	3000K,4000K,5000K	3000K,4000K,5000K
	3000K/4000K,3000K-6000K	3000K/4000K,3000K-6000K	3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V	DC48V
CRI	>90	>90	>90
Beam Angle	200°	250°	320°
Material	Aluminum&Glass	Aluminum&Glass	Aluminum&Glass
Color	Black	Black	Black
Warranty	3 Years	3 Years	3Years
Dimensions			

			
Model No.	OLEO5-HBS100	OLEO5-HBS150	OLEO5-HBS200
Power	4W	7W	7W
CCT	3000K,4000K,5000K	3000K,4000K,5000K	3000K,4000K,5000K
	3000K/4000K,3000K-6000K	3000K/4000K,3000K-6000K	3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V	DC48V
CRI	>90	>90	>90
Beam Angle	200°	250°	320°
Material	Aluminum&PC	Aluminum&PC	Aluminum&PC
Color	Black	Black	Black
Warranty	3 Years	3Years	3Years
Dimensions			



OLEO5 LIGHTS




Model No.	OLEO5-HC7W	OLEO5-HS7W
Power	7W	7W
CCT	3000K,4000K,5000K 3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	24°	24°
Material	Aluminum&PC	Aluminum&PC
Color	Black	Black
Warranty	3 Years	3 Years
Dimensions		

ModelNo.	OLEO5-BD100	OLEO5-DFR300
Power	7W	7W
CCT	3000K,4000K,5000K 3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	105°	105°
Material	Aluminum&PC	Aluminum&PC
Color	Black	Black
Warranty	3 Years	3 Years
Dimensions		






Model No.	OLEO5-HZ7W	OLEO5-TB9W
Power	7W	7W
CCT	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	24°	24°
Material	Aluminum	Aluminum
Color	Black	Black
Warranty	3 Years	3 Years
Dimensions		

Model No.	OLEO5-LBR28	OLEO5-LBR56
Power	5W	10W
CCT	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	60°	60°
Material	Aluminum	Aluminum
Color	Black	Black
Warranty	3 Years	3 Years
Dimensions		

OLEO5 LIGHTS

Note Book:

		
Model No	OLEO5-SR72	OLEO5-SR92
.Power	4W	7W
CCT	3000K,4000K,5000K 3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	24° /36°	24° /36°
Material	Aluminum&PC	Aluminum&PC
Color	Black	Black
Warranty	3 Years	3 Years
Dimensions		
		
Model No.	OLEO5-SR72-F	OLEO5-SR92-F
Power	7W	12W
CCT	3000K,4000K,5000K 3000K/4000K,3000K-6000K	3000K,4000K,5000K 3000K/4000K,3000K-6000K
Voltage	DC48V	DC48V
CRI	>90	>90
Beam Angle	105°	105°
Material	Aluminum	Aluminum
Color	Black	Black
Warranty	3 Years	3 Years
Dimensions		

OLEDER LIGHTING CO., LIMITED
Tel : 86-20-37716973
Cell : 0086-15920570517
Emial : oleever@oleder-lighting.com
r.oyoung@oleder-lighting.com
Web: www.oleder-lux.com
Add.: Room 335,Building 2, #1 Xianke 1st Rd,
Honglitronic Group, Huadu, 510890, Guangzhou, P. R. C.

