

Control Panel CP-PRO




Touch
Operation


23.8-inch high-
definition touch
screen


IP
Intercom


HDBaseT
Input


Automatically turn on
the screen when near


QR code
scanning camera


IC Card
Access


2.4G
Wireless
IoT



Full touch 23.8-inch display terminal

Full-touch 23.8-inch display terminal, resolution: 1920x1080, support multi-touch, brightness: 250nits.

Built-in speaker and microphone

Built-in speaker and pickup, integrated audio coding function, through the supporting host and system platform to realize intelligent management of the accessed IOT terminals. The system platform realizes the functions of remote IP intercom and voice monitoring.

QR code scanning camera

Equipped with QR code scanning camera, supporting QR code reverse scanning function and QR code scanning and opening; inheriting the IC card reading function. Inherit IC card reader, support swipe card power on.

Internet of Things (IoT) Gateway

With IOT gate function, can access the same brand wireless microphone, can access 30-way wireless IOT terminals of the same brand, can access 2 wireless electronic clocks of the same brand, through the matching host and system platform realize the intelligent management of the accessed IOT terminals.


HDBaSeT port output

The supporting host computer through the HDBaseT port connection, the communication distance up to 70 meters, with 2-way USB2.0 interface; with near-field sensing, detect the bright screen function, support independent power supply.

Easy installation with single cable

The original screen and host replacement upgrade, the new screen only need network cable, but also the teacher neat and clean fresh desktop.

Specifications

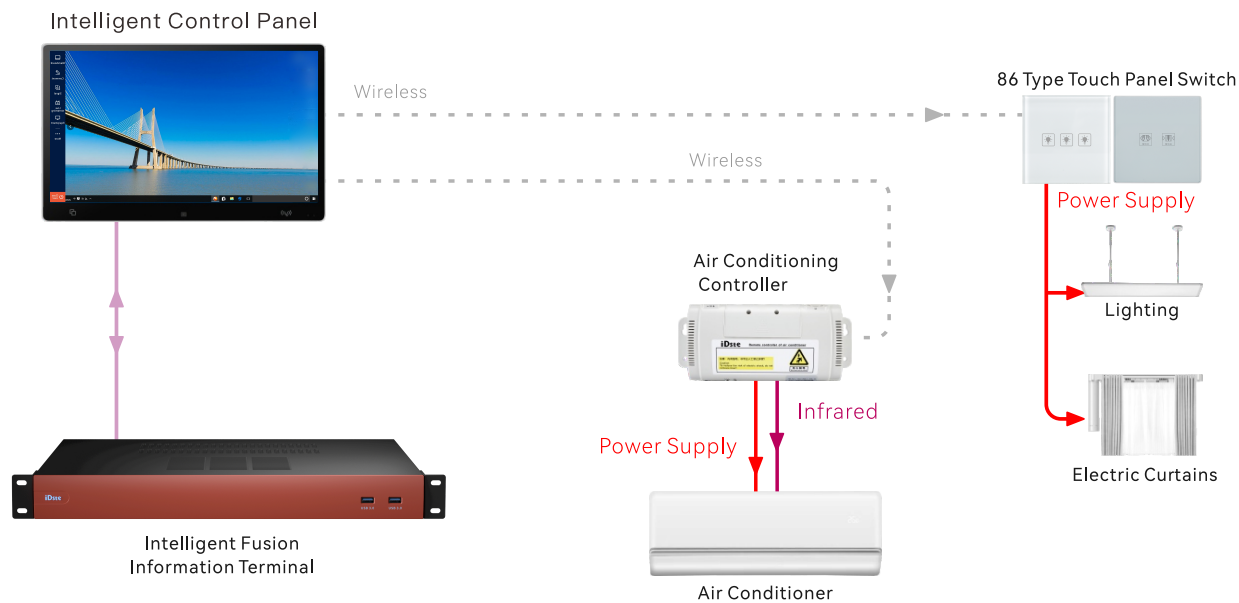

Specifications

Catagory		Parameter
Display	Horizontal Viewing Angle	R/L 89/89
	Vertical Viewing Angle	U/D 89/89
	Screen Size	23.8 inch
	Resolution	1920x1080
	Screen Ratio	16:09
	Backlight	TFT LCD
	Brightness	250nits
	Number of Colours	16.7M
Camera	Lens	5M pixels
	Face Verification Time	10ms
Touch	Touch Type	Capacitive Touch
	Touch Point	10
Interface	Data Transmission Interface	USB2.0*4
Power	Power Consumption	Less than 30W (static desktop)
Working Environment	Operating Temperature	0°C--40°C
	Operating Humidity	20~80%RH
General	Power Supply	DC Power Input/POE
	Power Adapter	12V/4A
Internal Function	Loudspeaker	3W*2
	Microphone	Standard Microphone

