

Club Car DS Front Shock Absorber Installation Instruction

We are striving to build an reliable brand of golf carts parts and accessories.

Hope this manual can assist you to easier install.

For more technical support, please reach us via

Website : www.10101.com

Email : sale_service@10101.com

Facebook : zhong zaiyang


Youtube : 10L0L




Scan To Get
Installation Video

Contents	Qty	Installation Tools	Qty
Club Car DS Front Shock Absorber.....1		7/16-inch (11mm) Spanner.....2	
(See figure 1)		1/2-inch (13mm) Spanner.....1	
		9/16-inch (14mm) Spanner.....2	
		Slotted Screwdriver.....1	
		Cross Screwdriver.....1	

Assembly Diagram

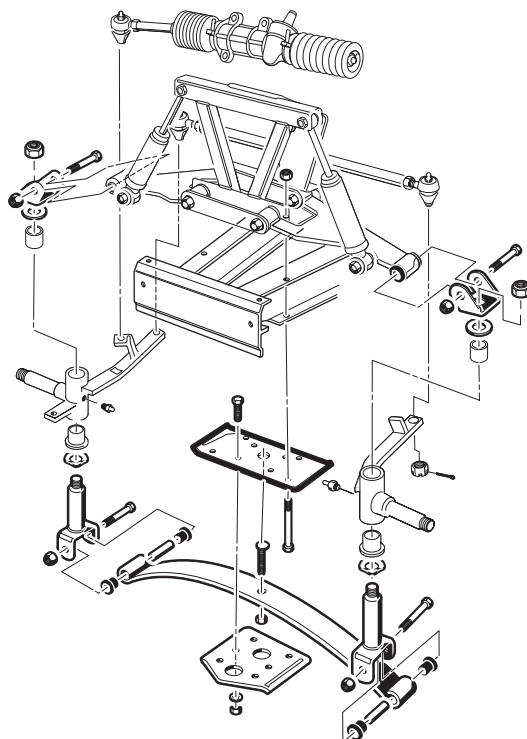

Installation Tools

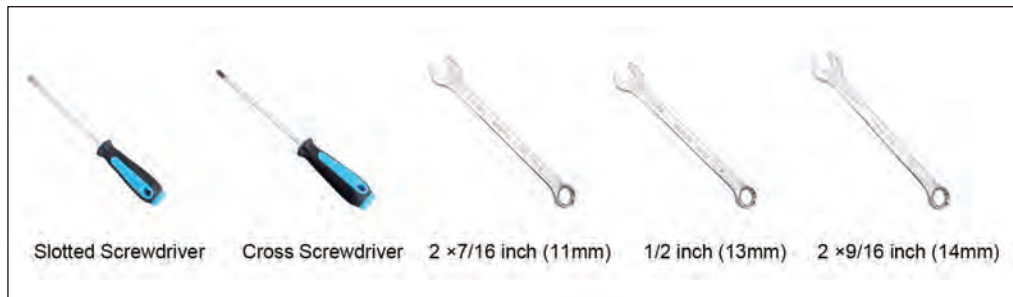

Installation Steps

1. Park the vehicle on level ground.
2. Turn the key to “OFF” position and remove it from the switch.
3. Make sure the parking brake is set.
4. Remove the push type blind rivet of the front body with the slotted screwdriver, and remove the front body.

(See figure 2)
5. Remove the screws on both ends of the front shock absorber with two 9/16-inch (14mm) spanners.

(See figure 3)



6. Remove the front shock absorber.

(See figure 4)



7. Install a new front shock absorber.

(See figure 5)



8. Install the screws on both ends of the front shock absorber with two 9/16-inch (14mm) spanners.

(See figure 6)



9. Install the front body and the push type blind rivet of the front body.

(See figure 7)



This all completes your installation.