

# Club Car DS Rear Brake Drum Installation Instruction

We are striving to build an reliable brand of golf carts parts and accessories.

Hope this manual can assist you to easier install.

For more technical support, please reach us via

Website : [www.10101.com](http://www.10101.com)

Email : [sale\\_service@10101.com](mailto:sale_service@10101.com)

Facebook : zhong zaiyang

Youtube : 10L0L



Scan To Get  
Installation Video

Contents	Qty	Installation Tools	Qty
Club Car DS Rear Brake Drum.....1		3/4-inch (19mm) Socket.....1	
(See figure 1)		Jack.....1	
		Slotted Screwdriver.....1	
		Hammer.....1	

## Installation Tools



Slotted Screwdriver



Jack



3/4 inch (19mm)



Hammer

## Installation Steps

1. Park the vehicle on level ground.

2. Turn the key to "OFF" position and remove it from the switch.

3. Make sure the parking brake is set.

4. Loosen the screws of the rear wheel with the 3/4-inch (19mm) socket.

See figure 2

5. Raise the frame of the rear suspension with the jack to hang the rear wheel in the air.

See figure 3

6. Remove the front wheel; then put the wheel under the chassis (in case the jack accidentally leans or slips down)

See figure 4



7. Unlock the park brake pad.


See figure 5



8. Remove the brake drum.

(Note: If the brake drum is too tight, knock it loose with a hammer.)

See figure 6

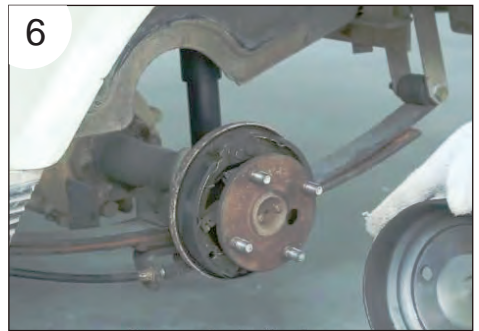

9. Install a new brake drum.

See figure 7



10. Install the rear wheel.

See figure 8



11. Remove the jack.

See figure 9



12. Install the screws of the rear wheel.

Tighten the screws with the 3/4-inch  
(19mm) socket.

See figure 10

This all completes your installation.

