



Golf Cart Retractable Seat Belt Bracket Kit Installation Instruction

We are striving to build an reliable brand of golf carts parts and accessories.

Hope this manual can assist you to easier install.

For more technical support, please reach us via

Website : www.10101.com

Email : sale_service@10101.com

Facebook : zhong zaiyang

Youtube : 10L0L

Contents	Qty	Installation Tools	Qty
Mounting Brackets.....	2	9/16-inch (14mm) Spanner.....	2
Seat belts With Buckles.....	4	3/4-inch (19mm) Spanner.....	1
Shackle Plates.....	4	5/8-inch (17mm) Socket.....	1
Zinc Screws (for bracket).....	6	3/4-inch (19mm) Socket.....	1
Matte Black Screws (for belt).....	8		

Installation Tools



Socket



3/4 inch (19mm)



5/8 inch (17mm)

(See figure 1)



3/4 -inch (19mm)



5/8 inch (17mm)




2× 9/16 inch (14mm)

Installation Steps

1. Park the vehicle on level ground.
2. Turn the key to "OFF" position and remove it from the switch.
3. Make sure the parking brake is set.
4. All components are installed as shown.



See figure 2

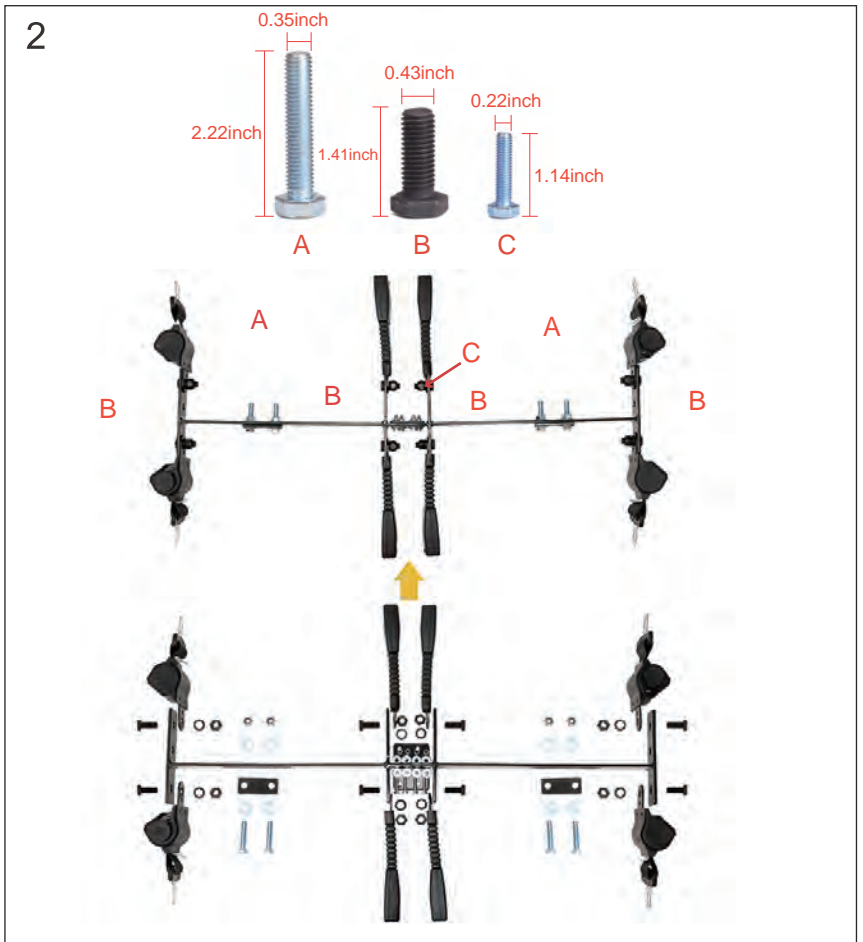

5. Attach the main bracket with the two shackle plates and zinc screws, then tighten the screws with two 9/16-inch (14mm) spanners.

See figure 3



6. Attach the bracket on the rear cart body strut with shackle plates and screws .

See figure 4



7. Install the screws and tighten the screws with a 5/8-inch (17mm) spanner and a 5/8-inch (17mm) socket.

See figure 5



8. Attach the other side of the strut exactly like the former one. Remember keep the bracket 5cm height from the rear cart body.

See figure 6



9. Install the the front belts, tighten the screw with a 3/4-inch (19mm) spanner and a 3/4-inch (19mm) socket.

See figure 7



10. Install the rear belts, tighten the screw slightly. Leave a little clearance to adjust the belt so that it is at an angle to the bracket and tighten the screw with a 3/4-inch (19mm) spanner and a 3/4-inch (19mm) socket.

See figure 8



11. Install the front buckles and make the ends keep some angle to the rear seat. The two buckles should be mirror images of each in the middle of the seat. Tighten the screw with a 3/4-inch (19mm) spanner and a 3/4-inch (19mm) socket.

See figure 9



12. Install the rear buckles and make the ends keep some angle to the rear seat. The two buckles should be mirror images of each in the middle of the seat. Tighten the screw with a 3/4-inch (19mm) spanner and a 3/4-inch (19mm) socket.

See figure 10



13. Adjust the angle of the belts to the front bracket according to your sitting position, and then tighten the screw.

See figure 11



This completes the installation.



Universal Seat Belt Bracket Installation Instructions

Included:

- Seat belt Bracket
- 2 Mounting Brackets
- 4 Bolts
- 4 Anti-Slip Nuts
- 8 Washers



Using mounting brackets and hardware provided, place seat belt bar on the rear seat frame and behind the struts as shown.



CLUB CAR PRECEDENT



CLUB CAR PRECEDENT



Place mounting bracket on the front side of rear struts. Attach mounting bracket to seat belt bracket and tighten as shown.

Universal Seat Belt Bracket Installation Instructions

CLUB CAR DS



For the Club Car DS, place seat belt bracket on top of the rear seat frame as shown in picture 1.




THE PROPER LOCATION OF THE HOLE WILL DEPEND ON THE TYPE OF VEHICLE YOU HAVE

Using mounting brackets, attached seat belt bar to seat frame using hardware provided and tighten as shown in picture 2.

EZGO TXT


For the EZ-GO TXT, place seat belt bracket on the front side of the rear flip seat mounting bracket as shown in picture 1.

Using hardware provided, attach seat belt bar to seat frame and tighten as shown in picture 2.

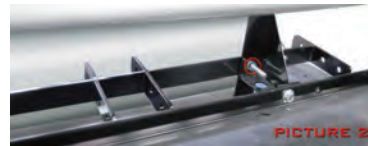

THE PROPER LOCATION OF THE HOLE WILL DEPEND ON THE TYPE OF VEHICLE YOU HAVE

EZGO RXV



For the EZ-Go RXV, place seat belt bracket on top of the rear seat frame as shown in picture 1.



THE PROPER LOCATION OF THE HOLE WILL DEPEND ON THE TYPE OF VEHICLE YOU HAVE

Using mounting brackets, attach seat belt bar to seat kit frame using hardware provided and tighten as shown in picture 2.

Universal Seat Belt Bracket Installation Instructions

YAMAHA DRIVE

For the YAMAHA Drive, place seat belt bracket on top of the rear seat frame as shown in picture 1.

Using mounting brackets, attach seat belt bar to seat frame using hardware provided and tighten as shown in picture 2.



THE PROPER LOCATION OF THE HOLE WILL DEPEND ON THE TYPE OF VEHICLE YOU HAVE

YAMAHA G-SERIES



PICTURE 1




PICTURE 2

THE PROPER LOCATION OF THE HOLE WILL DEPEND ON THE TYPE OF VEHICLE YOU HAVE

For the Yamaha G-Series, place seat belt bracket on top of the rear seat frame as shown in picture 1.

Using mounting brackets, attach seat belt bar to seat frame using hardware provided and tighten as shown in picture 2.



Other installation methods



