



HMC-K980TWS


User manual/ Guarantee

Sincerely thank you for choosing this product in order to use it in right way please read this user manual seriously and keep it after reading.



Packaging contents-articles name- articles specification

This item includes below articles. Please contact us if there is any missing or badness when you first time use.

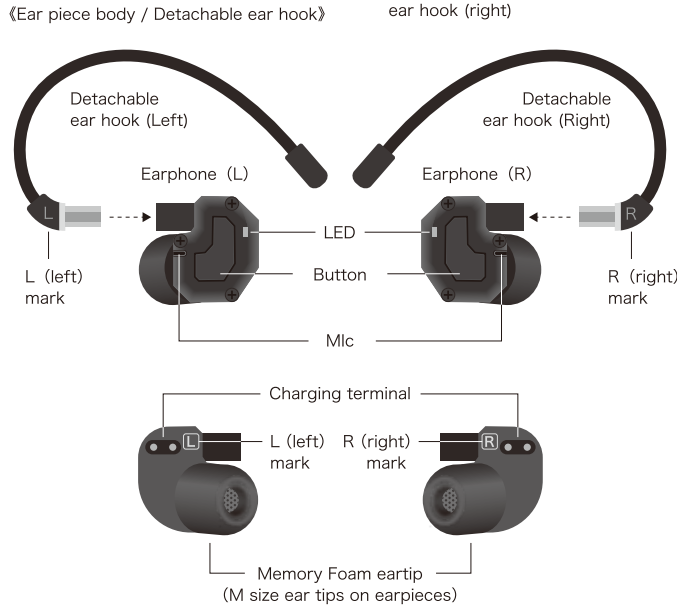


《Silicone ear tips》



L×1set M×1set S×1set

《Charing/portable box》

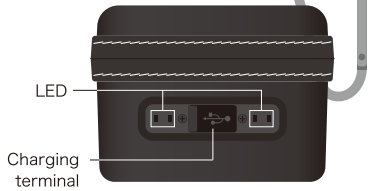

《Charging cable Length: about 25cm》



Bluetooth Specification

Communication mode	: Bluetooth Ver. 5.0
Output	: Bluetooth class 2
Max communication distance	: 10M of visible range
Frequency band	: 2.4GHz
Support profiles	: A2DP, AVRCP, HFP, HSP
Support decoder	: SBC, AAC_LC
Frequency	: 20 - 20,200Hz
Multi pairing	: 10 Devices (keep pairing set records)
Multi point	: Non - correspondence
Max last play time	: about 5 hours
Max phone call time	: about 5 hours
Max standby time	: about 200 hours
Charging box battery	: 700mAh Li - polymer
Self charging time	: about 2 hours


Earphone Specification

Type	: Hybrid
Driver	: φ 10mm Titanium film + Single balanced armature
Magnet	: High magnet force
Play frequency	: 20 - 40,000Hz
Impedance	: 52Ω
Max Input power	: 5mW
Sensitivete	: 105dB/mW
Earphone battery	: 60mAh coin battery
Self charging time	: about 1 hours
Ear tips	: Silicone eartips (L , M , S size ear tips)
Memory foam eartip	: Memory foam eartip (M size ear tips with earpiece)

Pairing and connect for earbuds and devices (the first time)


(First time pairing)

- Take out the earbuds from the charging box, then press and hold the left and right side ear buds buttons at the same time until green light flash. After that it's ready to pairing automatic.
 - ※ Left side LED flashes fast while right side LED flashes slowly (3s/time) means complete pairing, then proceed to next step.
 - ※ Release the button while green light on .



- Turn on the bluetooth of your devices, search available devices, then find out [HMC-K980] among the bluetooth devices, choose it. If HMC-K980 shows connected, it means successful connection.

Turn on the bluetooth find out [HMC-K980] among the bluetooth devices, and choose it




If HMC-K980 shows "connection complete" it means successful connection.



Pairing and connecting for ear buds and devices (from the second time on)

(From the second time on)

- Take out the ear buds from the charging box, then press and hold both left and right side ear buds buttons at the same time until the green light flash . After that, it's ready to pair automatic.
 - ※ Left side LED flashes fast while right side LED flash slowly (3s/time) means complete pairing. Then proceed to the next step
 - ※ Release the button while green light on.
- Turn on the bluetooth of the connected devices and search the available devices. Then find out [HMC-K980] among the bluetooth devices, choose it. If it shows "connected", it means successful connection.



Pair HMC-K980TWS in devices. find out [HMC-K980] among the bluetooth devices, and choose it If HMC-K980TWS shows "connection complete", it means successful connection.


(If connected failed)

The situations of pairing failed "No [HMC-K980] display in the bluetooth devices list" or can't connect while choosing it, Please put the ear buds back to the charging box, reconnect, at once. When putting the earbuds into the box, the power will cut off.

Assembly method of the ear tips and ear hook

2 kinds of ear tips inclusive, Choose the fit size pair for replacement.

- ear tips : silicone eartips (L,M,S size each size one pair)
- Memory Foam eartip (M size ear tips with earpiece)

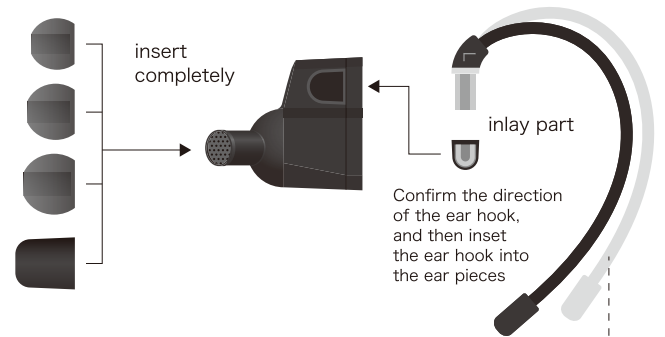

The ear hook is flexible, --- can change the shape freely, adjust it till complete fit your ear.

The changes of ear tips will caused different sound effects. In addition, suitable size ear tips can decrease leaky.

Operation for music play

The function of the left and right buttons is the same, operating either one is feasible.

Open the music App in bluetooth devices first and play music in the device for the first time .

When music playing single press ... pause

When music playing double press ... next

When music playing triple press ... replay last song

※ In the situation of replaying the last song, Please press extra 3 times again after pressing 3 time for replay current song.

When music pause single press to continue



This product can't control volume on ear buds, please adjust the volume on devices when you need artist and music choose, control on devices please. According to differences among different APPs, it may replay current song when triple press the button. Because of differences among different APPs control from the devices may invalid. In this situation, all control in this product will not be available.

Set up for pairing multi devices

(Set up for pairing multi device) ~ memorize history connected devices record function/ max 10 devices~

This item have pairing multi devices function (Record Max 10 bluetooth devices) Obey the instruction of [pairing and connect for ear buds and devices (the first time)] when pairing the devices from the second one on.

※Pairing the devices from the second one on, relieve other connected bluetooth devices first
 ※Pairing the devices from the tenth one on, relieve before connected devices first.



Maximal remain 10 devices record



Operation for phone call

The function of the left and right buttons is the same, operating either one is the same.

※ According to differences among different call softwares, it maybe an issue that external control is invalid .

incoming call single press ... answer the call

In-call single press ... hang up

incoming call press for 3s ... rejection



※ This product can't control volume on ear buds, please adjust volume on devices when you need

Abnormal situations of bluetooth connection (conditions and solutions)

(Disconnect / reasons and solutions for disconnect)

1. There is an obstacle between the device and the earphones (such as the device and the earphones are across the room). In different use situations, it may disconnect time to time.
2. May connect unstable while bluetooth devices connect WIFI simultaneously.
3. May connect unstable when other APPS open/stand by other bluetooth device
4. When earbuds in low battery

[Other solutions]

- ※ Besides the situations above, Please try these solutions when connect off-state.
- Turn off the connection of the earbuds and the device, then reconnect them.
- Relieve the connection between the earbuds and the device, then reconnect. (same to first connect)
- Restart connected device (smart phone, etc)


--- Warning ---

1. This product use a 2.4GHz band of radio waves used in electronics, chemistry, medical equipment, radio waves may disturbed or deviant when the same band equipment close to.
 2. Keep 3m distance at least to other electric devices. there are also cases of radio waves blocking by electronic products.
 3. Please keep away from radio to avoid noise disturbances.
 4. Keep the distances between this product and device in the range of 10m. There are also cases of communication distance shortening due to different space structures or obstacles.
 5. If the wireless equipment is unable to communicate due to its proximity to the radio station, please change the place of communication.
 6. If the product and the connecting device put into the handbag or pocket while working, because of the bluetooth transceiver signal limited transmitted, the sound will be disconnected or have noises.
 7. This product conforms to the technical standard of radio wave method, and does not need the license of radio station for each use.
- ※ Damage caused by the use of this product, our company shall not bear any liability except for legally recognized liability for compensation.
 - ※ We can not assure the product connect all bluetooth devices will successful, our company shall not be liable for any communication error or abnormality of the customer's connection equipment.
 - In order to improve the product, the specifications and appearance will also be changed without notice, please understand
 - We will replace the defective products with new ones for manufacturing reasons.
 - Other responsibilities are not assumed, please understand.

Charging for earbuds and charging box

(Charging for earbuds)


→ Put the earbuds into the charging box to charge when they run out of battery.

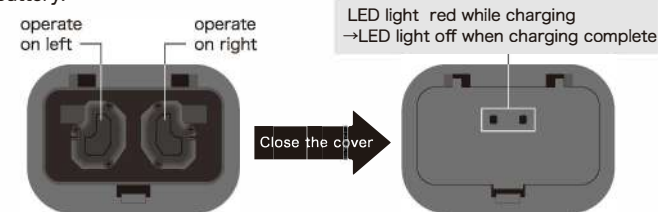

※Once put the earbuds into the box, power will cut off

(Charging for charging box)

Charging the charging box with a cable while the battery below 25% of full capacity.
 · LED lights flash alternately while charging
 · All 4 Led lights are on while charging complete

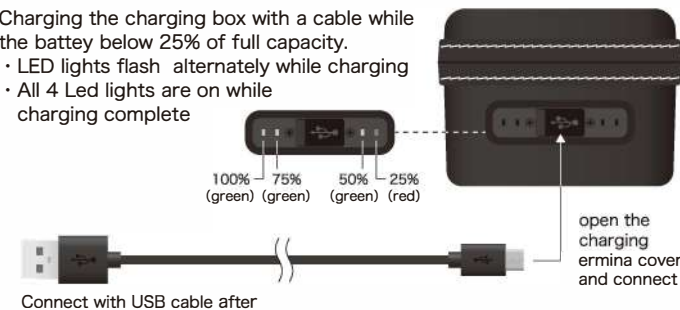

Assurance provisions and guarantee

This guarantee provides for free repair in accordance with the contents recorded, this guarantee shall be invalid in the event that necessary matters are not recorded, so please be sure to keep a complete record.
 1. In case of failure under normal conditions according to the operating instructions, please submit the application to our company or the purchased sales store.
 2. Free repair within the guarantee period, please submit this product and this guarantee to our company or the sales store you purchased.
 3. Repair costs for the following situations during the warranty period.
 ① malfunction and damage caused by repair or modification and misuse.
 ② malfunction and damage caused by fire, earthquake, flood, lightning and other natural disasters, public hazards or abnormal voltage
 ③ malfunction and damage caused by situations that are not normally used (such as long time using)
 ④ This guarantee does not record the date of purchase, customer name , sales name, or the guarantee be changed.
 *This guarantee will not be issued again, please keep it properly.
 *The product won't be guaranteed to keep the data which storded in the customer's equipment if the malfunction and damage occurred. we shall not be liable for any direct or indirect damage.

HMC-K980TWS				
Guarantee period	One year form Purchase date	M	D	Y
Customer	Name			
	ADDRESS			
	PHONE NUMBER			
Sales store				